

Technical Report

**Assessment of the Effectiveness of Neutral Voltage  
Displacement (NVD) Protection in Mitigating the Risks  
Imposed by a Relaxation of Loss-Of-Mains Protection  
Settings Applied to Generation Connected to the Electricity  
Network in Northern Ireland  
(Annexe to Phase 2)**

Prepared by

**Dr Adam Dyśko  
Dr Campbell Booth**

**June 2017**

**Institute for Energy and Environment  
Department of Electronic and Electrical Engineering  
University of Strathclyde  
Glasgow  
G1 1XW**

**REF: NIE/LOM/TR/2017-002**

## Table of Contents

Abbreviations and symbols .....	3
Executive Summary .....	5
1 Introduction .....	7
2 Neutral voltage displacement protection.....	8
2.1 NVD connection and operating principle .....	8
2.2 Effectiveness of NVD operation.....	8
3 Risk level calculations for various values of NDZ .....	9
3.1 Protection setting options and NDZ .....	9
3.2 Risk calculation methodology.....	11
3.2.1 <i>Expected number of LOM occurrences in a single islanding point</i> .....	12
3.2.2 <i>Load and generation profile analysis</i> .....	13
3.2.3 <i>Calculation of national LOM probability figures and individual risk</i> .....	16
3.3 Initial assumptions and available data .....	19
3.3.1 <i>Risk calculation case studies</i> .....	20
3.3.2 <i>Establishing DG technology mixes with NVD</i> .....	20
3.3.3 <i>Potential islanding scenarios and estimated frequency of occurrence</i> .....	22
3.3.4 <i>Probability of NVD protection operation</i> .....	23
3.3.5 <i>Usage of ROCOF and VS within an overall LOM protection scheme</i> .....	23
3.4 Risk calculation results .....	25
4 Conclusions and recommendations .....	30
4.1 Consideration of the impact of various G59 revision options.....	31
4.2 Relative contribution to risk of various generation groups and scenarios .....	33
5 References .....	34
Appendix A: NDZ Assessment results .....	35
A.1. Combined NDZ results (with ROCOF, VS and G59 protection enabled) .....	35
A.2. NDZ results for individual LOM protection elements .....	38
Appendix B: Full record of risk assessment results (Case Study 2.1) .....	42
B.1. Summary Results.....	42
B.2. Detailed results for different generation mixes and load profiles.....	45
B.3. Result figures.....	65
Appendix C: Full record of risk assessment results (Case Study 2.2) .....	70
C.1. Summary Results.....	70
C.2. Detailed results for different generation mixes and load profiles.....	73
C.3. Result figures.....	93
Appendix D: Full record of risk assessment results (Case Study 3) .....	98
D.1. Summary Results .....	98
D.2. Detailed results for different generation mixes and load profiles .....	101
D.3. Result figures .....	121
Appendix E: Full record of risk assessment results (Case Study 4) .....	126
E.1. Summary Results.....	126
E.2. Detailed results for different generation mixes and load profiles.....	127
E.3. Result figures.....	130

## Abbreviations and symbols

AGU	- Aggregated Generator Unit
BSP	- Bulk Supply Point
DRR	- Dynamic Reactive Response
FRC	- Fully-Rated Converter
IC	- Inverter Connected
IM	- Induction Machine
NIE	- Northern Ireland Electricity
NDZ	- Non-Detection Zone
NVD	- Neutral Voltage Displacement
LOM	- Loss-Of-Mains
WFPS	- Wind Farm Power Station
$P_L, Q_L$	- active and reactive power of the load
$P_{DGG}, Q_{DGG}$	- active and reactive power supplied by the group of distributed generators
$NDZ_{PE}, NDZ_{QE}$	- exporting NDZ (generator output is higher than the local load during LOM)
$NDZ_{PI}, NDZ_{QI}$	- importing NDZ (generator output is lower than the local load during LOM)
$T_{NDZmax}$	- maximum permissible duration of undetected islanding operation
$n_{NDZ}$	- number of detected NDZ periods
$T_{load\_record}$	- total length of recorded load profile
$T_{NDZ(k)}$	- length of $k$ -th NDZ period.
$P_2$	- probability of non-detection zone for generator group $P_{DGG}, Q_{DGG}$
$P_3$	- probability of non-detection zone duration being longer than $T_{NDZmax}$
$P_4$	- probability of NVD protection not operating
$N_{LOG,1IP}$	- expected number of incidents of losing supply to a single islanding point in 1 year
$n_{LOG}$	- number of Loss-Of-Grid incidents experienced during the period of $T_{LOG}$ in a population of $n_{IP}$ islanding points
$N_{LOM,1DGG}$	- expected annual number of undetected islanding operations longer than the assumed maximum period $T_{NDZmax}$ for a single DG
$T_{NDZavr}$	- overall average duration of the NDZ
$T_{NVD}$	- NVD protection operating time
$T_{NVD(m,j)}$	- representative NVD operation time delay for generation mix $m$ and capacity band $j$
$T_{LOMavr}$	- overall average duration of the undetected islanded condition
$T_{ARmax}$	- expected maximum time of auto-reclose scheme operation
$n_{DGG(m)}$	- number of all connected distributed generator groups in a given generation mix $m$
$p_{ROCOF(m)}$	- proportion of generators with ROCOF protection in a given generation mix $m$
$LF(m)$	- load factor for a given generation mix $m$
$N_{LOM(m)}$	- expected number of undetected islanding incidents in 1 year (in generation mix $m$ )
$T_{LOM(m)}$	- total aggregated time of undetected islanding conditions in 1 year (in generation mix $m$ )
$P_{LOM(m)}$	- probability of the occurrence of an undetected island within a period of 1 year (in generation mix $m$ )
$N_{LOM}$	- expected national number of undetected islanding incidents in 1 year
$N_{LOM,E}$	- annual rate of occurrence of undetected islanding incidents (with duration longer than $T_{NDZmax} = 0$ s)
$N_{LOM,AR}$	- annual rate of occurrence of undetected islanding incidents (with duration longer than $T_{NDZmax} = 29.5$ s)
$T_{LOM}$	- total aggregated time of undetected islanding conditions in 1 year

$P_{LOM}$	- overall probability of the occurrence of an undetected island within a period of 1 year
$P_{NVDtrip}$	- probability of successful operation of NVD protection
$P_{PER,E}$	- probability of a person in close proximity to an undetected energised islanded part of the system being killed
$P_{PER,G}$	- probability of a person in close proximity of the generator while in operation
$IR$	- annual probability related to individual risk
$IR_E$	- annual probability related to individual risk (injury or death of a person) from the energised parts of an undetected islanded network
$P_{AR}$	- probability of out-of-phase auto-reclosing action following the disconnection of a circuit supplying a primary substation
$N_{OA}$	- annual rate of occurrence of any generator being subjected to out-of-phase auto-reclosure during the islanding condition not detected by LOM protection
$IR_{AR}$	- annual probability related to individual risk from the generator destruction following an out-of-phase auto-reclosure
$T_E$	- expected average time between incidents (injury or death of a person) from the energised parts of an undetected islanded network [in years]
$T_{OA}$	- average time between the occurrences of out-of-phase auto-reclosure during the islanding condition not detected by LOM protection [in years]

## Executive Summary

This document reports on the work commissioned by Northern Ireland Electricity and undertaken by the University of Strathclyde to assess and quantify the levels of risks of undetected islands and the consequent risks to individuals' safety associated with proposed changes to Rate-Of-Change-Of-Frequency (ROCOF), Vector Shift (VS), Over Frequency (OF) and Under Voltage (UV) protection settings. The risk of potential equipment damage through unintentional out-of-phase auto-reclosing is also addressed and quantified.

The content of this report builds upon the activities of work packages WP1, WP2 [1] and WP4 [2], and is concerned with additional risk assessment exercise considering the application of Neutral Voltage Displacement (NVD) protection as a means of reducing the aforementioned safety and equipment damage risks during undetected islanding conditions. This report addresses Phase 2 of the overall exercise, which includes analysis of all distributed generator (DG) capacities below 5 MW, and covers the predominant existing generating technologies, namely synchronous, inverter, induction and DFIG-based generation.

The key outcome of the work reported in this document consists of the estimated risk figures, considering both the risk to an individual's safety from electric shock, and the expected annual rate of occurrence of out-of-phase auto-reclosure when considering the operation (or non-operation) of NVD protection. Following the NIE Networks' practice, the NDV time delay setting was assumed to be 10 s, except for the generators connected at 33 kV level, in which case the delay of 3 s was assumed.

Four different case studies have been considered in the risk calculations and these are defined below:

- Case Study 2.1 - Selected generation (identified by NIE Networks) has NVD, all Aggregated Generator Units (AGUs) connected;
- Case Study 2.2 – Selected generation (as in CS 2.1) has NVD, all AGUs disconnected;
- Case Study 3 - Selected generation (as in CS 2.1) and all AGUs have NVD;
- Case Study 4 - All generation protected by ROCOF set to 0.4 Hz/s, 0 s time delay, no NVD.

It has been established that the levels of risk of accidental electrocution ( $IR_E$ ) during undetected islanded operation under all of the investigated setting options encroaches onto the ALARP region according to the Health and Safety at Work Act 1974 [3]. Although the inclusion of NVD protection does reduce the level of  $IR_E$  risk, the amount of reduction is not major. The maximum achievable risk reduction, considering the situation where all generation indicated by the NIE Networks as well as all AGUs have NVD installed, is approximately 62%. This means that it is not possible for small-scale generation to contain the risk within the broadly acceptable region, even with the inclusion of NVD protection.

The risk of occurrence of out-of-phase auto-reclosures on an annual basis, ( $N_{OA}$ ), can be reduced by the application of NVD protection in a similar manner, but again the reduction of risk is relatively minor. Additional personal risk ( $IR_{AR}$ ) can result from an element (albeit small) of the probability ( $P_{PER,G}$ ) of a person being in close proximity of the generator while it is in operation and suffering a fatal injury as a result of the generator being destroyed by an out-of-phase auto-reclosure. However, an exact estimation of such probabilities depends on the specific generating technology, geographical location, accessibility to the public and/or personnel, and many other factors. Accordingly, this is deemed to be beyond the scope of this work.

The percentage difference between the Phase 2 results included in [2] and the new risk estimates (under various case study assumptions) reported in this document are presented in the table below.

#### Percentage risk reduction due to NVD protection application

LOM Option	LOM Setting [Hz/s] or [°]	Time Delay [s]	Reduction in individual risk of electrocution in [%]			Reduction in risk of out-of-phase reclosure in [%]		
			CS2.1	CS2.2	CS3	CS2.1	CS2.2	CS3
1	0.4	0	33.24	52.89	62.54	33.48	52.86	62.64
2	2.0	0.2	32.53	52.17	61.75	32.58	51.89	61.74
3	1.5	0.3	32.53	52.17	61.75	32.58	51.89	61.74
4	1.5	0.5	32.53	52.17	61.75	32.58	51.89	61.74
5	1.0	0.8	32.73	52.24	61.70	32.70	52.09	61.60
6	6	-	32.22	51.88	61.63	32.28	51.97	61.68
7	12	-	32.22	51.88	61.63	32.28	51.97	61.68
8	-	-	33.24	52.89	62.54	33.48	52.86	62.64

The difference between the result of CS2.1 (all AGUs connected) and CS2.2 (all AGUs disconnected) is approximately 20% on average which is not significant. Therefore, arranging a specific operating regime for those generators would not reduce the risk to acceptable levels.

Considering all available options, and using the results of this study, the recommended setting option which providing an LOM protection solution with the lowest level of risk would be to maintain the existing **ROCOF setting of 0.4 Hz/s with no additional time delay**, and also to change all generation using VS protection to ROCOF. Moreover, introducing NVD requirement for AGUs would provide additional risk reduction of up to 30% compared to the existing situation.

The risk levels calculated in this study are subject to a variety of initial assumptions, including the amount of connected generation, characterisation of the dynamic behaviour of generation, and characterisation of load/generation profiles. Due to a number of pessimistic assumptions used in this study, the absolute risk and rate-of-occurrence values presented in the report are likely to be overestimated. In particular, the assumption of the presence of voltage controllers on all connected generators, as well as the absence of network faults initiating islanding incidents, will have contributed to wider NDZ values being calculated than may actually be the case in reality, and consequently a higher probability of undetected islanding being stated than may actually be the case in practice.

As in the Phase 2 report [2], the study assumed modified over-frequency protection settings (**52 Hz with 1 s time delay**) and two stage under-voltage protection settings (**stage 1: 0.85 pu with 3 s time delay, stage 2: 0.6 pu with 2 s time delay**). These settings meet the system stability criteria and voltage ride through requirements, and do not compromise the sensitivity of the LOM protection.


## 1 Introduction

This document reports on additional outcomes of the project “Assessment of Increased Risks Imposed by a Relaxation of Loss-Of-Mains Protection Settings Applied to Generation Connected to the Electricity Network in Northern Ireland” and specifically quantifies the impact of NVD protection effectiveness in reducing the risk of undetected islanded operation.

The report is an extension of Work Package 4 (WP4) – Investigation and quantification of the risks associated with the relaxation of the ROCOF settings for generation with registered installed capacity up to 5MW [2].

The following sections describe in detail the available data, the modified risk assessment methodology, the results, key observations and recommendations related to the application of NVD protection as a risk reduction measure.

A flowchart illustrating the dependencies of various work packages and tasks in the project is shown in Figure 1. The elements marked in blue had been completed previously while the extension work described in this report is marked in green.

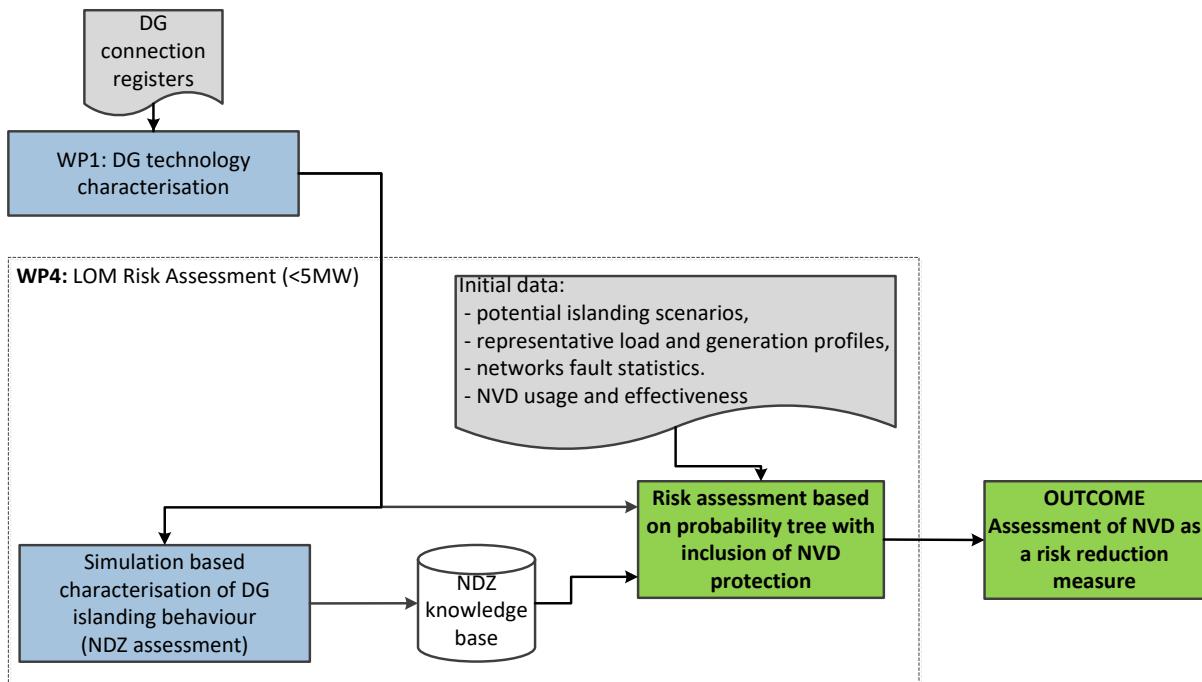

**Figure 1: Position of the NVD study within the existing work packages and tasks**

## 2 Neutral voltage displacement protection

### 2.1 NVD connection and operating principle

NVD protection measures system residual voltage using VTs capable of transforming zero sequence voltage. Either one, five-limb VT, or three individual phase VTs are used for this purpose. The primary side of the VT(s) is star connected and is solidly earthed. The secondary side of the VT(s) is open-delta connected which produces an output proportional to zero sequence voltage. NVD protection is typically time delayed. Within the NIE Networks distribution system, the NVD time delay setting for 33 kV connected generation is 3 s, and for 11 kV/6.6 kV connections, the delay is 10 s. Therefore, in Phase 2 calculations reported in this document, the NDV operation was assumed to be 10 s, except for the cases where smaller generators are connected at 33 kV level (i.e. NVD operation time of 3 s was assumed in such cases).

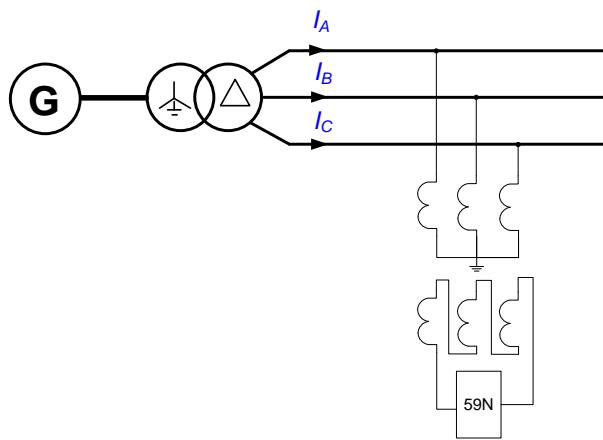


Figure 2. Connection of NVD protection

### 2.2 Effectiveness of NVD operation

The nature of NVD protection is such that its operation is not dependent on the power balance between generation output and the trapped load, as is the case for ROCOF or VS protection, but it is dependent primarily on the network characteristics and the type of fault. Therefore, the application of an NVD relay does not tend to affect the boundaries of the LOM non-detection zone (NDZ).

The effect of NVD is such that either the duration of the undetected island situation is limited to the NVD operation time  $T_{NVD}$  (when there is an earth fault on the system), or the duration of the islanding situation remains unaffected by NVD. Therefore, the reduction of risk that can be achieved is a consequence of the reduction of the duration of an undetected island (i.e. a reduction in the time duration of the occurrence of the safety hazard). However, this is only true for those cases when NVD operates successfully.

For the purposes of this study, it is assumed that NVD protection is effective only in the event of a single phase-to-earth fault being present on an unearthed part of the network, and the fault is sustained longer than the assumed NVD operation time. Therefore, it is understood that all other types of faults do not result in successful operation of NVD. The assumed classification and percentages of different types of faults (based on [4] and agreed through dialogue with NIE Networks) are illustrated in Figure 3. As can be seen from the figure, the faults that are considered detectable by NVD protection are all either permanent earth faults and or transient earth faults with durations greater than 3 s. This results in an overall proportion of 67.2% of all faults being detectable by NVD protection.

Earth Faults (80%)		Phase to Phase Faults (15%)	3-Phase Faults (5%)
Transient (80%)		Permanent (20%)	
Transient <3s (20%)	Transient >3s (80%)		
NVD ineffective	NVD effective ( $80\% \times 20\% + 80\% \times 80\% = 67.2\%$ )		NVD ineffective

**Figure 3. Fault classification and resulting effectiveness of NVD protection**

Additionally, it has been recognised that in scenario 3 (loss of primary substation) an island can be formed either by the failure of the substation supply (i.e. fault at 33 kV) or by protection failure following a fault on one of the 11/6.6 kV feeders. In the former case the single phase to earth fault at 33 kV (after being isolated at the supply point) will not have much impact on the voltage at 11kV where most DG is connected. Therefore, in scenario 3, only the islands formed as a result of 11 kV protection failure have been included as potential candidates for successful NVD operation. The exact numbers of such events are included in Table 5 (section 3.3.3) and the calculation of NVD operation probability (based on those statistics) is explained in section 3.3.4.

### 3 Risk level calculations for various values of NDZ

#### 3.1 Protection setting options and NDZ

A dynamic model (validated in [5]) of a commercially available DG interface relay commonly used in UK practice (MiCOM P341) had been utilised earlier in [6] to assess the extent of NDZ. The NDZ was established separately for the following protective functions:

- ROCOF with five different setting options as indicated in Table 1.
- Voltage Vector Shift (VS) with two different setting options as indicated in Table 1.
- G59 protection including under and over voltage (OV, UV), and under and over frequency (OF, UF), according to most recent recommendations (with OF adjusted to 52 Hz with 1.0 s time delay, and with the suggested two stage UV settings to meet the RfG requirements [7]) as indicated in Table 2.

The tripping signal for each protection function is monitored separately to determine which functions (ROCOF/VS/ OV/UV/OF/UF) are activated for each test case and are recorded where appropriate.

**Table 1: Assumed ROCOF and VS setting options**

Setting Option	LOM protection type	Settings
1	ROCOF	0.4 Hz/z (no time delay)
2	ROCOF	2 Hz/s (200ms time delay)
3	ROCOF	1.5 Hz/s (300ms time delay)
4	ROCOF	1.5 Hz/s (500ms time delay)
5	ROCOF	1 Hz/s (800ms time delay)
6	Vector Shift	6°
7	Vector Shift	12°
8	UV/OV/UF/OF only	Settings as in Table 2
9	ROCOF only LOM protection	0.4 Hz/z (no time delay)

**Table 2: G59 Voltage and Frequency protection settings**

Voltage protection		Voltage [pu]	Time Delay [s]
<b>Under Voltage</b>	Stage 1	0.85	3.0
	Stage 2	0.60	2.0
<b>Over Voltage</b>	Stage 1	1.10	0.5
Frequency protection		Frequency [Hz]	Time Delay [s]
<b>Under Frequency</b>	Stage 1	48	0.5
<b>Over Frequency</b>	Stage 1	52	1.0

In the Phase 2 report [2], the NDZ was determined for both active and reactive power (including import and export) across the PCC. The pre-island imbalance of one type of power (e.g. active) was modified changed while the other type of power (e.g. reactive) was maintained in close balance (i.e. the transfer was across the PCC held as close to zero as possible) by adjusting the local demand (and generator reactive power output if necessary). The power imbalance is expressed as a percentage of the DG rating. The reported values of NDZ are expressed according to the following equations (1).

$$\begin{aligned}
 NDZ_{PI} &= \frac{P_{PCCI}}{S_{DG}} \times 100\%, & NDZ_{PE} &= \frac{P_{PCCE}}{S_{DG}} \times 100\% \\
 NDZ_{QI} &= \frac{Q_{PCCI}}{S_{DG}} \times 100\%, & NDZ_{QE} &= \frac{Q_{PCCE}}{S_{DG}} \times 100\%
 \end{aligned} \tag{1}$$

Where:

$NDZ_{PI}$ ,  $NDZ_{PE}$  - real power NDZ assessed for import and export respectively

$NDZ_{QI}$ ,  $NDZ_{QE}$  - reactive power NDZ assessed for import and export respectively

$P_{PCCI}$ ,  $P_{PCCE}$  - maximum active power across the PCC at which there is no LOM protection operation within the pre-defined acceptable period (defined separately for import and export)

$Q_{PCCI}$ ,  $Q_{PCCE}$  - maximum reactive power across the PCC at which there is no LOM protection operation within the pre-defined acceptable period (defined separately for import and export)

$S_{DG}$  - DG MVA rating

The NDZ was assessed in [2] for 11 different situations (termed as generation mixes), which included single generators as well as groups of two and three different technologies as outlined in Table 3. These generation mixes were established using the outcomes of the DG register analysis performed in WP1 of this work [1]. They represent various islanding groups encountered in scenario 3 (individual primary substation islanding) and scenario 4 (11 kV feeder islanding) and considered both all of the existing connected generation and the contracted generation (Register 2 in [1]). Both scenarios 3 and 4 are represented by the 11 generation mixes listed in Table 3.

As the NDZ is not affected by the operation of NVD protection, the values of NDZ previously obtained in Phase 2 [2], have also been used in this report. For completeness, the NDZ result tables are included here in Appendix A.

**Table 3: DG Generation Mixes**

No of technologies	Generation Mix	SM [%]	IC [%]	IM [%]	DG Capacity [MVA]
1	1	100	-	-	3
	2	-	100	-	
	3	-	-	100	
2	4	80	20	-	3
	5	50	50	-	
	6	70	-	30	
	7	30	-	70	
	8	-	60	40	
	9		20	80	
3	10	50	15	35	
	11	25	20	55	

### 3.2 Risk calculation methodology


The risk calculation methodology adopted in this report is based on the method previously applied in Phase 2 of this work [2]. The modified probability tree is presented in Figure 4 where additional probability element ( $P_4$ ) has been introduced to take into account the unsuccessful LOM detection by NVD protection.

The methodology makes a number of assumptions regarding the type of utility network, and the type and size of the distributed generators and generation technology (refer to section 3.3 for details). It utilises the width of the Non Detection Zone (NDZ) established through detailed dynamic simulation described earlier in the Phase 2 report [2]. Recorded typical utility load and generation profiles (refer to [2]), as well as statistics relating to utility network incidents, including loss of supply to primary substation (islanding scenario 3) and loss of supply to individual 11 kV feeders (islanding scenario 4), are also utilised to estimate probabilities of load-generation matching and islanding incidents.

Additionally, detailed DG connection registers (supplied directly by NIE Networks) were utilised to establish the predominant types of generation mixes in the identified typical islanded situations. The outcome of this analysis has been reported in WP1 and included in the report [1].

By utilising the assumed fault tree presented in Figure 4, the calculations described in the following sub-sections of this report are performed to assess:

- a) personal safety hazard (the term individual risk  $IR_E$  is used in this report to denote the annual probability of death resulting from an undetected LOM condition – as shown in Figure 4a), and
- b) damage to generator occurring as a result of sustained undetected islanded operation of DG combined with likely out-of-phase auto-reclosure (the annual rate of occurrence of out-of-phase auto-reclosure  $N_{OA}$  is used in this report – as shown in Figure 4b).

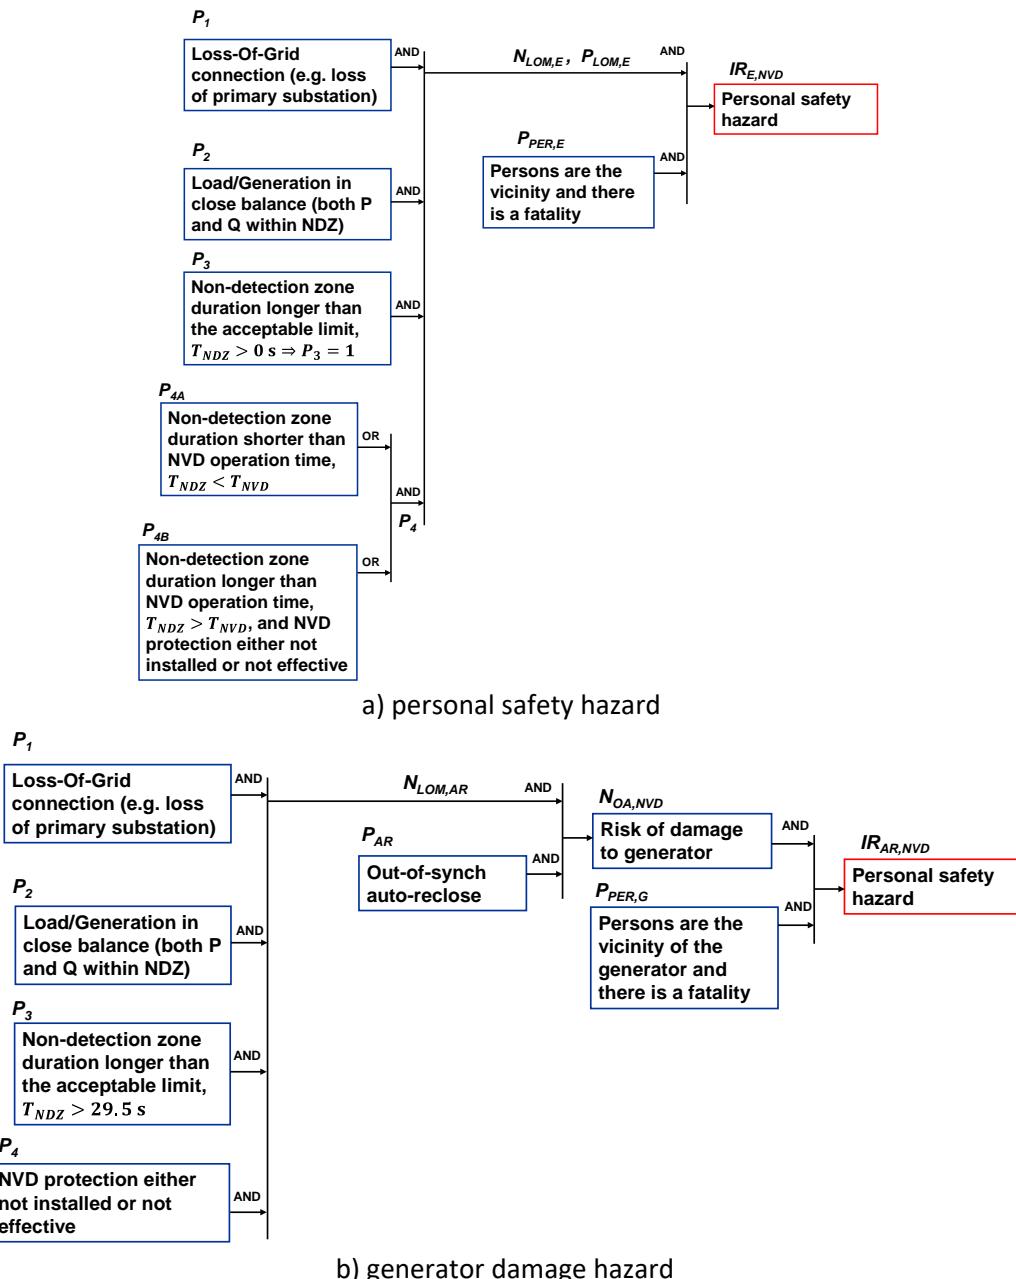

**Figure 4. Modified LOM Safety Hazard Probability Tree (with the inclusion of NVD protection)**

In order to cover all possible islanding scenarios for the range of possible different generation mixes (refer to Table 3), the application of the risk tree calculation is systematically executed for all combinations of islanding situations and the final probability figures are obtained as a weighted average of the individual results. The following subsections explain this process in more detail.

### 3.2.1 Expected number of LOM occurrences in a single islanding point

For a single islanding point (whether an entire substation or an individual circuit), the possibility of an undetected islanding situation arises from the loss of grid supply. Accordingly, the expected number of incidents of losing supply to an individual islanding point ( $N_{LOG,1IP}$ ) during the period of one year can be estimated as follows:

$$N_{LOG,1IP} = \frac{n_{LOG}}{n_{IP} \cdot T_{LOG}} \quad (2)$$

where  $n_{LOG}$  is the total number of loss of supply incidents experienced during the period of  $T_{LOG}$  in a population of  $n_{IP}$  islanding points. The assumed values of  $n_{LOG}$  and  $n_{IP}$  for each islanding scenario have been derived from the network incident statistics, as described in section 3.3.1.

### 3.2.2 Load and generation profile analysis

For each generation mix and each islanding scenario  $m = 1, 2, \dots, 22$  (11 mixes in each scenario, i.e.  $11 \times 2 = 22$  cases) the probabilities  $P_{2(m)}$  and  $P_{3(m)}$  (refer to Figure 4) are calculated jointly by systematic analyses of the example recorded load and generation profiles captured over a period of 1 week with 1 s resolution. This is performed iteratively in two nested loops. The inner loop (iteration  $i$ ) progresses through the whole duration of the given record, while the outer loop (iteration  $j$ ) covers the range of generation mix capacities according to the histogram characteristic of the given mix of technologies. The histograms for all predominant generation mixes were derived from the available DG connection registers and presented in section 2.2 of the report [1]. In each capacity band  $j$  there is a certain number of islanding points  $n_{IP(m,j)}$ . It should be noted that generator maximum output and generator rating are synonymous in the context of this calculation.

Within the inner loop at each time step (iteration  $i$ ), the instantaneous load values  $P_{L(i)}$  and  $Q_{L(i)}$  are compared with the scaled version of the generation profile ( $P_{DGG(m,j,i)}$  and  $Q_{DGG(m,j,i)}$ ) to check if the difference falls within the NDZ established for the specific generation mix. This condition is described by (3).


$$\begin{aligned} -NDZ_{PE(m)} &< P_{L(i)} - P_{DGG(m,j,i)} &< NDZ_{PI(m)} \\ \wedge \\ -NDZ_{QE(m)} &< Q_{L(i)} - Q_{DGG(m,j,i)} &< NDZ_{QI(m)} \end{aligned} \quad (3)$$

Where:

- $P_{L(i)}, Q_{L(i)}$  - recorded samples of active and reactive load power
- $P_{DGG(m,j,i)}, Q_{DGG(m,j,i)}$  - scaled active and reactive generation profile for the generation mix  $m$  and capacity band  $j$
- $NDZ_{PE(m)}, NDZ_{QE(m)}$  - NDZ when generator output is higher than the local load (export) for generation mix  $m$
- $NDZ_{PI(m)}, NDZ_{QI(m)}$  - NDZ when generator output is lower than the local load (import) for generation mix  $m$

When consecutive samples conform to the conditions specified in equation (3), the time is accumulated until the local load exits the NDZ. After all NDZ durations are recorded, they are compared with the representative NVD operation time  $T_{NVD(m,j)}$  of the corresponding generation mix  $m$  and capacity band  $j$ . The value of  $T_{NVD(m,j)}$  is established by averaging the expected NVD operation time for all islanding points  $n_{IP(m,j)}$ . For each islanding point the NVD operating time is assumed to be either 3 s (in the presence of 33 kV connected generation) or 10 s for islanding points with 11 kV connected generation only. A certain proportion of NDZ instances with durations greater than  $T_{NVD(m,j)}$  are shortened to the value of  $T_{NVD(m,j)}$ . These cases represent successful disconnection of the generator by NVD protection and directly correspond to the assumed probability of NVD protection being effective (the value of  $P_{NVDtrip}$  as explained in section 3.3.4). By shortening the NDZ periods in this way, the effect of potential operation of NVD protection on the risk of undetected islanding (indicated in Figure 4 as probability  $P_4$ ) is taken into account. Subsequently, the NDZ duration cumulative distribution function (CDF) is derived, an example of which is presented in Figure 5. As illustrated in

the figure, the probability  $P_{3(m,j)}$  that the NDZ is longer than  $T_{NDZmax}$  can easily be obtained from the CDF.

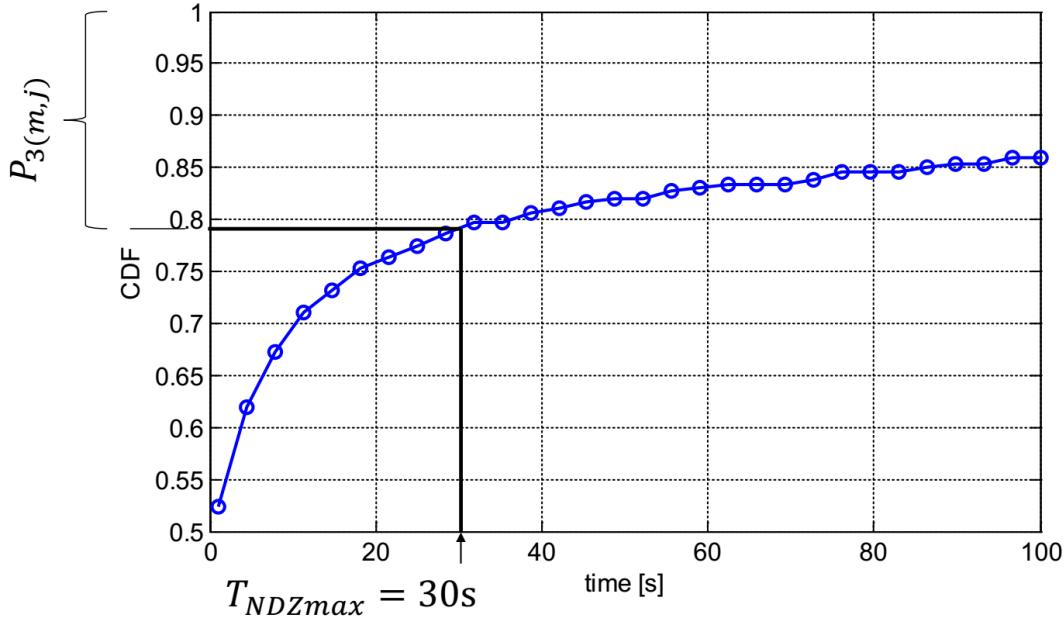

**Figure 5. CDF of an example NDZ duration time**

At the same time, the probability  $P_{2(m,j)}$  of both  $P$  and  $Q$  being within the NDZ is also calculated as a sum of all recorded NDZ periods with respect to the total length of the recorded load profile (4).

$$P_{2(j)} = \sum_{k=1}^{n_{NDZ(m,j)}} \frac{T_{NDZ(m,j,k)}}{T_{load\_record}} \quad (4)$$

Where:


- $n_{NDZ(m,j)}$  - number of detected NDZ periods within the capacity band  $j$
- $T_{load\_record}$  - total length of the recorded load profile
- $T_{NDZ(m,j,k)}$  - length of  $k$ -th NDZ period.

Finally, the joint probability  $P_{23(m,j)}$  for each capacity band  $j$  can be calculated as (5) which leads to the development of the probability density as shown in Figure 6.

$$P_{23(m,j)} = \frac{n_{DG(m,j)}}{n_{DG(m)}} P_{2(m,j)} \cdot P_{3(m,j)} \quad (5)$$

where:

- $n_{DG(m,j)}$  - number of DG islanding groups in the mix  $m$  and the capacity band  $j$
- $n_{DG(m)}$  - total number of DG groups in the generation mix  $m$

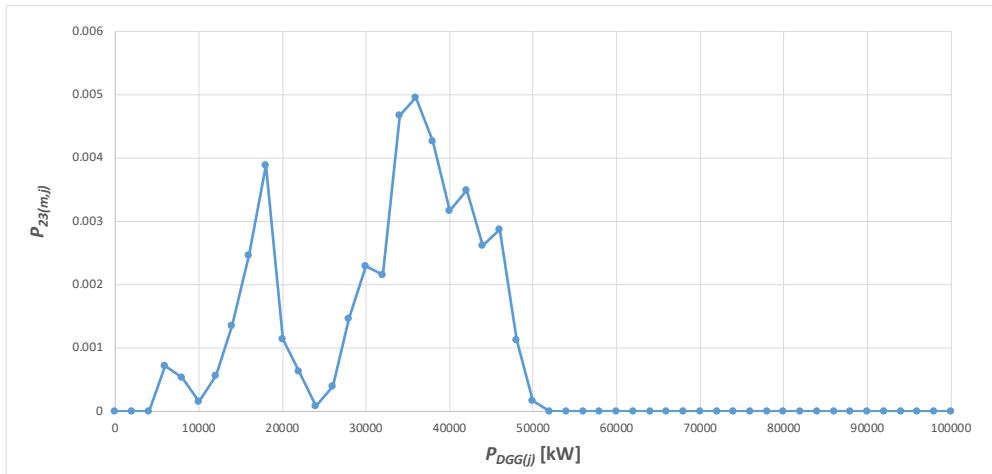

**Figure 6. Non-detection zone probability for varying DG group capacities**

Consequently, according to the principle of marginal probability [8], the combined probability  $P_{23(m)}$ , considering all DG groups of certain mix, is calculated using a simple summation as shown in (6).

$$P_{23(m)} = \sum_{j=1}^{n_{CB(m)}} P_{23(m,j)} \quad (6)$$

Where  $n_{CB(m)}$  is the number of capacity bands.

The expected annual number of undetected islanding operations longer than the assumed maximum period  $T_{NDZmax}$  for an individual DG mix can be calculated as shown in (7).

$$N_{LOM,1DGG(m)} = N_{LOG,1IP} \cdot P_{23(m)} \quad (7)$$

Additionally, the overall average duration of the NDZ for a given mix ( $T_{NDZavr(m)}$ ) is calculated by adding all NDZ durations longer than  $T_{NDZmax}$  from all generator groups and dividing the sum by the total number of NDZ occurrences.

The above process described by equations (3)-(7) is repeated for all of the 17 considered islanding cases. The final figures of  $T_{NDZavr}$  are calculated as a weighted average (8) from all different generation mixes and islanding scenarios ( $m = 1, 2, \dots, 11$  for scenarios 3 and  $m = 12, 13, \dots, 22$  for scenario 4).

$$\begin{aligned} T_{NDZavr,s1} &= \frac{\sum_{m=1}^{11} n_{DGG(m)} \cdot T_{NDZavr(m)}}{\sum_{m=1}^{11} n_{DGG(m)}} \\ T_{NDZavr,s2} &= \frac{\sum_{m=12}^{22} n_{DGG(m)} \cdot T_{NDZavr(m)}}{\sum_{m=12}^{22} n_{DGG(m)}} \\ T_{NDZavr} &= \frac{\sum_{m=1}^{22} n_{DGG(m)} \cdot T_{NDZavr(m)}}{\sum_{m=1}^{22} n_{DGG(m)}} \end{aligned} \quad (8)$$

### 3.2.3 Calculation of national LOM probability figures and individual risk

For each individual case of generation mix  $m$ , the expected annual number of undetected LOM events  $N_{LOM(m)}$  and the probability of an undetected islanded system at any given time  $P_{LOM(m)}$  are established. Firstly, using the known total number of connected DG groups ( $n_{DGG(m)}$ ) with an assumed proportion of ROCOF based LOM protection ( $p_{ROCOF(m)}$ ) and load factor ( $LF_{(m)}$ ), the expected annual number of undetected islanding incidents can be estimated from:

$$N_{LOM(m)} = N_{LOM,1DG(m)} \cdot n_{DGG(m)} \cdot p_{ROCOF(m)} \cdot LF_{(m)} \quad (9)$$

The expected cumulative time of undetected islanding conditions for all considered DG groups  $n_{DGG(m)}$  in mix  $m$  can be estimated using:

$$T_{LOM(m)} = N_{LOM(m)} \cdot (T_{LOMavr(m)} - T_{NDZmax}) \quad (10)$$

where  $T_{LOMavr(m)}$  is the average time that an undetected island can be sustained in mix  $m$ . This time is selected as the minimum value between  $T_{NDZavr(m)}$  and assumed maximum operation time of the auto-reclosing scheme ( $T_{ARmax}$ ). It is assumed that sustained islanded operation following an auto-reclose operation is not possible.

Finally, the overall probability in mix  $m$  of an undetected islanded system at any given time and at specific assumed ROCOF settings is calculated as:

$$P_{LOM(m)} = \frac{T_{LOM(m)}}{T_a} \quad (11)$$

Where:

$T_a$  – period of 1 year

The final figures of  $P_{LOM}$  and  $N_{LOM}$  are calculated as a direct sum of partial results obtained for individual generation mixes ( $m = 1, 2, \dots, 11$  for scenarios 3 and  $m = 12, 13, \dots, 21$  for scenario 4).

$$\begin{aligned} P_{LOM,s1} &= \sum_{m=1}^{11} P_{LOM(m)} \\ P_{LOM,s2} &= \sum_{m=12}^{22} P_{LOM(m)} \\ P_{LOM} &= \sum_{m=1}^{22} P_{LOM(m)} \\ N_{LOM} &= \sum_{m=1}^{22} N_{LOM(m)} \end{aligned} \quad (12)$$

For a single DG group with ROCOF protection in mix  $m$ , the probability can be calculated as:

$$P_{LOM,1DGG(m)} = \frac{P_{LOM}(m)}{n_{DGG}(m) \cdot p_{ROCOF}(m)} \quad (13)$$

In this case, the final figures of  $P_{LOM,DGG}$  are calculated as a weighted average (proportional to the number of DG groups) from all different generation mixes and islanding scenarios ( $m = 1, 2, \dots, 11$  for scenario 3 and  $m = 12, 13, \dots, 22$  for scenario 4).

$$\begin{aligned} P_{LOM,1DGG,S1} &= \frac{\sum_{m=1}^{11} n_{DGG}(m) \cdot P_{LOM,1DGG}(m)}{\sum_{m=1}^{11} n_{DGG}(m)} \\ P_{LOM,1DGG,S2} &= \frac{\sum_{m=12}^{22} n_{DGG}(m) \cdot P_{LOM,1DGG}(m)}{\sum_{m=12}^{22} n_{DGG}(m)} \\ P_{LOM,1DGG} &= \frac{\sum_{m=1}^{22} n_{DGG}(m) \cdot P_{LOM,1DGG}(m)}{\sum_{m=1}^{22} n_{DGG}(m)} \end{aligned} \quad (14)$$

In order to ascertain whether the risk resulting from the proposed adjustment to the ROCOF settings is acceptable, analysis and interpretation of the calculated  $N_{LOM}$  and  $P_{LOM}$  values is required. Note that the values of  $N_{LOM}$  are calculated separately for the purposes of assessing the out-of-phase reclosures (denoted as  $N_{LOM,AR}$ ) where  $T_{NDZmax} = 30$  s was assumed, and for the purposes of individual risk assessment (denoted as  $N_{LOM,E}$ ) where  $T_{NDZmax} = 0$  s was assumed. The final risk calculation is performed using two steps:

- Firstly, the annual expected number of out-of-phase auto-reclosures ( $N_{OA}$ ) during the islanding condition (undetected by LOM protection) is calculated as follows:

$$N_{OA} = N_{LOM,AR} \cdot P_{AR} \quad (15)$$

Where  $N_{LOM,AR}$  is the expected annual number of undetected islanding incidents for out-of-phase reclosure assessment, and  $P_{AR}$  is the probability of an out-of-phase auto-reclosing action following the disconnection of a circuit supplying a primary substation. Considering that auto-reclosing action would occur in the vast majority of cases of losing supply to a primary substation (unless the system is wholly underground) and also considering the fact that reclosure with small angle differences may be safe, a value of  $P_{AR} = 0.8$  was assumed.

- Secondly, the annual probability values are calculated related to perceived individual risk ( $IR$ ). Two sources of  $IR$  are considered: (a) the risk of a fatality due to accidental contact with any elements of the energised undetected island ( $IR_E$ ), and (b) risk of physical injury or death resulting from the generator destruction following an out-of-phase auto-reclosure ( $IR_{AR}$ ). These two indices are calculated as follows:

$$IR_E = N_{LOM,E} \cdot P_{PER,E} \quad (16)$$

$$IR_{AR} = N_{OA} \cdot P_{PER,G} \quad (17)$$

where  $P_{PER,E}$  is the probability of a person being in close proximity to an undetected islanded part of the system and suffering a fatal injury at the same time, and  $P_{PER,G}$  is the probability

of a person being in close proximity of the generator while in operation and suffering fatal injury as a result of the generator being destroyed by an out-of-phase auto-reclosure. The resulting  $IR$  can be then compared with the general criteria for risk tolerability included in the Health and Safety at Work Act 1974 [3] which adopts the risk management principle often referred to as the 'ALARP' or 'As Low as Reasonably Practicable' principle. The ALARP region applies for IR levels between  $10^{-6}$  and  $10^{-4}$ . Risks with probabilities below  $10^{-6}$  can generally be deemed as tolerable. A similar approach has already been used in the risk assessment of NVD protection requirement [9] as well as in the earlier GB system studies [10], [11].

The value of  $P_{PER,E}$  needs further consideration. As statistics relating to injuries resulting directly from undetected islanded systems do not appear to exist, it is difficult to obtain an exact estimation of such occurrences. In [10] the following statistics are presented:

- nearly 5% of all HV faults involve a proximity hazard,
- on average, there are 8.6 fatalities p.a. in GB due to close proximity to electricity networks,
- 90% of these fatalities involve the OHL network,
- there are 800 cases per annum where people are in close proximity to HV OHL interruptions.

Therefore,  $P_{PER,E}$  can be seen as a joint probability of  $P_A = 0.05$  (a person being in the vicinity), and  $P_B$  (the person in the vicinity suffering a fatal injury). Based on the above points the probability of a fatality due to an HV OHL interruption would be  $P_B = \frac{8.6 \cdot 0.9}{800} \cong 0.01$ . However, such probability relates to injuries caused directly by the fault and not by the follow-on period of undetected islanding. It must be emphasised that only additional risk caused by prolonged islanded operation should be included in the calculations for the purposes of assessing the risk of any aspect of the LOM protection. Assuming that the chance of contact with an energised island during the period of up to 30s (maximum realistic period of islanding due to delayed auto-reclose in the NIE Networks system) is the same as the chance of injury during the initial fault occurrence (i.e. 0.01), and also assuming that standard exponential probability distribution ( $f(t) = \lambda e^{-\lambda t}$ ) applies during the islanding period following the fault, the following formula can be used to assess probability of injury from an islanded system.

$$P_{PER,E} = P_A \cdot P_B = P_A \cdot (1 - e^{-\lambda \cdot T_{LOMavr}}) \quad (18)$$

Where:

- $P_A = 0.05$
- $P_B = 1 - e^{-\lambda \cdot T_{LOMavr}}$  (according to cumulative distribution function of  $f(t) = \lambda e^{-\lambda t}$ )
- $T_{LOMavr} = \frac{P_{LOM,E} \cdot T_a}{N_{LOM,E}}$  in [s]

The constant  $\lambda$  is established from the assumption that  $P_B(t \leq 30s) = 0.01$  which results in  $\lambda = -\frac{\ln(1-0.01)}{30} = 3.3501 \times 10^{-4}$ .

The probability  $P_{PER,G}$  will depend on specific circumstances, generator location and operating regime, and therefore, it is beyond the scope of this report to accurately quantify such probabilities. However, it can be generally assumed that while synchronous machines are seriously affected (possibly damaged) by the out-of-phase reclosure, other technologies, such as fixed speed induction machines or fully-rated inverter wind turbines can often ride through such reclosures without much impact on their lifespan. A short analysis which could assist in quantifying the impact of the out-of-phase reclosure on various generation groups/mixes is included in the concluding section 4.2.

The relative difference between the probability of an undetected islanding condition using existing recommended settings, various proposed settings, and also considering the presence of NVD protection provides further guidance as to the best future setting option.

### **3.3 Initial assumptions and available data**

The following assumptions and initial values were made in the case studies presented in this report:

- Generation range considered has a capacity smaller than 5 MW;
- Generation output is represented by an example measured generation profile characteristic of a particular generation technology. Sample generation profiles for wind and biomass-based distributed generation were provided by NIE Networks. For solar generation the profiles formerly used in the GB system study have been applied. All individual generation profiles as well as and the profiles representing various generation mixes can be found in section 4.2.5 of the Phase 2 report [2].
- Inverter connected (IC) generation was assumed to be predominantly solar.
- The load factor (*LF*) was assumed to be 1 for all generation (worst case scenario).
- Based on the DG protection setting records provided by NIE Networks for the purposes of Phase 2 study it was assumed that the usage of ROCOF protection (i.e. percentage of generators having ROCOF relay installed) is 33%, 10% and 12% for Synchronous, inverter connected and induction machine based generation respectively. Regarding VS protection, the assumed percentages were as follows: 67% (SM), 90% (IC) and 88% (IM). Other percentages related to various generation groupings have been derived as described in section 3.3.5.
- Detailed distribution of DG sizes, numbers, predominant groupings, as well as percentage contributions of individual generating technologies within the groups (generation mixes) were obtained from available NIE Networks connection registers and analysed within WP1 [1].
- Ten different load scenarios recorded on selected 33kV and 11 kV circuits and primary substations were used (refer to section 4.2.4 in [2]).
- For the purposes of assessing the probability of out-of-phase reclosure, a period of  $T_{NDZmax} = 29.5$  s (i.e. 30 s minus 0.5 s to allow for standard protection grading time) was assumed as the maximum permissible duration of undetected islanding condition (i.e. no auto-reclosing with a time delays of less than  $T_{NDZmax}$  is expected to occur). However, in assessing individual risk, all islanding durations were included in the calculation, i.e.  $T_{NDZmax} = 0$  s was used.
- The operation time of NVD protection  $T_{NVD}$  is assumed either 3 s (for generation connected at 33 kV) or 10 s (for all remaining generation).
- As the time before the fault is cleared is not technically an islanded situation, it is not considered in this analysis. In other words, the network fault clearance time is assumed to have no impact on the risks associated with the adjustment of the LOM protection settings.
- It is assumed that the generator (or a group of generators) does not continue to supply the system after an out-of-phase auto-reclosing operation.
- A period of  $T_{ARmax} = 30$  s was assumed as the maximum expected time of operation of the auto-reclosing scheme (in other words, regardless of load/generation balance, undetected stable island will not continue to operate longer than  $T_{ARmax}$  due to the impact of out-of-phase reclosure).

### 3.3.1 Risk calculation case studies

In order to guide the decision making process of selecting the best compromise solution for LOM protection of small-scale generation (<5 MW), all risk calculations have been performed under the following case study assumptions:

**Case Study 2 (CS2):** Selected generation (identified by NIE Networks) has NVD protection installed

The risk calculation of Phase 2 [2] were repeated with the assumption that specific generators, indicated by NIE Networks on the existing DG connection registers, are equipped with NVD protection. Those include the following SSG units:

- a. Connected via a ground mounted substation
- b. Capability to export onto the NIE Networks' distribution system
- c. A cold site from an earthing perspective
- d. Not an AGU

In order to assess the feasibility of introducing a running regime of existing AGUs (in hrs/annum) which could ensure that the risk is acceptable, Case Study 2 was performed as two subcases under the following assumptions:

**Case Study 2.1 (CS2.1):** All AGUs are connected and running continuously (maximum risk with  $LF=1$ )

**Case Study 2.2 (CS2.2):** All AGUs are disconnected at all times (minimum risk with  $LF=0$ )

If the acceptable risk level of  $10^{-6}$  appears to be between the minimum and maximum risk figures obtained from CS2.1 and CS2.2 the running regime can be established assuming the risk changes proportionally to the AGU load factor.

**Case Study 3 (CS3):** Selected SSG generation (identified by NIE Networks) and all AGUs have NVD

The risk calculation of Phase 2 [2] was repeated with the assumption that specific generators, indicated by NIE Networks on the existing DG connection registers, and all AGUs are equipped with NVD protection.

**Case Study 4 (CS4):** Transferring Vector Shift protection to ROCOF for all SSG


Risk calculation of Phase 2 [2] was repeated with the assumption that all VS protection relays are replaced by ROCOF based protection with the setting option 1 (0.4 Hz/s, 0 s time delay). For direct comparison with the results of Phase 2, no NVD has been included in this case.

Note: To preserve consistency the cases study numbering used in this report is consistent with the original project extension proposal [12] (i.e. Case Study 1 related to generation >5MW reported separately).

### 3.3.2 Establishing DG technology mixes with NVD

In order to establish the representative mixes of generation technologies with appropriate proportions of each generation in the mix, analysis of the DG register was performed previously and included in WP1 [1]. To derive results which correspond to the most "forward looking" DG connection set, the register which combines existing and all contracted generation has been used. In this report additional

analysis of the updated DG register data (which now includes NVD protection statistics) has been performed to establish the proportion of islanding points where NVD protection is installed on a sufficient amount of generators. The assumption was made that at least 20% of the island's installed capacity need to be equipped with NVD protection in order to successfully de-energise the island. The results are presented in Figure 7 for the considered case studies CS2.1, SC2.2 and CS3.

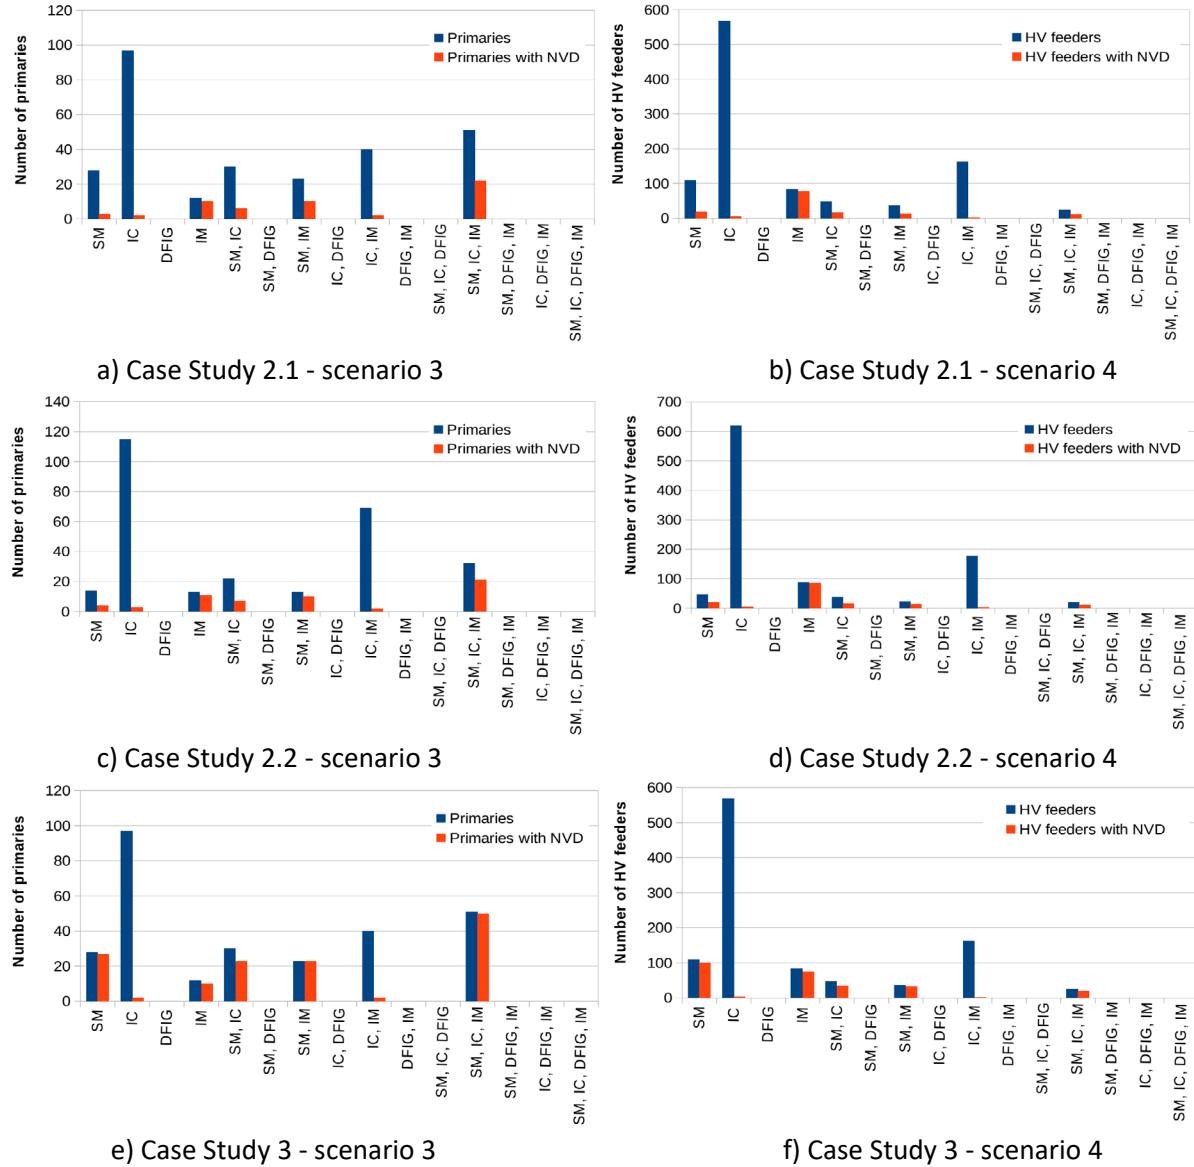

**Figure 7. Islanding groups based on DG Register 2 (connected + contracted DG)**

Considering that there are 11 different generating groups in both scenarios 3 and 4, and also, taking into account the variation in the proportions of individual generating technologies in each group, a set of 11 different generation mixes have been established which cover all groupings in both islanding scenarios. This is summarised in Table 4 and used consistently in the NDZ assessment (refer to section 3.2 in [2]). The same groupings are assumed in the risk assessment calculation included in section 3.4.

**Table 4. Assumed generation groupings (mixes)**

Grouping	Generation Mix
<b>Single</b>	1 (SM 100%)
	2 (IC 100%)
	3 (IM 100%)
<b>Groups of 2</b>	4 (SM 80%, IC 20%)
	5 (SM 50%, IC 50%)
	6 (SM 70%, IM 30%)
	7 (SM 30%, IM 70%)
	8 (IC 60%, IM 40%)
	9 (IC 20%, IM 80%)
<b>Groups of 3</b>	10 (SM 50%, IC 15%, IM 35%)
	11 (SM 25%, IC 20%, IM 55%)

### 3.3.3 Potential islanding scenarios and estimated frequency of occurrence

There are two possible scenarios which can lead to islanding of one or more of generating units up to 50 MW. Scenario 3 considers the loss of grid supply to a primary substation, while scenario 4 involves islanding of an individual 11 kV (or 6.6 kV) feeder. In order to assess the expected annual number of LOM occurrences at an individual islanding point NIE Networks provided a summary of the loss of grid supply incidents based on the company's NAFIRS system. These values are summarised in Table 5. Additionally, the following numbers of potential islanding points were assumed:

- scenario 3 –  $n_{IP,S3} = 250$  (number of primary substations)
- scenario 4 –  $n_{IP,S4} = 1470$  (number of HV feeders)

**Table 5. Loss of grid supply statistics for islanding scenario 3 and 4**

Islanding Scenario	Number of incidents						Total $n_{LOG}$
	2010	2011	2012	2013	2014		
No. of times supply has been lost to a primary substation	3	40	44	34	61	47	<b>226</b>
No. of times supply has been lost to a primary substation as a result of an 11kV protection failure	3	6	9	2	5	10	<b>32</b>
No. of times 11/6.6 kV feeder supplies have been lost	4	584	420	324	509	335	<b>2172</b>

Consequently, using equation (2), the expected number of LOM occurrences in a single islanding point can be calculated for each scenario as follows:

$$\bullet \quad \text{scenario 3} - N_{LOG,1IP,S3} = \frac{n_{LOG,S3}}{n_{IP,S3} \cdot T_{LOG,S3}} = \frac{226}{250 \cdot 5} = 0.18080$$

$$\bullet \quad \text{scenario 4} - N_{LOG,1IP,S4} = \frac{n_{LOG,S4}}{n_{IP,S4} \cdot T_{LOG,S4}} = \frac{2172}{1470 \cdot 5} = 0.29551$$

where  $n_{LOG}$  is the total number of loss of supply incidents experienced during the period of  $T_{LOG}$  (five years in this case) in a population of  $n_{IP}$  islanding points.

### 3.3.4 Probability of NVD protection operation

The probability of successful NVD protection operation of a specific generation mix  $m$  and capacity band  $j$  can be established as:

$$P_{NVDtrip(m,j)} = P_{EF} \cdot P_{NVDinstalled(m,j)} \cdot P_{NVDoperating} \quad (19)$$

Where:

- $P_{EF}$  - probability of NVD being effective (based on fault type analysis included in section 2.2).
- $P_{NVDinstalled(m,j)}$  - probability of NVD being installed in an island (derived from the DG register for each generation mix  $m$  and capacity band  $j$ ). It is assumed that the presence of NVD protection on one of the generating technologies forming a mix is sufficient to de-energise the island. The value  $P_{NVDinstalled(m,j)}$  is calculated as the ratio of the number of islands with NVD to the total number of islands (refer to Figure 7).
- $P_{NVDoperating}$  - probability that the NVD protection will successfully operate during an earth fault. This probability is <1 only if there is a reason to believe (evidenced from network statistics or engineering practice) that some of the earth faults may not be successfully detected by NVD, e.g. high impedance faults or faults on a different part of the network which NVD cannot detect.

The NVD probability calculation used in scenario 3 and 4 are shown in Table 6. In scenario 3 it has been assumed that only the primary substation isolation incidents related to 11 kV feeder protection failures can be successfully detected by NVD protection. The single phase to earth faults on the 33 kV feeders which lead to isolation of a primary substation can only be detected by NVD when there is generation (with NVD) installed at that level. As this is not guaranteed, a pessimistic assumption has been made that NVD does not operate in such cases as 11 kV connected NVD will not experience significant amount of zero sequence voltage when a single phase to earth fault is on an unearthed 33kV feeder.

**Table 6. Assumed probabilities related to operation of NVD protection in scenario 3 and 4**

Scenario	$P_{EF}$	$P_{NVDoperating}$	$P_{NVDtrip(m,j)}$
3	0.672	32/226=0.1416 (only 11 kV protection failures are included – refer to Table 5)	$0.09515 \cdot P_{NVDinstalled(m,j)}$
4	0.672	1	$0.672 \cdot P_{NVDinstalled(m,j)}$

### 3.3.5 Usage of ROCOF and VS within an overall LOM protection scheme

When performing the assessment of the change of settings it is crucial that only those generating units which use a particular type of protection (ROCOF or VS in this case) are included in the final risk figures. Some generators use ROCOF while others use VS (and some use both). This applies to case studies CS2 and CS3 only. In CS4 it is assumed that all generation uses ROCOF protection.

Based on the DG protection setting records provided by NIE Networks it was assumed that the usage of ROCOF and VS protection in individual generating technologies is as follows:

- Synchronous – 33% ROCOF, 67% VS
- Inverter Connected – 10% ROCOF, 90% VS
- Induction Generator – 12% ROCOF, 88% VS

For example, in ROCOF risk calculation, the number of power islands formed by inverter connected DG will be reduced by 90% as only 10% of such generators use ROCOF protection, and therefore, the remaining units are not affected by the change in ROCOF protection settings. When considering multi-generator islands, the level of ROCOF (or VS) protection usage has been derived under the assumption that an island is de-energised if at least one of the technologies is equipped with a ROCOF (or VS) relay. In terms of probability of an island (including  $N$  different technologies) being effectively protected by the specific type of LOM protection (either ROCOF or VS), this can be calculated as follows:

$$P_{ROCOF,VS\_OK} = 1 - P_{NO_{ROCOF,VS}} = 1 - \prod_{i=1}^N (1 - P_{ROCOF,VS(i)}) \quad (20)$$

where  $N$  is a number of different technologies in the group/mix.

Moreover, for more accurate estimation of risk, it is also assumed that in mixed DG islands where both ROCOF and VS protection are in use, the ROCOF protection is always more effective (due to narrower NDZ as evidenced from the results in Appendix A), and therefore, any change to VS settings would not affect the overall risk. Thus, DG islands equipped with VS protection only (as shown in the right hand side column of Table 7) were included in the risk calculation of the setting options 6 and 7.

**Table 7. Assumed ROCOF usage in HV connected generation**

Grouping	Generation Mix	ROCOF Usage	VS Usage	How established?	VS usage applied in risk calculations
Single	1 (SM 100%)	0.330	0.670	Assumed	0.670
	2 (IC 100%)	0.100	0.900		0.900
	3 (IM 100%)	0.120	0.880		0.880
Groups of 2	4 (SM 80%, IC 20%)	0.397	0.967	Derived using equation (19)	0.603
	5 (SM 50%, IC 50%)	0.397	0.967		0.603
	6 (SM 70%, IM 30%)	0.410	0.960		0.590
	7 (SM 30%, IM 70%)	0.410	0.960		0.590
	8 (IC 60%, IM 40%)	0.208	0.988		0.792
	9 (IC 20%, IM 80%)	0.208	0.988		0.792
Groups of 3	10 (SM 50%, IC 15%, IM 35%)	0.469	0.996		0.531
	11 (SM 25%, IC 20%, IM 55%)	0.469	0.996		0.531

### 3.4 Risk calculation results

The full numerical record of probability calculations performed for the two considered islanding scenarios 3 and 4 (with 11 different generation mixes in each scenario), considering ten load profiles (5 profiles in each scenario), and each of the eight LOM protection setting options, is included in the appendices as follows:

- Case Study 2.1 (Selected generation has NVD, AGUs connected) – Appendix B;
- Case Study 2.2 (Selected generation has NVD, AGUs disconnected) – Appendix C;
- Case Study 3 (Selected generation and all AGUs have NVD) – Appendix D;
- Case Study 4 (All generation protected by ROCOF set to 0.4 Hz/s, 0 s time delay) – Appendix E.

The results take into account the fact that G59 (UF/OF/UV/OV) protection is always enabled and trips the generator in situations where ROCOF or VS relay sensitivity is poor. Additionally, for ease of analysis, all results are also presented graphically in Figures 18 to 39. It should be noted that in a number of cases the final probability was equal to zero. In order to represent this result on the graph using a logarithmic scale, a small value of  $10^{-7}$  was used rather than zero. All other non-zero results were always higher than  $10^{-7}$ , so this value can be used as an unambiguous indicator of a zero result.

Considering all load cases, generation mixes and islanding scenarios, the overall probability figures  $N_{LOM}$  and  $P_{LOM}$  have been obtained (based on results in the relevant appendices). Both probability of individual risk ( $IR_E$ ) and expected annual rate of occurrence of out-of-phase auto-reclosure ( $N_{OA}$ ) were calculated using the formulae (16) and (17). The figures were obtained in two different ways: first by using the worst load profile result, and then by averaging the probability figures across all the profiles. Additionally, for convenience of easier comparison the original results from Phase 2 report [2] achieved without considering NVD protection have been included in Tables 12 and 17.

The figures represent the probabilities of the perceived hazards ( $IR$  and  $OA$ ) under eight different ROCOF protection setting options when applied to the existing and contracted generators in the NIE Networks distribution system with ratings above 5 MW. It is important to bear in mind the following points when using these results to inform decision-making processes:

- The presented probability figures are based on connections registers at a specific point in time, which will become out-of-date at some point in the future due to the growing number of DG installations (and changes in DG types).
- The probabilities will increase (or decrease) in proportion to the total number of separate islanding points as well as being dependent on the usage of dedicated ROCOF- and VS-based protection. However, due to generation grouping, the number of islanding points grows at a rate less than the growth rate of the total number of individual DG connections.
- The study does not include assessment of the impact of any changes in practice to change the type of LOM protection or additionally use other forms of LOM protection (e.g. reverse reactive power) in conjunction with existing methods.
- Wherever exact data has not been available, pessimistic assumptions have been made so that the final probability values will ideally never be lower than reality; but this also means that the final figures are potentially and probably higher than reality (however, a degree of pessimism is not necessarily a bad thing in this context).
- The results obtained from the worst case scenario (Tables 8 to 12) are three to four times higher compared to the result based on averaged figures (Tables 13 to 17). It is considered more appropriate to select the averaged figures as being more accurate.

- The results are expressed as probabilities of specific events or occurrences happening over a period of one year. By inverting these values, the average expected times between such occurrences are also calculated (i.e.  $T_E$  and  $T_{OA}$ ).
- The individual risk  $IR_E$  includes the fatalities resulting from the direct contact with energised parts of the undetected islanded system and does not include the risk  $IR_{AR}$  defined in section 3.2.3 as the risk of physical injury or death resulting from the generator destruction following an out-of-phase auto-reclosure. The probability of such occurrences depends on specific circumstances, including generator location, technology and regime of operation, and is beyond the scope of this report. Therefore, the value  $IR_E$  is potentially an underestimate of the total individual risk.
- The risk of LOM settings adjustment must be considered for three different cases. Firstly, if ROCOF settings *only* are changed, then the risk figures (e.g. LOM option 3 in the table) apply under the assumption that no changes are made to VS. Secondly, if VS settings *only* are changed, then the risk figures (e.g. LOM option 7 in the table) apply under the assumption that no changes are made to ROCOF. Thirdly, if both ROCOF and VS settings were changed, then the resultant risk figures would be the sum of the ROCOF-only and VS-only changes (e.g. the summation of the risk figures for LOM options 3 and 7 in the table). Some example calculations are included in section 4.1.

**Table 8. Worst load profile based risk figures for  $P_{LOM}$ ,  $IR_E$  and  $N_{OA}$  (Case Study 2.1)**

LOM Option	LOM Setting [Hz/s] or [°]	Time Delay [s]	Individual risk of electrocution			Risk of out-of-phase reclosure		
			$N_{LOM,E}$	$IR_E$	$T_E$ [years]	$N_{LOM,AR}$	$N_{OA}$	$T_{OA}$ [years]
1	0.4	0	4.65E-01	4.34E-05	2.30E+04	8.65E-02	6.92E-02	14.45
2	2.0	0.2	5.42E-01	4.93E-05	2.03E+04	9.81E-02	7.85E-02	12.74
<b>3*</b>	<b>1.5</b>	<b>0.3</b>	<b>5.42E-01</b>	<b>4.93E-05</b>	<b>2.03E+04</b>	<b>9.81E-02</b>	<b>7.85E-02</b>	<b>12.74</b>
4	1.5	0.5	5.42E-01	4.93E-05	2.03E+04	9.81E-02	7.85E-02	12.74
5	1.0	0.8	5.36E-01	4.89E-05	2.05E+04	9.73E-02	7.79E-02	12.84
6	6	-	7.85E-01	7.12E-05	1.40E+04	1.42E-01	1.13E-01	8.81
<b>7*</b>	<b>12</b>	<b>-</b>	<b>7.85E-01</b>	<b>7.12E-05</b>	<b>1.40E+04</b>	<b>1.42E-01</b>	<b>1.13E-01</b>	<b>8.81</b>
8	-	-	1.33E+00	1.20E-04	8.30E+03	2.40E-01	1.92E-01	5.21

**Table 9. Worst load profile based risk figures for  $P_{LOM}$ ,  $IR_E$  and  $N_{OA}$  (Case Study 2.2)**

LOM Option	LOM Setting [Hz/s] or [°]	Time Delay [s]	Individual risk of electrocution			Risk of out-of-phase reclosure		
			$N_{LOM,E}$	$IR_E$	$T_E$ [years]	$N_{LOM,AR}$	$N_{OA}$	$T_{OA}$ [years]
1	0.4	0	3.91E-01	3.03E-05	3.30E+04	6.04E-02	4.83E-02	20.69
2	2.0	0.2	4.54E-01	3.43E-05	2.92E+04	6.83E-02	5.47E-02	18.30
<b>3*</b>	<b>1.5</b>	<b>0.3</b>	<b>4.54E-01</b>	<b>3.43E-05</b>	<b>2.92E+04</b>	<b>6.83E-02</b>	<b>5.47E-02</b>	<b>18.30</b>
4	1.5	0.5	4.54E-01	3.43E-05	2.92E+04	6.83E-02	5.47E-02	18.30
5	1.0	0.8	4.49E-01	3.40E-05	2.94E+04	6.77E-02	5.42E-02	18.45
6	6	-	6.57E-01	4.96E-05	2.02E+04	9.88E-02	7.90E-02	12.65
<b>7*</b>	<b>12</b>	<b>-</b>	<b>6.57E-01</b>	<b>4.96E-05</b>	<b>2.02E+04</b>	<b>9.88E-02</b>	<b>7.90E-02</b>	<b>12.65</b>
8	-	-	1.11E+00	8.39E-05	1.19E+04	1.67E-01	1.34E-01	7.48

**Table 10. Worst load profile based risk figures for  $P_{LOM}$ ,  $IR_E$  and  $N_{OA}$  (Case Study 3)**

LOM Option	LOM Setting [Hz/s] or [ $^{\circ}$ ]	Time Delay [s]	Individual risk of electrocution			Risk of out-of-phase reclosure		
			$N_{LOM,E}$	$IR_E$	$T_E$ [years]	$N_{LOM,AR}$	$N_{OA}$	$T_{OA}$ [years]
1	0.4	0	3.52E-01	2.40E-05	4.17E+04	4.77E-02	3.82E-02	26.20
2	2.0	0.2	4.09E-01	2.70E-05	3.71E+04	5.37E-02	4.30E-02	23.27
<b>3*</b>	<b>1.5</b>	<b>0.3</b>	<b>4.09E-01</b>	<b>2.70E-05</b>	<b>3.71E+04</b>	<b>5.37E-02</b>	<b>4.30E-02</b>	<b>23.27</b>
4	1.5	0.5	4.09E-01	2.70E-05	3.71E+04	5.37E-02	4.30E-02	23.27
5	1.0	0.8	4.05E-01	2.68E-05	3.73E+04	5.34E-02	4.27E-02	23.40
6	6	-	5.92E-01	3.90E-05	2.57E+04	7.76E-02	6.21E-02	16.11
<b>7*</b>	<b>12</b>	<b>-</b>	<b>5.92E-01</b>	<b>3.90E-05</b>	<b>2.57E+04</b>	<b>7.76E-02</b>	<b>6.21E-02</b>	<b>16.11</b>
8	-	-	1.00E+00	6.59E-05	1.52E+04	1.31E-01	1.05E-01	9.52

**Table 11. Worst load profile based risk figures for  $P_{LOM}$ ,  $IR_E$  and  $N_{OA}$  (Case Study 4)**

LOM Option	LOM Setting [Hz/s] or [ $^{\circ}$ ]	Time Delay [s]	Individual risk of electrocution			Risk of out-of-phase reclosure		
			$N_{LOM,E}$	$IR_E$	$T_E$ [years]	$N_{LOM,AR}$	$N_{OA}$	$T_{OA}$ [years]
9	0.4	0	1.33E+00	1.60E-04	6.24E+03	3.19E-01	2.55E-01	3.92

**Table 12. Worst load profile based risk figures for  $P_{LOM}$ ,  $IR_E$  and  $N_{OA}$  (without NVD) – Phase 2 [2]**

LOM Option	LOM Setting [Hz/s] or [ $^{\circ}$ ]	Time Delay [s]	Individual risk of electrocution			Risk of out-of-phase reclosure		
			$N_{LOM,E}$	$IR_E$	$T_E$ [years]	$N_{LOM,AR}$	$N_{OA}$	$T_{OA}$ [years]
1	0.4	0	5.47E-01	6.57E-05	1.52E+04	1.31E-01	1.05E-01	9.54
2	2.0	0.2	6.34E-01	7.42E-05	1.35E+04	1.48E-01	1.18E-01	8.46
<b>3*</b>	<b>1.5</b>	<b>0.3</b>	<b>6.34E-01</b>	<b>7.42E-05</b>	<b>1.35E+04</b>	<b>1.48E-01</b>	<b>1.18E-01</b>	<b>8.46</b>
4	1.5	0.5	6.34E-01	7.42E-05	1.35E+04	1.48E-01	1.18E-01	8.46
5	1.0	0.8	6.28E-01	7.37E-05	1.36E+04	1.47E-01	1.17E-01	8.52
6	6	-	9.17E-01	1.07E-04	9.34E+03	2.13E-01	1.71E-01	5.86
<b>7*</b>	<b>12</b>	<b>-</b>	<b>9.17E-01</b>	<b>1.07E-04</b>	<b>9.34E+03</b>	<b>2.13E-01</b>	<b>1.71E-01</b>	<b>5.86</b>
8	-	-	1.55E+00	1.81E-04	5.52E+03	3.61E-01	2.89E-01	3.46

**Table 13. Risk figures obtained through averaging of all load profiles (Case Study 2.1)**

LOM Option	LOM Setting [Hz/s] or [°]	Time Delay [s]	Individual risk of electrocution			Risk of out-of-phase reclosure		
			$N_{LOM,E}$	$IR_E$	$T_E$ [years]	$N_{LOM,AR}$	$N_{OA}$	$T_{OA}$ [years]
1	0.4	0	1.03E-01	9.48E-06	1.06E+05	1.89E-02	1.51E-02	66.23
2	2.0	0.2	1.25E-01	1.12E-05	8.94E+04	2.23E-02	1.78E-02	56.09
<b>3*</b>	<b>1.5</b>	<b>0.3</b>	<b>1.25E-01</b>	<b>1.12E-05</b>	<b>8.94E+04</b>	<b>2.23E-02</b>	<b>1.78E-02</b>	<b>56.09</b>
4	1.5	0.5	1.25E-01	1.12E-05	8.94E+04	2.23E-02	1.78E-02	56.09
5	1.0	0.8	1.23E-01	1.11E-05	9.01E+04	2.21E-02	1.77E-02	56.52
6	6	-	1.81E-01	1.62E-05	6.19E+04	3.22E-02	2.58E-02	38.82
<b>7*</b>	<b>12</b>	<b>-</b>	<b>1.81E-01</b>	<b>1.62E-05</b>	<b>6.19E+04</b>	<b>3.22E-02</b>	<b>2.58E-02</b>	<b>38.82</b>
8	-	-	3.05E-01	2.74E-05	3.66E+04	5.45E-02	4.36E-02	22.94

**Table 14. Risk figures obtained through averaging of all load profiles (Case Study 2.2)**

LOM Option	LOM Setting [Hz/s] or [°]	Time Delay [s]	Individual risk of electrocution			Risk of out-of-phase reclosure		
			$N_{LOM,E}$	$IR_E$	$T_E$ [years]	$N_{LOM,AR}$	$N_{OA}$	$T_{OA}$ [years]
1	0.4	0	8.68E-02	6.69E-06	1.50E+05	1.33E-02	1.07E-02	93.86
2	2.0	0.2	1.06E-01	7.94E-06	1.26E+05	1.58E-02	1.27E-02	79.01
<b>3*</b>	<b>1.5</b>	<b>0.3</b>	<b>1.06E-01</b>	<b>7.94E-06</b>	<b>1.26E+05</b>	<b>1.58E-02</b>	<b>1.27E-02</b>	<b>79.01</b>
4	1.5	0.5	1.06E-01	7.94E-06	1.26E+05	1.58E-02	1.27E-02	79.01
5	1.0	0.8	1.04E-01	7.88E-06	1.27E+05	1.57E-02	1.26E-02	79.61
6	6	-	1.53E-01	1.15E-05	8.71E+04	2.29E-02	1.83E-02	54.66
<b>7*</b>	<b>12</b>	<b>-</b>	<b>1.53E-01</b>	<b>1.15E-05</b>	<b>8.71E+04</b>	<b>2.29E-02</b>	<b>1.83E-02</b>	<b>54.66</b>
8	-	-	2.59E-01	1.94E-05	5.15E+04	3.87E-02	3.10E-02	32.31

**Table 15. Risk figures obtained through averaging of all load profiles (Case Study 3)**

LOM Option	LOM Setting [Hz/s] or [°]	Time Delay [s]	Individual risk of electrocution			Risk of out-of-phase reclosure		
			$N_{LOM,E}$	$IR_E$	$T_E$ [years]	$N_{LOM,AR}$	$N_{OA}$	$T_{OA}$ [years]
1	0.4	0	7.85E-02	5.32E-06	1.88E+05	1.06E-02	8.48E-03	117.97
2	2.0	0.2	9.59E-02	6.35E-06	1.57E+05	1.26E-02	1.01E-02	98.84
<b>3*</b>	<b>1.5</b>	<b>0.3</b>	<b>9.59E-02</b>	<b>6.35E-06</b>	<b>1.57E+05</b>	<b>1.26E-02</b>	<b>1.01E-02</b>	<b>98.84</b>
4	1.5	0.5	9.59E-02	6.35E-06	1.57E+05	1.26E-02	1.01E-02	98.84
5	1.0	0.8	9.49E-02	6.32E-06	1.58E+05	1.26E-02	1.01E-02	99.35
6	6	-	1.39E-01	9.17E-06	1.09E+05	1.83E-02	1.46E-02	68.48
<b>7*</b>	<b>12</b>	<b>-</b>	<b>1.39E-01</b>	<b>9.17E-06</b>	<b>1.09E+05</b>	<b>1.83E-02</b>	<b>1.46E-02</b>	<b>68.48</b>
8	-	-	2.35E-01	1.55E-05	6.44E+04	3.09E-02	2.47E-02	40.45

**Table 16. Risk figures obtained through averaging of all load profiles (Case Study 4)**

LOM Option	LOM Setting [Hz/s] or [°]	Time Delay [s]	Individual risk of electrocution			Risk of out-of-phase reclosure		
			$N_{LOM,E}$	$IR_E$	$T_E$ [years]	$N_{LOM,AR}$	$N_{OA}$	$T_{OA}$ [years]
9	0.4	0	2.93E-01	3.47E-05	2.88E+04	6.91E-02	5.53E-02	18.10

**Table 17. Risk figures obtained through averaging of all load profiles (without NVD) – Phase 2 [2]**

LOM Option	LOM Setting [Hz/s] or [°]	Time Delay [s]	Individual risk of electrocution			Risk of out-of-phase reclosure		
			$N_{LOM,E}$	$IR_E$	$T_E$ [years]	$N_{LOM,AR}$	$N_{OA}$	$T_{OA}$ [years]
1	0.4	0	1.20E-01	1.42E-05	7.03E+04	2.83E-02	2.27E-02	44.10
2	2.0	0.2	1.45E-01	1.66E-05	6.03E+04	3.30E-02	2.64E-02	37.83
<b>3*</b>	<b>1.5</b>	<b>0.3</b>	<b>1.45E-01</b>	<b>1.66E-05</b>	<b>6.03E+04</b>	<b>3.30E-02</b>	<b>2.64E-02</b>	<b>37.83</b>
4	1.5	0.5	1.45E-01	1.66E-05	6.03E+04	3.30E-02	2.64E-02	37.83
5	1.0	0.8	1.43E-01	1.65E-05	6.07E+04	3.28E-02	2.63E-02	38.07
6	6	-	2.10E-01	2.39E-05	4.18E+04	4.77E-02	3.81E-02	26.22
<b>7*</b>	<b>12</b>	<b>-</b>	<b>2.10E-01</b>	<b>2.39E-05</b>	<b>4.18E+04</b>	<b>4.77E-02</b>	<b>3.81E-02</b>	<b>26.22</b>
8	-	-	3.54E-01	4.05E-05	2.47E+04	8.07E-02	6.46E-02	15.49

\*Recommended ROCOF and VS settings (in bold) in Phase 2 report [2].

Where:

$N_{LOM,E}$  - annual rate of occurrence of undetected islanding incidents (with duration longer than  $T_{NDZmax} = 0$  s)

$IR_E$  - annual probability related to individual risk (injury or death of a person) from the energised parts of an undetected islanded network

$T_E$  - average duration between incidents (injury or death of a person) from the energised parts of an undetected islanded network [in years]

$N_{LOM,AR}$  - annual rate of occurrence of undetected islanding incidents (with duration longer than  $T_{NDZmax} = 29.5$  s)

$N_{OA}$  - annual rate of occurrence of any generator being subjected to out-of-phase auto-reclosure during the islanding condition not detected by LOM protection

$T_{OA}$  - average duration between the occurrences of out-of-phase auto-reclosure during the islanding condition not detected by LOM protection [in years]

## 4 Conclusions and recommendations

From analyses of the results presented in this report, the following general observations and recommendations can be made:

- The key outcome of the Phase 2 annex consists of the estimated risk figures, considering both the probability of individual risk of electrocution ( $IR_E$ ), and the expected annual rate of occurrence of out-of-phase auto-reclosure ( $N_{OA}$ ) when considering the operation of NVD protection.
  - a) In particular, risk related to accidental electrocution ( $IR_E$ ) during the undetected islanding operation under all investigated setting options encroaches onto the ALARP region according to the Health and Safety at Work Act 1974 [3]. Although the inclusion of NVD protection has resulted in the reduction of the  $IR_E$  risk, the amount of reduction cannot be considered major. The percentage difference between the Phase 2 results (refer to Table 17) and the new risk estimates (presented in Tables 13 to 15) has been included in Table 18. It can be seen that the maximum achievable risk reduction in CS3 (generation indicated by NIE Networks and all AGUs have NVD installed) is approximately 62%. This means that with the use of NVD it is not possible for small-scale generation to contain the risk within the broadly acceptable region.
  - b) Regarding the expected annual occurrence of out-of-phase auto-reclosures ( $N_{OA}$ ), the risk has been reduced by the application of NVD protection in a similar manner. In the worst case this would have a value of 0.00436 per annum (CS2.1 under setting option 8 where ROCOF and VS are both disabled; refer to Table 13), which means that one incident would be expected on average every  $\frac{1}{0.0436} \cong 22.9$  years (15.48 years without NVD has been obtained previously). Again, the reduction of risk is relatively minor. Additional personal risk ( $IR_{AR}$ ) can result from an element (albeit small) of the probability ( $P_{PER,G}$ ) of a person being in close proximity of the generator while it is in operation and suffering a fatal injury as a result of the generator being destroyed by an out-of-phase auto-reclosure, but the exact estimation of such probabilities depends on the specific generating technology, geographical location, and many other factors, and therefore, is beyond the scope of this work.

**Table 18. Percentage risk reduction due to NVD protection application**

LOM Option	LOM Setting [Hz/s] or [°]	Time Delay [s]	Reduction in individual risk of electrocution			Reduction in risk of out-of-phase reclosure		
			CS2.1 [%]	CS2.2 [%]	CS3 [%]	CS2.1 [%]	CS2.2 [%]	CS3 [%]
1	0.4	0	33.24	52.89	62.54	33.48	52.86	62.64
2	2.0	0.2	32.53	52.17	61.75	32.58	51.89	61.74
3	1.5	0.3	32.53	52.17	61.75	32.58	51.89	61.74
4	1.5	0.5	32.53	52.17	61.75	32.58	51.89	61.74
5	1.0	0.8	32.73	52.24	61.70	32.70	52.09	61.60
6	6	-	32.22	51.88	61.63	32.28	51.97	61.68
7	12	-	32.22	51.88	61.63	32.28	51.97	61.68
8	-	-	33.24	52.89	62.54	33.48	52.86	62.64

- The difference between the result of CS2.1 (all AGUs connected) and CS2.2 (all AGUs disconnected) is approximately 20% on average (based on Table 18) which is not significant. Therefore, arranging a specific operating regime for those generators would not reduce the risk to acceptable levels.
- Considering all available options, based on the results of this study, the recommended setting which provides the LOM protection solution with the lowest risk would be option 9, which is to maintain the existing **ROCOF setting of 0.4 Hz/s with no additional time delay**, and at the same time, to change all generation using VS protection to ROCOF. Moreover, introducing NVD requirement for AGUs would provide additional risk reduction of up to 30% (assuming all AGUs are connected) compared to the existing situation.
- The risk levels calculated in this study are subject to a variety of initial assumptions, including the amount of connected generation, characterisation of the dynamic behaviour of generation, and characterisation of load/generation profiles. Due to a number of pessimistic assumptions used in this study, the absolute risk and rate-of-occurrence values presented in the report are likely to be overestimated. In particular, the assumption of the presence of voltage controllers on all connected generators, as well as the absence of network faults during islanding incidents, will have contributed to wider NDZ values being calculated than may actually be the case in reality, and consequently a higher probability of undetected islanding being stated than may actually be the case in practice.
- As in Phase 2 report [2] the study assumed modified over-frequency protection setting (**52 Hz with 1s time delay**) and two stage under-voltage protection settings (**stage 1: 0.85 pu with 3s time delay, stage 2: 0.6 pu with 2 s time delay**). These settings meet the system stability criteria and voltage ride through requirements, and do not compromise the sensitivity of the LOM protection.

#### 4.1 Consideration of the impact of various G59 revision options

Using the results in Tables 13 to 17 various G59 revision options can be considered and directly compared in terms of overall aggregated risk. For example, regarding the individual risk of electrocution the following calculations can be made:

- a) Revision 1: Changing ROCOF protection to setting option 3 and VS to setting option 7 and assuming that all AGU type generation requires NVD protection (CS3)
  - Without considering NVD protection  

$$IR_{Ea} = 1.66 \cdot 10^{-5} + 2.39 \cdot 10^{-5} = 4.05 \cdot 10^{-5}$$
  - with NVD on selected generators and all AGUs connected (CS2.1)  

$$IR_{Ea)NVD} = 1.12 \cdot 10^{-5} + 1.62 \cdot 10^{-5} = 2.74 \cdot 10^{-5}$$
  - with NVD on selected generators and all AGUs disconnected (CS2.2)  

$$IR_{Ea)NVD} = 0.794 \cdot 10^{-5} + 1.15 \cdot 10^{-5} = 1.944 \cdot 10^{-5}$$

- with NVD on all AGU generation and all AGUs connected (CS3)  
 $IR_{Ea)NVD} = 6.35 \cdot 10^{-6} + 9.17 \cdot 10^{-6} = 1.552 \cdot 10^{-5}$

- b) Revision 2: Removing both ROCOF and VS protections and relying on G59 voltage and frequency protection only (setting option 8)

- without NVD  
 $IR_{Eb)NVD} = 4.05 \cdot 10^{-5}$
- with NVD on selected generators and all AGUs connected (CS2.1)  
 $IR_{Eb)NVD} = 2.74 \cdot 10^{-5}$
- with NVD on selected generators and all AGUs disconnected (CS2.2)  
 $IR_{Eb)NVD} = 1.94 \cdot 10^{-5}$
- with NVD on all AGU generation and all AGUs connected (CS3)  
 $IR_{Eb)NVD} = 1.55 \cdot 10^{-5}$

- c) Revision 3: Applying ROCOF protection with setting option 9 to all DG and removing VS from service. This can be established directly from the results included in Table 16. Assuming that NVD protection is not present the risk in this case would be:

- $IR_{Ec)NVD} = 3.47 \cdot 10^{-5}$

This result can be compared directly with the existing LOM risk which is a combination of ROCOF (setting option 1) and VS (setting option 6). Based on values in Table 17 the existing risk is estimated as  $IR_E = 1.42 \cdot 10^{-5} + 2.39 \cdot 10^{-5} = 3.71 \cdot 10^{-5}$ . Those two figures provide a relative risk reduction factor that can be used when considering the change from existing VS/ROCOF solution to ROCOF (setting option 9):

- $IR_{SO9} = \frac{3.47 \cdot 10^{-5}}{3.71 \cdot 10^{-5}} = 0.9353$

This reduction factor can be combined with the calculated NVD case studies to estimate the final risk level as follows:

- with NVD on selected generators and all AGUs connected (CS2.1)  
 $IR_{Ec)NVD} = (0.948 \cdot 10^{-5} + 1.62 \cdot 10^{-5}) \times 0.9353 = 2.40 \cdot 10^{-5}$
- with NVD on selected generators and all AGUs disconnected (CS2.2)  
 $IR_{Ec)NVD} = (0.669 \cdot 10^{-5} + 1.15 \cdot 10^{-5}) \times 0.9353 = 1.70 \cdot 10^{-5}$
- with NVD on all AGU generation and all AGUs connected (CS3)  
 $IR_{Ec)NVD} = (5.32 \cdot 10^{-6} + 9.17 \cdot 10^{-6}) \times 0.9353 = 1.355 \cdot 10^{-5}$

## 4.2 Relative contribution to risk of various generation groups and scenarios

To provide additional guidance on the impact of out-of-phase reclosure, the individual percentage contributions to the overall number of out-of-phase incidents ( $N_{LOM,AR}$ ) have been established for the setting option 9 (all generation protected by ROCOF set to 0.4 Hz/s with 0 s delay), and presented in Table 19 (based on the detailed results included in Appendix E.2). As discussed earlier at the end of section 3.2.3, various generating technologies are affected by out-of-phase reclosure in different ways. For example, the groups which are particularly vulnerable to such events are those including synchronous generators, i.e. generation mixes 1, 4, 5, 6, 7, 10 and 11. Those mixes contribute 100% of all expected out-of-phase reclosures (calculated using the percentage values in the right hand side column in Table 19). Therefore, all identified out-of-phase reclosures pose high risk of damage to the generator and it would not be reasonable to lower the estimated risk values.

**Table 19. Contribution of individual generation mixes to the overall number of LOM incidents (individual figures averaged across all load profiles) – setting option 9 (without NVD) – CS4**

Islanding Scenario	Generation Mix ( $m$ )	$N_{LOM,AR(m)}$	$N_{LOM,AR(m)}[\%]$
3	1 (SM 100%)	0.00003	0.0500
	2 (IC 100%)	0.00000	0.0000
	3 (IM 100%)	0.00000	0.0000
	4 (SM 80%, IC 20%)	0.00000	0.0000
	5 (SM 50%, IC 50%)	0.00000	0.0000
	6 (SM 70%, IM 30%)	0.00215	3.1171
	7 (SM 30%, IM 70%)	0.00634	9.1795
	8 (IC 60%, IM 40%)	0.00000	0.0000
	9 (IC 20%, IM 80%)	0.00000	0.0000
	10 (SM 50%, IC 15%, IM 35%)	0.00000	0.0000
	11 (SM 25%, IC 20%, IM 55%)	0.00000	0.0000
4	1 (SM 100%)	0.00000	0.0000
	2 (IC 100%)	0.00000	0.0000
	3 (IM 100%)	0.00000	0.0000
	4 (SM 80%, IC 20%)	0.00000	0.0000
	5 (SM 50%, IC 50%)	0.00000	0.0000
	6 (SM 70%, IM 30%)	0.03533	51.1530
	7 (SM 30%, IM 70%)	0.02521	36.5004
	8 (IC 60%, IM 40%)	0.00000	0.0000
	9 (IC 20%, IM 80%)	0.00000	0.0000
	10 (SM 50%, IC 15%, IM 35%)	0.00000	0.0000
	11 (SM 25%, IC 20%, IM 55%)	0.00000	0.0000
Total:		0.06907	100.00

## 5 References

- [1] A. Dyško, D. Tzelepis, and C. Booth, 'Assessment of Increased Risks Imposed by a Relaxation of Loss-Of-Mains Protection Settings Applied to Generation Connected to the Electricity Network in Northern Ireland (WP1 and WP2)', University of Strathclyde, NIE/LOM/TR/2016-001, Mar. 2016.
- [2] A. Dyško, D. Tzelepis, and C. Booth, 'Assessment of Increased Risks Imposed by a Relaxation of Loss-Of-Mains Protection Settings Applied to Generation Connected to the Electricity Network in Northern Ireland (Phase 2 - WP4)', University of Strathclyde, NIE/LOM/TR/2016-003, Dec. 2016.
- [3] 'Health and Safety at Work etc. Act 1974'. [Online]. Available: <http://www.legislation.gov.uk/ukpga/1974/37/contents>. [Accessed: 21-Jun-2016].
- [4] O. A. Quiroga, J. Meléndez, and S. Herraiz, 'Fault causes analysis in feeders of power distribution networks', in *International Conference in Renewables Energies and Quality Power, ICREP*, 2011, vol. 11.
- [5] Bugdal, R., Dysko, A., Burt, G.M., and McDonald, J.R., 'Performance analysis of the ROCOF and vector shift methods using a dynamic protection modeling approach', presented at the 15th International Conference on Power System Protection, Bled, Slovenia, 2006, pp. 139–144.
- [6] A. Dyško, D. Tzelepis, and C. Booth, 'Assessment of Increased Risks Imposed by a Relaxation of Loss-Of-Mains Protection Settings Applied to Generation Connected to the Electricity Network in Northern Ireland (Phase 1 - WP3)', University of Strathclyde, NIE/LOM/TR/2016-002A, Aug. 2016.
- [7] Commission Regulation (EU) 2016/631, 'Establishing a network code on requirements for grid connection of generators', 14-Apr-2016. [Online]. Available: [http://eur-lex.europa.eu/legal-content/EN/TXT/?uri=OJ:JOL\\_2016\\_112\\_R\\_0001](http://eur-lex.europa.eu/legal-content/EN/TXT/?uri=OJ:JOL_2016_112_R_0001). [Accessed: 04-Jul-2016].
- [8] 'Marginal distribution', *Wikipedia, the free encyclopedia*, 02-Jun-2016. [Online]. Available: [https://en.wikipedia.org/w/index.php?title=Marginal\\_distribution&oldid=723297349](https://en.wikipedia.org/w/index.php?title=Marginal_distribution&oldid=723297349). [Accessed: 21-Jun-2016].
- [9] Distribution Code Review Panel G59 NVD Working Group, 'Embedded generation interface protection: Assessment of risks arising from relaxation in the application of neutral voltage displacement (NVD) interface protection'. Energy Networks Association, 31-Dec-2009.
- [10] A. Dyško, I. Abdulhadi, X. Li, and C. Booth, 'Assessment of Risks Resulting from the Adjustment of ROCOF Based Loss of Mains Protection Settings - Phase I', University of Strathclyde, NGC/LOM/TR/2013-001b, Jun. 2013.
- [11] A. Dyško, D. Tzelepis, and C. Booth, 'Assessment of Risks Resulting from the Adjustment of ROCOF Based Loss of Mains Protection Settings - Phase II', University of Strathclyde, ENA/LOM/TR/2015-001, Oct. 2015.
- [12] A. Dyško, 'Proposal - Assessment of Increased Risks Imposed by a Relaxation of Loss-Of-Mains Protection Settings Applied to Generation Connected to the Electricity Network in Northern Ireland (Annexe – Impact of NVD protection)', University of Strathclyde, NIE/LOM/RP/2017-001A, Feb. 2017.

## Appendix A: NDZ Assessment results

### A.1. Combined NDZ results (with ROCOF, VS and G59 protection enabled)

Note: Values denoted by \* and # indicate that voltage or frequency protection operated first, resulting in a narrower NDZ than the ROCOF or VS protection (considering 30s as a maximum operation time).

**Table 20: ROCOF and VS NDZ results for Generation Mix 1 (SM 100%)**

Setting Option	Protection type and settings	NDZ <sub>PI</sub>	NDZ <sub>PE</sub>	NDZ <sub>QI</sub>	NDZ <sub>QE</sub>
1	ROCOF (0.4 Hz/s – no time delay)	1.208*	0.066	0.551	4.754*
2	ROCOF (2.0 Hz/s – 200 ms time delay)	1.208*	1.145*	4.204*	4.754*
3	ROCOF (1.5 Hz/s – 300 ms time delay)	1.208*	1.145*	4.204*	4.754*
4	ROCOF (1.5 Hz/s – 500 ms time delay)	1.208*	1.145*	4.204*	4.754*
5	ROCOF (1.0 Hz/s – 800 ms time delay)	1.208*	0.948	3.799	4.754*
6	VS (6°)	1.208*	1.145*	4.204*	4.754*
7	VS (12°)	1.208*	1.145*	4.204*	4.754*
8	G59 (UV/OV/UF/OF) only	1.208	1.145	4.204	4.754

**Table 21: ROCOF and VS NDZ results for Generation Mix 2 (IC 100%)**

Setting Option	Protection type and settings	NDZ <sub>PI</sub>	NDZ <sub>PE</sub>	NDZ <sub>QI</sub>	NDZ <sub>QE</sub>
1	ROCOF (0.4 Hz/s – no time delay)	0	0	0	0
2	ROCOF (2.0 Hz/s – 200 ms time delay)	0*	0*	0*	0*
3	ROCOF (1.5 Hz/s – 300 ms time delay)	0*	0*	0*	0*
4	ROCOF (1.5 Hz/s – 500 ms time delay)	0*	0*	0*	0*
5	ROCOF (1.0 Hz/s – 800 ms time delay)	0*	0*	0*	0*
6	VS (6°)	0*	0*	0*	0*
7	VS (12°)	0*	0*	0*	0*
8	G59 (UV/OV/UF/OF) only	0	0	0	0

**Table 22: ROCOF and VS NDZ results for Generation Mix 3 (IM 100%)**

Setting Option	Protection type and settings	NDZ <sub>PI</sub>	NDZ <sub>PE</sub>	NDZ <sub>QI</sub>	NDZ <sub>QE</sub>
1	ROCOF (0.4 Hz/s – no time delay)	0	0	0	0
2	ROCOF (2.0 Hz/s – 200 ms time delay)	0	0	0	0
3	ROCOF (1.5 Hz/s – 300 ms time delay)	0	0	0	0
4	ROCOF (1.5 Hz/s – 500 ms time delay)	0	0	0	0
5	ROCOF (1.0 Hz/s – 800 ms time delay)	0	0	0	0
6	VS (6°)	0*	0*	0*	0*
7	VS (12°)	0*	0*	0*	0*
8	G59 (UV/OV/UF/OF) only	0	0	0	0

**Table 23: ROCOF and VS NDZ results for Generation Mix 4 (SM 80%, IC 20%)**

<b>Setting Option</b>	<b>Protection type and settings</b>	<b>NDZ<sub>PI</sub></b>	<b>NDZ<sub>PE</sub></b>	<b>NDZ<sub>QI</sub></b>	<b>NDZ<sub>QE</sub></b>
1	ROCOF (0.4 Hz/s – no time delay)	0	0	0	0
2	ROCOF (2.0 Hz/s – 200 ms time delay)	0	0	0	0
3	ROCOF (1.5 Hz/s – 300 ms time delay)	0	0	0	0
4	ROCOF (1.5 Hz/s – 500 ms time delay)	0	0	0	0
5	ROCOF (1.0 Hz/s – 800 ms time delay)	0	0	0	0
6	VS (6°)	0	0	0	0
7	VS (12°)	0	0	0	0
8	G59 (UV/OV/UF/OF) only	0	0	0	0

**Table 24: ROCOF and VS NDZ results for Generation Mix 5 (SM 50%, IC 50%)**

<b>Setting Option</b>	<b>Protection type and settings</b>	<b>NDZ<sub>PI</sub></b>	<b>NDZ<sub>PE</sub></b>	<b>NDZ<sub>QI</sub></b>	<b>NDZ<sub>QE</sub></b>
1	ROCOF (0.4 Hz/s – no time delay)	0	0	0	0
2	ROCOF (2.0 Hz/s – 200 ms time delay)	0	0	0	0
3	ROCOF (1.5 Hz/s – 300 ms time delay)	0	0	0	0
4	ROCOF (1.5 Hz/s – 500 ms time delay)	0	0	0	0
5	ROCOF (1.0 Hz/s – 800 ms time delay)	0	0	0	0
6	VS (6°)	0	0	0	0
7	VS (12°)	0	0	0	0
8	G59 (UV/OV/UF/OF) only	0	0	0	0

**Table 25: ROCOF and VS NDZ results for Generation Mix 6 (SM 70%, IM 30%)**

<b>Setting Option</b>	<b>Protection type and settings</b>	<b>NDZ<sub>PI</sub></b>	<b>NDZ<sub>PE</sub></b>	<b>NDZ<sub>QI</sub></b>	<b>NDZ<sub>QE</sub></b>
1	ROCOF (0.4 Hz/s – no time delay)	1.71*	2.797	6.507	4.271*
2	ROCOF (2.0 Hz/s – 200 ms time delay)	1.71*	3.777*	11.631*	4.271*
3	ROCOF (1.5 Hz/s – 300 ms time delay)	1.71*	3.777*	11.631*	4.271*
4	ROCOF (1.5 Hz/s – 500 ms time delay)	1.71*	3.777*	11.631*	4.271*
5	ROCOF (1.0 Hz/s – 800 ms time delay)	1.71*	3.777*	11.631*	4.271*
6	VS (6°)	1.71*	3.777*	11.631*	4.271*
7	VS (12°)	1.71*	3.777*	11.631*	4.271*
8	G59 (UV/OV/UF/OF) only	1.71	3.777	11.631	4.271

**Table 26: ROCOF and VS NDZ results for Generation Mix 7 (SM 30%, IM 70%)**

<b>Setting Option</b>	<b>Protection type and settings</b>	<b>NDZ<sub>PI</sub></b>	<b>NDZ<sub>PE</sub></b>	<b>NDZ<sub>QI</sub></b>	<b>NDZ<sub>QE</sub></b>
1	ROCOF (0.4 Hz/s – no time delay)	3.777*	6.261	7.63*	4.567*
2	ROCOF (2.0 Hz/s – 200 ms time delay)	3.777*	6.261*	7.63*	4.567*
3	ROCOF (1.5 Hz/s – 300 ms time delay)	3.777*	6.261*	7.63*	4.567*
4	ROCOF (1.5 Hz/s – 500 ms time delay)	3.777*	6.261*	7.63*	4.567*
5	ROCOF (1.0 Hz/s – 800 ms time delay)	3.777*	6.261*	7.63*	4.567*
6	VS (6°)	3.777*	6.261*	7.63*	4.567*
7	VS (12°)	3.777*	6.261*	7.63*	4.567*
8	G59 (UV/OV/UF/OF) only	3.777	6.261	7.63	4.567

**Table 27: ROCOF and VS NDZ results for Generation Mix 8 (IC 60%, IM 40%)**

<b>Setting Option</b>	<b>Protection type and settings</b>	<b>NDZ<sub>PI</sub></b>	<b>NDZ<sub>PE</sub></b>	<b>NDZ<sub>QI</sub></b>	<b>NDZ<sub>QE</sub></b>
1	ROCOF (0.4 Hz/s – no time delay)	0	0	0	0
2	ROCOF (2.0 Hz/s – 200 ms time delay)	0	0	0	0
3	ROCOF (1.5 Hz/s – 300 ms time delay)	0	0	0	0
4	ROCOF (1.5 Hz/s – 500 ms time delay)	0	0	0	0
5	ROCOF (1.0 Hz/s – 800 ms time delay)	0	0	0	0
6	VS (6°)	0	0	0	0
7	VS (12°)	0	0	0	0
8	G59 (UV/OV/UF/OF) only	0	0	0	0

**Table 28: ROCOF and VS NDZ results for Generation Mix 9 (IC 20%, IM 80%)**

<b>Setting Option</b>	<b>Protection type and settings</b>	<b>NDZ<sub>PI</sub></b>	<b>NDZ<sub>PE</sub></b>	<b>NDZ<sub>QI</sub></b>	<b>NDZ<sub>QE</sub></b>
1	ROCOF (0.4 Hz/s – no time delay)	0	0	0	0
2	ROCOF (2.0 Hz/s – 200 ms time delay)	0*	0*	0*	0*
3	ROCOF (1.5 Hz/s – 300 ms time delay)	0*	0*	0*	0*
4	ROCOF (1.5 Hz/s – 500 ms time delay)	0*	0*	0*	0*
5	ROCOF (1.0 Hz/s – 800 ms time delay)	0*	0*	0*	0*
6	VS (6°)	0*	0*	0*	0*
7	VS (12°)	0*	0*	0*	0*
8	G59 (UV/OV/UF/OF) only	0*	0*	0*	0*

**Table 29: ROCOF and VS NDZ results for Generation Mix 10 (SM 50%, IC 15%, IM 35%)**

<b>Setting Option</b>	<b>Protection type and settings</b>	<b>NDZ<sub>PI</sub></b>	<b>NDZ<sub>PE</sub></b>	<b>NDZ<sub>QI</sub></b>	<b>NDZ<sub>QE</sub></b>
1	ROCOF (0.4 Hz/s – no time delay)	0	0	0	0
2	ROCOF (2.0 Hz/s – 200 ms time delay)	0	0	0	0
3	ROCOF (1.5 Hz/s – 300 ms time delay)	0	0	0	0
4	ROCOF (1.5 Hz/s – 500 ms time delay)	0	0	0	0
5	ROCOF (1.0 Hz/s – 800 ms time delay)	0	0	0	0
6	VS (6°)	0	0	0	0
7	VS (12°)	0	0	0	0
8	G59 (UV/OV/UF/OF) only	0	0	0	0

**Table 30: ROCOF and VS NDZ results for Generation Mix 11 (SM 25%, IC 20%, IM 55%)**

<b>Setting Option</b>	<b>Protection type and settings</b>	<b>NDZ<sub>PI</sub></b>	<b>NDZ<sub>PE</sub></b>	<b>NDZ<sub>QI</sub></b>	<b>NDZ<sub>QE</sub></b>
1	ROCOF (0.4 Hz/s – no time delay)	0	0	0	0
2	ROCOF (2.0 Hz/s – 200 ms time delay)	0	0	0	0
3	ROCOF (1.5 Hz/s – 300 ms time delay)	0	0	0	0
4	ROCOF (1.5 Hz/s – 500 ms time delay)	0	0	0	0
5	ROCOF (1.0 Hz/s – 800 ms time delay)	0	0	0	0
6	VS (6°)	0	0	0	0
7	VS (12°)	0	0	0	0
8	G59 (UV/OV/UF/OF) only	0	0	0	0

## A.2. NDZ results for individual LOM protection elements

**Table 31: NDZ results for Generation Mix 1 (SM 100%)**

	<b>NDZ<sub>PI</sub></b>	<b>NDZ<sub>PE</sub></b>	<b>NDZ<sub>QI</sub></b>	<b>NDZ<sub>QE</sub></b>
ROCOF (0.4 Hz/s – no time delay)	1.992	0.066	0.551	5.163
ROCOF (2.0 Hz/s – 200 ms time delay)	10.804	2.419	7.84	24.638
ROCOF (1.5 Hz/s – 300 ms time delay)	7.868	1.537	5.823	31.372
ROCOF (1.5 Hz/s – 500 ms time delay)	8.358	1.537	5.823	36.457
ROCOF (1.0 Hz/s – 800 ms time delay)	5.91	0.948	3.799	22.962
VS (6°)	42.988	>50	>50	>50
VS (12°)	>50	>50	>50	>50
UV/OV	>50	>50	>50	>50
UF/OF	1.208	1.145	4.204	4.754

**Table 32: NDZ results for Generation Mix 2 (IC 100%)**

	<b>NDZ<sub>PI</sub></b>	<b>NDZ<sub>PE</sub></b>	<b>NDZ<sub>QI</sub></b>	<b>NDZ<sub>QE</sub></b>
ROCOF (0.4 Hz/s – no time delay)	0	0	0	0
ROCOF (2.0 Hz/s – 200 ms time delay)	0.065	0.716	0.683	0.096
ROCOF (1.5 Hz/s – 300 ms time delay)	0.065	0.716	0.683	0.096
ROCOF (1.5 Hz/s – 500 ms time delay)	0.065	0.716	0.683	0.096
ROCOF (1.0 Hz/s – 800 ms time delay)	0.065	0.716	0.683	0.096
VS (6°)	>50	43.428	>50	12.628
VS (12°)	>50	43.428	>50	12.628
UV/OV	0	0	0	0
UF/OF	0.065	0.716	0.683	0.096

**Table 33: NDZ results for Generation Mix 3 (IM 100%)**

	<b>NDZ<sub>PI</sub></b>	<b>NDZ<sub>PE</sub></b>	<b>NDZ<sub>QI</sub></b>	<b>NDZ<sub>QE</sub></b>
ROCOF (0.4 Hz/s – no time delay)	0	0	0	0
ROCOF (2.0 Hz/s – 200 ms time delay)	0	0	0	0
ROCOF (1.5 Hz/s – 300 ms time delay)	0	0	0	0
ROCOF (1.5 Hz/s – 500 ms time delay)	0	0	0	0
ROCOF (1.0 Hz/s – 800 ms time delay)	0	0	0	0
VS (6°)	0.142	0.054	0.092	0.211
VS (12°)	0.24	0.543	0.596	0.312
UV/OV	0	0	0	0
UF/OF	0	0	0	0

**Table 34: NDZ results for Generation Mix 4 (SM 80%, IC 20%)**

	<b>NDZ<sub>PI</sub></b>	<b>NDZ<sub>PE</sub></b>	<b>NDZ<sub>QI</sub></b>	<b>NDZ<sub>QE</sub></b>
ROCOF (0.4 Hz/s – no time delay)	0	0	0	0
ROCOF (2.0 Hz/s – 200 ms time delay)	0	0	0	0
ROCOF (1.5 Hz/s – 300 ms time delay)	0	0	0	0
ROCOF (1.5 Hz/s – 500 ms time delay)	0	0	0	0
ROCOF (1.0 Hz/s – 800 ms time delay)	0	0	0	0
VS (6°)	0	0	0	0
VS (12°)	0	0	0	0
UV/OV	7.414	27.182	25.227	>50
UF/OF	0	0	0	0

**Table 35: NDZ results for Generation Mix 5 (SM 50%, IC 50%)**

	<b>NDZ<sub>PI</sub></b>	<b>NDZ<sub>PE</sub></b>	<b>NDZ<sub>QI</sub></b>	<b>NDZ<sub>QE</sub></b>
ROCOF (0.4 Hz/s – no time delay)	0	0	0	0
ROCOF (2.0 Hz/s – 200 ms time delay)	0	0	0	0
ROCOF (1.5 Hz/s – 300 ms time delay)	0	0	0	0
ROCOF (1.5 Hz/s – 500 ms time delay)	0	0	0	0
ROCOF (1.0 Hz/s – 800 ms time delay)	0	0	0	0
VS (6°)	0	0	0	0
VS (12°)	0	0	0	0
UV/OV	0	0	0	0
UF/OF	0	0	0	0

**Table 36: NDZ results for Generation Mix 6 (SM 70%, IM 30%)**

	<b>NDZ<sub>PI</sub></b>	<b>NDZ<sub>PE</sub></b>	<b>NDZ<sub>QI</sub></b>	<b>NDZ<sub>QE</sub></b>
ROCOF (0.4 Hz/s – no time delay)	3.326	2.797	6.507	5.574
ROCOF (2.0 Hz/s – 200 ms time delay)	17.744	18.503	39.245	24.027
ROCOF (1.5 Hz/s – 300 ms time delay)	13.838	14.572	34.294	25.806
ROCOF (1.5 Hz/s – 500 ms time delay)	14.815	14.572	40.888	32.958
ROCOF (1.0 Hz/s – 800 ms time delay)	10.907	9.662	29.313	34.756
VS (6°)	>50	47.09	>50	>50
VS (12°)	>50	>50	>50	>50
UV/OV	25.547	>50	>50	32.958
UF/OF	1.71	3.777	11.631	4.271

**Table 37: NDZ results for Generation Mix 7 (SM 30%, IM 70%)**

	<b>NDZ<sub>PI</sub></b>	<b>NDZ<sub>PE</sub></b>	<b>NDZ<sub>QI</sub></b>	<b>NDZ<sub>QE</sub></b>
ROCOF (0.4 Hz/s – no time delay)	6.467	6.261	7.63	5.986
ROCOF (2.0 Hz/s – 200 ms time delay)	27.435	37.248	35.104	16.945
ROCOF (1.5 Hz/s – 300 ms time delay)	16.72	29.359	26.049	15.987
ROCOF (1.5 Hz/s – 500 ms time delay)	16.72	31.33	29.683	17.905
ROCOF (1.0 Hz/s – 800 ms time delay)	16.72	21.483	24.226	16.945
VS (6°)	>50	37.248	>50	>50
VS (12°)	>50	>50	>50	>50
UV/OV	18.67	25.42	36.902	14.073
UF/OF	3.777	6.261	7.63	4.567

**Table 38: NDZ results for Generation Mix 8 (IC 60%, IM 40%)**

	<b>NDZ<sub>PI</sub></b>	<b>NDZ<sub>PE</sub></b>	<b>NDZ<sub>QI</sub></b>	<b>NDZ<sub>QE</sub></b>
ROCOF (0.4 Hz/s – no time delay)	0	0	0	0
ROCOF (2.0 Hz/s – 200 ms time delay)	0	0	0	0
ROCOF (1.5 Hz/s – 300 ms time delay)	0	0	0	0
ROCOF (1.5 Hz/s – 500 ms time delay)	0	0	0	0
ROCOF (1.0 Hz/s – 800 ms time delay)	0	0	0	0
VS (6°)	0	0	0	0
VS (12°)	0.839	0.036	0.624	0.032
UV/OV	0	0	0	0
UF/OF	0	0	0	0

**Table 39: NDZ results for Generation Mix 9 (IC 20%, IM 80%)**

	<b>NDZ<sub>PI</sub></b>	<b>NDZ<sub>PE</sub></b>	<b>NDZ<sub>QI</sub></b>	<b>NDZ<sub>QE</sub></b>
ROCOF (0.4 Hz/s – no time delay)	0	0	0	0
ROCOF (2.0 Hz/s – 200 ms time delay)	>50	37.341	27.628	14.174
ROCOF (1.5 Hz/s – 300 ms time delay)	>50	45.25	19.828	14.174
ROCOF (1.5 Hz/s – 500 ms time delay)	>50	45.25	23.738	14.174
ROCOF (1.0 Hz/s – 800 ms time delay)	48.687	45.25	23.738	6.553
VS (6°)	>50	>50	>50	24.444
VS (12°)	>50	>50	>50	>50
UV/OV	0	0	0	0
UF/OF	0	0	0	0

**Table 40: NDZ results for Generation Mix 10 (SM 50%, IC 15%, IM 35%)**

	<b>NDZ<sub>PI</sub></b>	<b>NDZ<sub>PE</sub></b>	<b>NDZ<sub>QI</sub></b>	<b>NDZ<sub>QE</sub></b>
ROCOF (0.4 Hz/s – no time delay)	0	0	0	0
ROCOF (2.0 Hz/s – 200 ms time delay)	0	0	0	0
ROCOF (1.5 Hz/s – 300 ms time delay)	0	0	0	0
ROCOF (1.5 Hz/s – 500 ms time delay)	0	0	0	0
ROCOF (1.0 Hz/s – 800 ms time delay)	0	0	0	0
VS (6°)	0	0	0	0
VS (12°)	0	0	0	0
UV/OV	0	0	0	0
UF/OF	0	0	0	0

**Table 41: NDZ results for Generation Mix 11 (SM 25%, IC 20%, IM 55%)**

	<b>NDZ<sub>PI</sub></b>	<b>NDZ<sub>PE</sub></b>	<b>NDZ<sub>QI</sub></b>	<b>NDZ<sub>QE</sub></b>
ROCOF (0.4 Hz/s – no time delay)	0	0	0	0
ROCOF (2.0 Hz/s – 200 ms time delay)	0	0	0	0
ROCOF (1.5 Hz/s – 300 ms time delay)	0	0	0	0
ROCOF (1.5 Hz/s – 500 ms time delay)	0	0	0	0
ROCOF (1.0 Hz/s – 800 ms time delay)	0	0	0	0
VS (6°)	0	0	0	0
VS (12°)	0	0	0	0
UV/OV	0	0	0	0
UF/OF	0	0	0	0

## Appendix B: Full record of risk assessment results (Case Study 2.1)

### B.1. Summary Results

**Table 42. LOM risk assessment results for islanding scenario 3 (loss of supply to primary substation)**

Load Profile	Setting Option	$T_{NDZavr,s1}$ [min]	$N_{LOM,1DGG,s1}$	$P_{LOM,1DGG,s1}$	$N_{LOM,AR,s1}$	$P_{LOM,E,s1}$	$N_{LOM,E,s1}$
LP01	1	26.53	1.87E-04	1.78E-10	1.39E-02	1.32E-08	5.65E-02
	2	28.66	2.01E-04	1.91E-10	1.48E-02	1.41E-08	6.10E-02
	3	28.66	2.01E-04	1.91E-10	1.48E-02	1.41E-08	6.10E-02
	4	28.66	2.01E-04	1.91E-10	1.48E-02	1.41E-08	6.10E-02
	5	28.58	2.00E-04	1.90E-10	1.48E-02	1.41E-08	6.08E-02
	6	16.23	1.04E-04	9.86E-11	2.15E-02	2.04E-08	8.85E-02
	7	16.23	1.04E-04	9.86E-11	2.15E-02	2.04E-08	8.85E-02
	8	19.50	1.29E-04	1.23E-10	3.63E-02	3.45E-08	1.50E-01
LP02	1	18.56	2.50E-05	2.38E-11	1.85E-03	1.76E-09	1.06E-02
	2	19.36	7.14E-05	6.79E-11	5.28E-03	5.02E-09	2.66E-02
	3	19.36	7.14E-05	6.79E-11	5.28E-03	5.02E-09	2.66E-02
	4	19.36	7.14E-05	6.79E-11	5.28E-03	5.02E-09	2.66E-02
	5	19.27	7.13E-05	6.78E-11	5.27E-03	5.02E-09	2.65E-02
	6	11.17	3.67E-05	3.49E-11	7.60E-03	7.23E-09	3.84E-02
	7	11.17	3.67E-05	3.49E-11	7.60E-03	7.23E-09	3.84E-02
	8	13.32	4.59E-05	4.36E-11	1.29E-02	1.23E-08	6.50E-02
LP03	1	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
LP04	1	29.25	1.07E-05	1.02E-11	7.89E-04	7.51E-10	2.58E-03
	2	39.63	1.21E-05	1.15E-11	8.98E-04	8.54E-10	3.10E-03
	3	39.63	1.21E-05	1.15E-11	8.98E-04	8.54E-10	3.10E-03
	4	39.63	1.21E-05	1.15E-11	8.98E-04	8.54E-10	3.10E-03
	5	39.63	1.21E-05	1.15E-11	8.98E-04	8.54E-10	3.10E-03
	6	20.35	6.23E-06	5.93E-12	1.29E-03	1.23E-09	4.46E-03
	7	20.35	6.23E-06	5.93E-12	1.29E-03	1.23E-09	4.46E-03
	8	25.42	7.79E-06	7.41E-12	2.19E-03	2.08E-09	7.56E-03
LP05	1	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 43. LOM risk assessment results for islanding scenario 4 (loss of individual 11kV or 6.6kV feeder)**

<b>Load Profile</b>	<b>Setting Option</b>	$T_{NDZavr,s2}$ [min]	$N_{LOM,1DGG,s2}$	$P_{LOM,1DGG,s2}$	$N_{LOM,AR,s2}$	$P_{LOM,E,s2}$	$N_{LOM,E,s2}$
LP06	1	13.81	2.50E-05	2.38E-11	1.85E-03	1.76E-09	1.51E-02
	2	22.37	3.61E-05	3.44E-11	2.67E-03	2.54E-09	2.26E-02
	3	22.37	3.61E-05	3.44E-11	2.67E-03	2.54E-09	2.26E-02
	4	22.37	3.61E-05	3.44E-11	2.67E-03	2.54E-09	2.26E-02
	5	21.95	3.60E-05	3.42E-11	2.66E-03	2.53E-09	2.23E-02
	6	12.65	1.87E-05	1.78E-11	3.87E-03	3.69E-09	3.30E-02
	7	12.65	1.87E-05	1.78E-11	3.87E-03	3.69E-09	3.30E-02
	8	15.21	2.33E-05	2.22E-11	6.55E-03	6.23E-09	5.55E-02
LP07	1	16.44	4.18E-05	3.97E-11	3.09E-03	2.94E-09	1.67E-02
	2	19.32	5.59E-05	5.32E-11	4.13E-03	3.93E-09	2.33E-02
	3	19.32	5.59E-05	5.32E-11	4.13E-03	3.93E-09	2.33E-02
	4	19.32	5.59E-05	5.32E-11	4.13E-03	3.93E-09	2.33E-02
	5	19.32	5.59E-05	5.32E-11	4.13E-03	3.93E-09	2.33E-02
	6	9.92	2.87E-05	2.73E-11	5.94E-03	5.65E-09	3.35E-02
	7	9.92	2.87E-05	2.73E-11	5.94E-03	5.65E-09	3.35E-02
	8	12.40	3.58E-05	3.41E-11	1.01E-02	9.58E-09	5.68E-02
LP08	1	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.08E-07
	2	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.08E-07
	3	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.08E-07
	4	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.08E-07
	5	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.08E-07
	6	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.56E-07
	7	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.56E-07
	8	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.64E-07
LP09	1	81.09	9.82E-04	9.34E-10	7.26E-02	6.91E-08	4.09E-01
	2	117.44	1.13E-03	1.07E-09	8.33E-02	7.92E-08	4.81E-01
	3	117.44	1.13E-03	1.07E-09	8.33E-02	7.92E-08	4.81E-01
	4	117.44	1.13E-03	1.07E-09	8.33E-02	7.92E-08	4.81E-01
	5	114.50	1.12E-03	1.06E-09	8.25E-02	7.85E-08	4.76E-01
	6	67.07	5.82E-04	5.53E-10	1.20E-01	1.15E-07	6.96E-01
	7	67.07	5.82E-04	5.53E-10	1.20E-01	1.15E-07	6.96E-01
	8	80.33	7.25E-04	6.90E-10	2.04E-01	1.94E-07	1.18E+00
LP10	1	11.14	4.02E-06	3.82E-12	2.97E-04	2.83E-10	2.81E-03
	2	19.33	4.04E-06	3.85E-12	2.99E-04	2.85E-10	5.37E-03
	3	19.33	4.04E-06	3.85E-12	2.99E-04	2.85E-10	5.37E-03
	4	19.33	4.04E-06	3.85E-12	2.99E-04	2.85E-10	5.37E-03
	5	19.18	4.04E-06	3.85E-12	2.99E-04	2.85E-10	4.74E-03
	6	11.55	2.08E-06	1.98E-12	4.31E-04	4.10E-10	9.42E-03
	7	11.55	2.08E-06	1.98E-12	4.31E-04	4.10E-10	9.42E-03
	8	13.60	2.60E-06	2.47E-12	7.30E-04	6.95E-10	1.48E-02

**Table 44. Summary LOM risk assessment results – based on maximum load profile figures**

LOM Scenario	Setting Option	$T_{NDZavr}$ [min]	$N_{LOM,1DGG}$	$P_{LOM,1DGG}$	$N_{LOM,AR}$	$P_{LOM,E}$	$N_{LOM,E}$
S3	1	29.2	1.87E-04	1.78E-10	1.39E-02	1.32E-08	5.65E-02
	2	39.6	2.01E-04	1.91E-10	1.48E-02	1.41E-08	6.10E-02
	3	39.6	2.01E-04	1.91E-10	1.48E-02	1.41E-08	6.10E-02
	4	39.6	2.01E-04	1.91E-10	1.48E-02	1.41E-08	6.10E-02
	5	39.6	2.00E-04	1.90E-10	1.48E-02	1.41E-08	6.08E-02
	6	20.3	1.04E-04	9.86E-11	2.15E-02	2.04E-08	8.85E-02
	7	20.3	1.04E-04	9.86E-11	2.15E-02	2.04E-08	8.85E-02
	8	25.4	1.29E-04	1.23E-10	3.63E-02	3.45E-08	1.50E-01
S4	1	81.09	9.82E-04	9.34E-10	7.26E-02	6.91E-08	4.09E-01
	2	117.44	1.13E-03	1.07E-09	8.33E-02	7.92E-08	4.81E-01
	3	117.44	1.13E-03	1.07E-09	8.33E-02	7.92E-08	4.81E-01
	4	117.44	1.13E-03	1.07E-09	8.33E-02	7.92E-08	4.81E-01
	5	114.50	1.12E-03	1.06E-09	8.25E-02	7.85E-08	4.76E-01
	6	67.07	5.82E-04	5.53E-10	1.20E-01	1.15E-07	6.96E-01
	7	67.07	5.82E-04	5.53E-10	1.20E-01	1.15E-07	6.96E-01
	8	80.33	7.25E-04	6.90E-10	2.04E-01	1.94E-07	1.18E+00
Combined S3 & S4	1	55.17	5.85E-04	5.56E-10	8.65E-02	8.23E-08	4.65E-01
	2	78.54	6.63E-04	6.31E-10	9.81E-02	9.34E-08	5.42E-01
	3	78.54	6.63E-04	6.31E-10	9.81E-02	9.34E-08	5.42E-01
	4	78.54	6.63E-04	6.31E-10	9.81E-02	9.34E-08	5.42E-01
	5	77.06	6.58E-04	6.26E-10	9.73E-02	9.26E-08	5.36E-01
	6	43.71	3.43E-04	3.26E-10	1.42E-01	1.35E-07	7.85E-01
	7	43.71	3.43E-04	3.26E-10	1.42E-01	1.35E-07	7.85E-01
	8	52.88	4.27E-04	4.06E-10	2.40E-01	2.28E-07	1.33E+00

**Table 45. Summary LOM risk assessment results – based on average load profile figures**

LOM Scenario	Setting Option	$T_{NDZavr}$ [min]	$N_{LOM,1DGG}$	$P_{LOM,1DGG}$	$N_{LOM,AR}$	$P_{LOM,E}$	$N_{LOM,E}$
S3	1	14.87	4.46E-05	4.24E-11	3.30E-03	3.14E-09	1.39E-02
	2	17.53	5.68E-05	5.41E-11	4.20E-03	4.00E-09	1.81E-02
	3	17.53	5.68E-05	5.41E-11	4.20E-03	4.00E-09	1.81E-02
	4	17.53	5.68E-05	5.41E-11	4.20E-03	4.00E-09	1.81E-02
	5	17.49	5.67E-05	5.40E-11	4.20E-03	3.99E-09	1.81E-02
	6	9.55	2.93E-05	2.79E-11	6.07E-03	5.77E-09	2.63E-02
	7	9.55	2.93E-05	2.79E-11	6.07E-03	5.77E-09	2.63E-02
	8	11.65	3.66E-05	3.48E-11	1.03E-02	9.77E-09	4.44E-02
S4	1	24.50	2.11E-04	2.00E-10	1.56E-02	1.48E-08	8.86E-02
	2	35.69	2.44E-04	2.32E-10	1.81E-02	1.72E-08	1.06E-01
	3	35.69	2.44E-04	2.32E-10	1.81E-02	1.72E-08	1.06E-01
	4	35.69	2.44E-04	2.32E-10	1.81E-02	1.72E-08	1.06E-01
	5	34.99	2.42E-04	2.30E-10	1.79E-02	1.70E-08	1.05E-01
	6	20.24	1.26E-04	1.20E-10	2.61E-02	2.49E-08	1.54E-01
	7	20.24	1.26E-04	1.20E-10	2.61E-02	2.49E-08	1.54E-01
	8	24.31	1.57E-04	1.50E-10	4.42E-02	4.21E-08	2.61E-01
Combined S3 & S4	1	19.68	1.28E-04	1.21E-10	1.89E-02	1.80E-08	1.03E-01
	2	26.61	1.51E-04	1.43E-10	2.23E-02	2.12E-08	1.25E-01
	3	26.61	1.51E-04	1.43E-10	2.23E-02	2.12E-08	1.25E-01
	4	26.61	1.51E-04	1.43E-10	2.23E-02	2.12E-08	1.25E-01
	5	26.24	1.49E-04	1.42E-10	2.21E-02	2.10E-08	1.23E-01
	6	14.89	7.78E-05	7.40E-11	3.22E-02	3.06E-08	1.81E-01
	7	14.89	7.78E-05	7.40E-11	3.22E-02	3.06E-08	1.81E-01
	8	17.98	9.69E-05	9.22E-11	5.45E-02	5.18E-08	3.05E-01

## B.2. Detailed results for different generation mixes and load profiles

**Table 46. LOM risk assessment results (islanding scenario 3, load profile LP01)**

Generation Mix ( <i>m</i> )	Setting Option	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
1	1	54.91	6.17E-06	5.87E-12	5.70E-05	5.42E-11	5.08E-04
	2	57.29	2.36E-05	2.24E-11	2.18E-04	2.07E-10	1.48E-03
	3	57.29	2.36E-05	2.24E-11	2.18E-04	2.07E-10	1.48E-03
	4	57.29	2.36E-05	2.24E-11	2.18E-04	2.07E-10	1.48E-03
	5	56.67	2.06E-05	1.96E-11	1.90E-04	1.81E-10	1.22E-03
	6	57.29	2.36E-05	2.24E-11	4.42E-04	4.20E-10	3.00E-03
	7	57.29	2.36E-05	2.24E-11	4.42E-04	4.20E-10	3.00E-03
	8	57.29	2.36E-05	2.24E-11	6.60E-04	6.27E-10	4.48E-03
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	86.42	5.07E-04	4.82E-10	3.33E-03	3.17E-09	1.52E-02
	2	106.98	6.33E-04	6.02E-10	4.15E-03	3.95E-09	1.87E-02
	3	106.98	6.33E-04	6.02E-10	4.15E-03	3.95E-09	1.87E-02
	4	106.98	6.33E-04	6.02E-10	4.15E-03	3.95E-09	1.87E-02
	5	106.98	6.33E-04	6.02E-10	4.15E-03	3.95E-09	1.87E-02
	6	106.98	6.33E-04	6.02E-10	5.97E-03	5.68E-09	2.69E-02
	7	106.98	6.33E-04	6.02E-10	5.97E-03	5.68E-09	2.69E-02
	8	106.98	6.33E-04	6.02E-10	1.01E-02	9.63E-09	4.56E-02

<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	309.25	3.64E-03	3.47E-09	1.05E-02	9.96E-09	4.08E-02
	2	309.25	3.64E-03	3.47E-09	1.05E-02	9.96E-09	4.08E-02
	3	309.25	3.64E-03	3.47E-09	1.05E-02	9.96E-09	4.08E-02
	4	309.25	3.64E-03	3.47E-09	1.05E-02	9.96E-09	4.08E-02
	5	309.25	3.64E-03	3.47E-09	1.05E-02	9.96E-09	4.08E-02
	6	309.25	3.64E-03	3.47E-09	1.50E-02	1.43E-08	5.87E-02
	7	309.25	3.64E-03	3.47E-09	1.50E-02	1.43E-08	5.87E-02
	8	309.25	3.64E-03	3.47E-09	2.55E-02	2.43E-08	9.95E-02
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 47. LOM risk assessment results (islanding scenario 3, load profile LP02)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	1	52.00	1.35E-22	1.29E-28	1.25E-21	1.19E-27	9.57E-06
	2	46.20	3.01E-06	2.87E-12	2.78E-05	2.65E-11	3.65E-04
	3	46.20	3.01E-06	2.87E-12	2.78E-05	2.65E-11	3.65E-04
	4	46.20	3.01E-06	2.87E-12	2.78E-05	2.65E-11	3.65E-04
	5	45.45	2.09E-06	1.98E-12	1.93E-05	1.83E-11	2.57E-04
	6	46.20	3.01E-06	2.87E-12	5.65E-05	5.38E-11	7.42E-04
	7	46.20	3.01E-06	2.87E-12	5.65E-05	5.38E-11	7.42E-04
	8	46.20	3.01E-06	2.87E-12	8.43E-05	8.02E-11	1.11E-03
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	78.32	1.29E-04	1.23E-10	8.47E-04	8.06E-10	5.82E-03
	2	95.47	6.47E-04	6.16E-10	4.25E-03	4.04E-09	2.14E-02
	3	95.47	6.47E-04	6.16E-10	4.25E-03	4.04E-09	2.14E-02
	4	95.47	6.47E-04	6.16E-10	4.25E-03	4.04E-09	2.14E-02
	5	95.47	6.47E-04	6.16E-10	4.25E-03	4.04E-09	2.14E-02
	6	95.47	6.47E-04	6.16E-10	6.11E-03	5.81E-09	3.08E-02
	7	95.47	6.47E-04	6.16E-10	6.11E-03	5.81E-09	3.08E-02
	8	95.47	6.47E-04	6.16E-10	1.04E-02	9.85E-09	5.22E-02

<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	131.83	3.49E-04	3.32E-10	1.00E-03	9.54E-10	4.76E-03
	2	131.83	3.49E-04	3.32E-10	1.00E-03	9.54E-10	4.76E-03
	3	131.83	3.49E-04	3.32E-10	1.00E-03	9.54E-10	4.76E-03
	4	131.83	3.49E-04	3.32E-10	1.00E-03	9.54E-10	4.76E-03
	5	131.83	3.49E-04	3.32E-10	1.00E-03	9.54E-10	4.76E-03
	6	131.83	3.49E-04	3.32E-10	1.44E-03	1.37E-09	6.84E-03
	7	131.83	3.49E-04	3.32E-10	1.44E-03	1.37E-09	6.84E-03
	8	131.83	3.49E-04	3.32E-10	2.44E-03	2.33E-09	1.16E-02
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 48. LOM risk assessment results (islanding scenario 3, load profile LP3)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 49. LOM risk assessment results (islanding scenario 3, load profile LP4)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	116.96	1.65E-05	1.57E-11	1.08E-04	1.03E-10	5.22E-04
	3	116.96	1.65E-05	1.57E-11	1.08E-04	1.03E-10	5.22E-04
	4	116.96	1.65E-05	1.57E-11	1.08E-04	1.03E-10	5.22E-04
	5	116.96	1.65E-05	1.57E-11	1.08E-04	1.03E-10	5.22E-04
	6	116.96	1.65E-05	1.57E-11	1.56E-04	1.48E-10	7.50E-04
	7	116.96	1.65E-05	1.57E-11	1.56E-04	1.48E-10	7.50E-04
	8	116.96	1.65E-05	1.57E-11	2.64E-04	2.51E-10	1.27E-03

Generation Mix (m)	Setting Option	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	753.23	2.75E-04	2.61E-10	7.89E-04	7.51E-10	2.58E-03
	2	753.23	2.75E-04	2.61E-10	7.89E-04	7.51E-10	2.58E-03
	3	753.23	2.75E-04	2.61E-10	7.89E-04	7.51E-10	2.58E-03
	4	753.23	2.75E-04	2.61E-10	7.89E-04	7.51E-10	2.58E-03
	5	753.23	2.75E-04	2.61E-10	7.89E-04	7.51E-10	2.58E-03
	6	753.23	2.75E-04	2.61E-10	1.13E-03	1.08E-09	3.71E-03
	7	753.23	2.75E-04	2.61E-10	1.13E-03	1.08E-09	3.71E-03
	8	753.23	2.75E-04	2.61E-10	1.92E-03	1.83E-09	6.29E-03
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 50. LOM risk assessment results (islanding scenario 3, load profile LP5)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 51. LOM risk assessment results (islanding scenario 4, load profile LP06)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	9.67E-07
	2	44.00	5.91E-06	5.63E-12	5.47E-05	5.20E-11	9.17E-04
	3	44.00	5.91E-06	5.63E-12	5.47E-05	5.20E-11	9.17E-04
	4	44.00	5.91E-06	5.63E-12	5.47E-05	5.20E-11	9.17E-04
	5	40.67	4.36E-06	4.14E-12	4.03E-05	3.83E-11	6.13E-04
	6	44.00	5.91E-06	5.63E-12	1.11E-04	1.06E-10	1.86E-03
	7	44.00	5.91E-06	5.63E-12	1.11E-04	1.06E-10	1.86E-03
	8	44.00	5.91E-06	5.63E-12	1.66E-04	1.58E-10	2.78E-03
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	78.81	1.83E-05	1.74E-11	1.26E-04	1.20E-10	1.03E-03
	2	111.72	1.30E-04	1.24E-10	8.97E-04	8.54E-10	7.63E-03
	3	111.72	1.30E-04	1.24E-10	8.97E-04	8.54E-10	7.63E-03
	4	111.72	1.30E-04	1.24E-10	8.97E-04	8.54E-10	7.63E-03
	5	111.72	1.30E-04	1.24E-10	8.97E-04	8.54E-10	7.63E-03
	6	111.72	1.30E-04	1.24E-10	1.29E-03	1.23E-09	1.10E-02
	7	111.72	1.30E-04	1.24E-10	1.29E-03	1.23E-09	1.10E-02
	8	111.72	1.30E-04	1.24E-10	2.19E-03	2.08E-09	1.86E-02

Generation Mix ( <i>m</i> )	Setting Option	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	187.78	6.75E-04	6.42E-10	1.72E-03	1.64E-09	1.40E-02
	2	187.78	6.75E-04	6.42E-10	1.72E-03	1.64E-09	1.40E-02
	3	187.78	6.75E-04	6.42E-10	1.72E-03	1.64E-09	1.40E-02
	4	187.78	6.75E-04	6.42E-10	1.72E-03	1.64E-09	1.40E-02
	5	187.78	6.75E-04	6.42E-10	1.72E-03	1.64E-09	1.40E-02
	6	187.78	6.75E-04	6.42E-10	2.47E-03	2.35E-09	2.02E-02
	7	187.78	6.75E-04	6.42E-10	2.47E-03	2.35E-09	2.02E-02
	8	187.78	6.75E-04	6.42E-10	4.20E-03	3.99E-09	3.42E-02
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 52. LOM risk assessment results (islanding scenario 4, load profile LP07)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ <b>[min]</b>	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	1.34E-22	-1.25E-28	1.24E-21	0.00E+00	1.44E-05
	3	0.00	1.34E-22	-1.25E-28	1.24E-21	0.00E+00	1.44E-05
	4	0.00	1.34E-22	-1.25E-28	1.24E-21	0.00E+00	1.44E-05
	5	0.00	1.20E-22	-1.12E-28	1.11E-21	0.00E+00	1.26E-05
	6	0.00	1.34E-22	-1.25E-28	2.51E-21	0.00E+00	2.91E-05
	7	0.00	1.34E-22	-1.25E-28	2.51E-21	0.00E+00	2.91E-05
	8	0.00	1.34E-22	-1.25E-28	3.74E-21	0.00E+00	4.35E-05
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	82.00	8.69E-07	8.26E-13	5.98E-06	5.69E-12	5.79E-05
	2	112.95	1.53E-04	1.45E-10	1.05E-03	1.00E-09	6.68E-03
	3	112.95	1.53E-04	1.45E-10	1.05E-03	1.00E-09	6.68E-03
	4	112.95	1.53E-04	1.45E-10	1.05E-03	1.00E-09	6.68E-03
	5	112.95	1.53E-04	1.45E-10	1.05E-03	1.00E-09	6.68E-03
	6	112.95	1.53E-04	1.45E-10	1.51E-03	1.44E-09	9.60E-03
	7	112.95	1.53E-04	1.45E-10	1.51E-03	1.44E-09	9.60E-03
	8	112.95	1.53E-04	1.45E-10	2.56E-03	2.44E-09	1.63E-02

<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	255.35	1.21E-03	1.15E-09	3.08E-03	2.93E-09	1.66E-02
	2	255.35	1.21E-03	1.15E-09	3.08E-03	2.93E-09	1.66E-02
	3	255.35	1.21E-03	1.15E-09	3.08E-03	2.93E-09	1.66E-02
	4	255.35	1.21E-03	1.15E-09	3.08E-03	2.93E-09	1.66E-02
	5	255.35	1.21E-03	1.15E-09	3.08E-03	2.93E-09	1.66E-02
	6	255.35	1.21E-03	1.15E-09	4.43E-03	4.21E-09	2.39E-02
	7	255.35	1.21E-03	1.15E-09	4.43E-03	4.21E-09	2.39E-02
	8	255.35	1.21E-03	1.15E-09	7.51E-03	7.15E-09	4.05E-02
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 53. LOM risk assessment results (islanding scenario 4, load profile LP8)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ <b>[min]</b>	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.08E-07
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.08E-07
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.08E-07
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.08E-07
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.08E-07
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.56E-07
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.56E-07
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	2.64E-07
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 54. LOM risk assessment results (islanding scenario 4, load profile LP9)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	255.35	1.32E-04	1.26E-10	1.22E-03	1.16E-09	8.93E-03
	3	255.35	1.32E-04	1.26E-10	1.22E-03	1.16E-09	8.93E-03
	4	255.35	1.32E-04	1.26E-10	1.22E-03	1.16E-09	8.93E-03
	5	231.77	4.74E-05	4.51E-11	4.38E-04	4.17E-10	3.65E-03
	6	255.35	1.32E-04	1.26E-10	2.48E-03	2.36E-09	1.81E-02
	7	255.35	1.32E-04	1.26E-10	2.48E-03	2.36E-09	1.81E-02
	8	255.35	1.32E-04	1.26E-10	3.70E-03	3.52E-09	2.71E-02
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	567.33	6.54E-03	6.22E-09	4.50E-02	4.29E-08	2.58E-01
	2	615.30	7.91E-03	7.52E-09	5.45E-02	5.18E-08	3.22E-01
	3	615.30	7.91E-03	7.52E-09	5.45E-02	5.18E-08	3.22E-01
	4	615.30	7.91E-03	7.52E-09	5.45E-02	5.18E-08	3.22E-01
	5	615.30	7.91E-03	7.52E-09	5.45E-02	5.18E-08	3.22E-01
	6	615.30	7.91E-03	7.52E-09	7.83E-02	7.45E-08	4.62E-01
	7	615.30	7.91E-03	7.52E-09	7.83E-02	7.45E-08	4.62E-01
	8	615.30	7.91E-03	7.52E-09	1.33E-01	1.26E-07	7.83E-01

Generation Mix ( <i>m</i> )	Setting Option	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	819.90	1.08E-02	1.03E-08	2.76E-02	2.63E-08	1.50E-01
	2	819.90	1.08E-02	1.03E-08	2.76E-02	2.63E-08	1.50E-01
	3	819.90	1.08E-02	1.03E-08	2.76E-02	2.63E-08	1.50E-01
	4	819.90	1.08E-02	1.03E-08	2.76E-02	2.63E-08	1.50E-01
	5	819.90	1.08E-02	1.03E-08	2.76E-02	2.63E-08	1.50E-01
	6	819.90	1.08E-02	1.03E-08	3.96E-02	3.77E-08	2.16E-01
	7	819.90	1.08E-02	1.03E-08	3.96E-02	3.77E-08	2.16E-01
	8	819.90	1.08E-02	1.03E-08	6.72E-02	6.40E-08	3.67E-01
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 55. LOM risk assessment results (islanding scenario 4, load profile LP10)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	3.12E-04
	2	61.22	2.22E-07	2.11E-13	2.05E-06	1.95E-12	2.87E-03
	3	61.22	2.22E-07	2.11E-13	2.05E-06	1.95E-12	2.87E-03
	4	61.22	2.22E-07	2.11E-13	2.05E-06	1.95E-12	2.87E-03
	5	60.00	2.17E-07	2.07E-13	2.01E-06	1.91E-12	2.24E-03
	6	61.22	2.22E-07	2.11E-13	4.17E-06	3.97E-12	5.82E-03
	7	61.22	2.22E-07	2.11E-13	4.17E-06	3.97E-12	5.82E-03
	8	61.22	2.22E-07	2.11E-13	6.22E-06	5.92E-12	8.69E-03
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	52.55	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	58.38	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	58.38	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	58.38	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	58.38	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	58.38	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	58.38	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	58.38	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Generation Mix (m)	Setting Option	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	181.30	1.17E-04	1.11E-10	2.97E-04	2.83E-10	2.50E-03
	2	181.30	1.17E-04	1.11E-10	2.97E-04	2.83E-10	2.50E-03
	3	181.30	1.17E-04	1.11E-10	2.97E-04	2.83E-10	2.50E-03
	4	181.30	1.17E-04	1.11E-10	2.97E-04	2.83E-10	2.50E-03
	5	181.30	1.17E-04	1.11E-10	2.97E-04	2.83E-10	2.50E-03
	6	181.30	1.17E-04	1.11E-10	4.27E-04	4.06E-10	3.59E-03
	7	181.30	1.17E-04	1.11E-10	4.27E-04	4.06E-10	3.59E-03
	8	181.30	1.17E-04	1.11E-10	7.24E-04	6.89E-10	6.10E-03
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

### B.3. Result figures

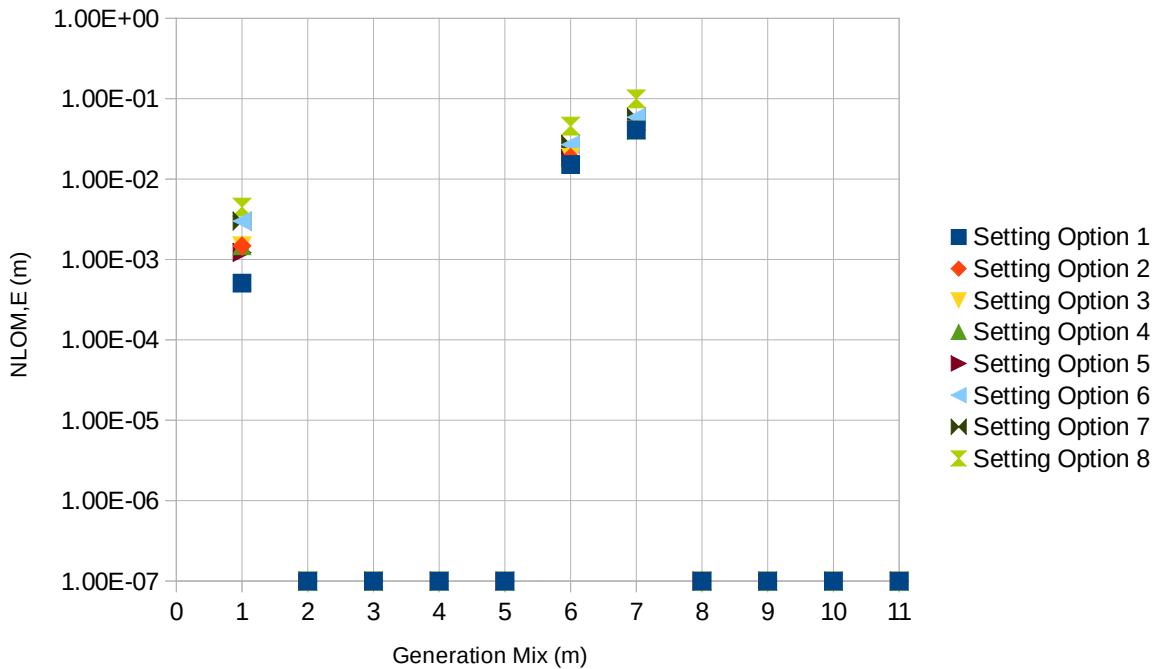


Figure 8. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 3, Load Profile LP01



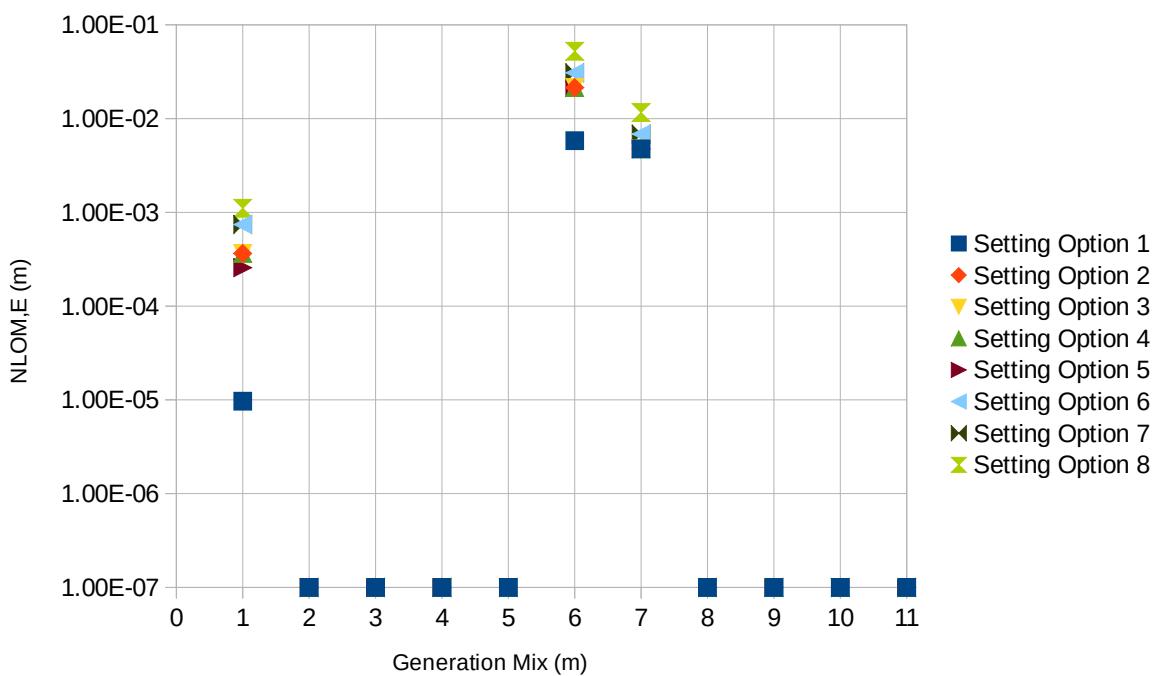



Figure 9. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 3, Load Profile LP02

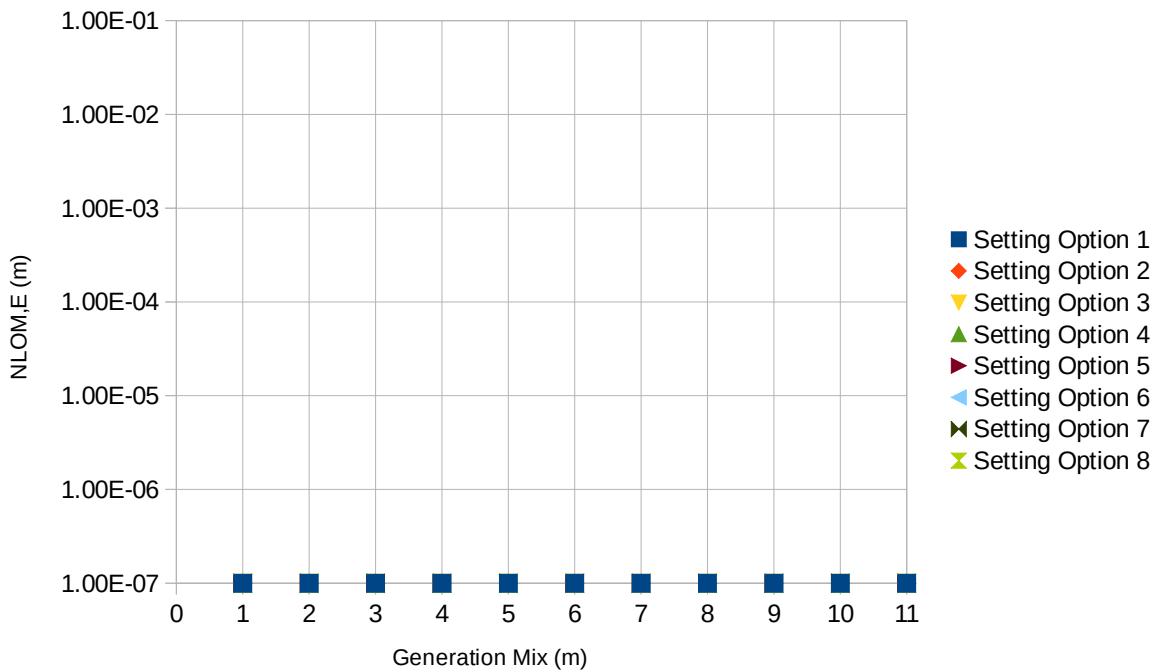


**Figure 10. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 3, Load Profile LP03**

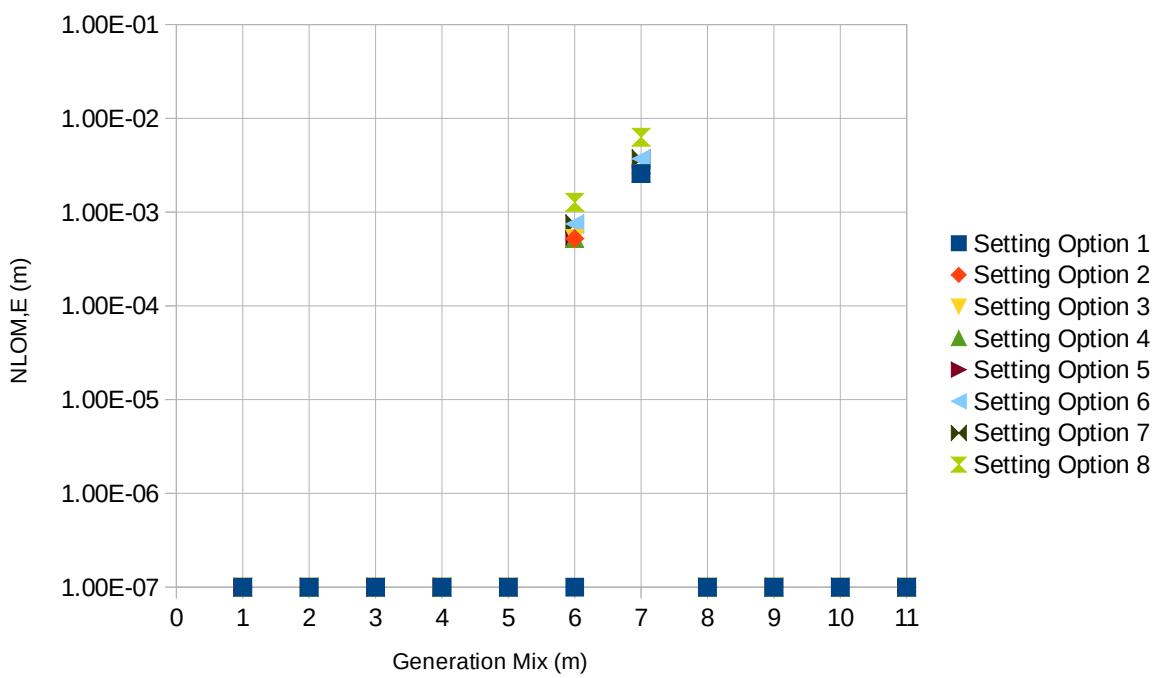


**Figure 11. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 3, Load Profile LP04**

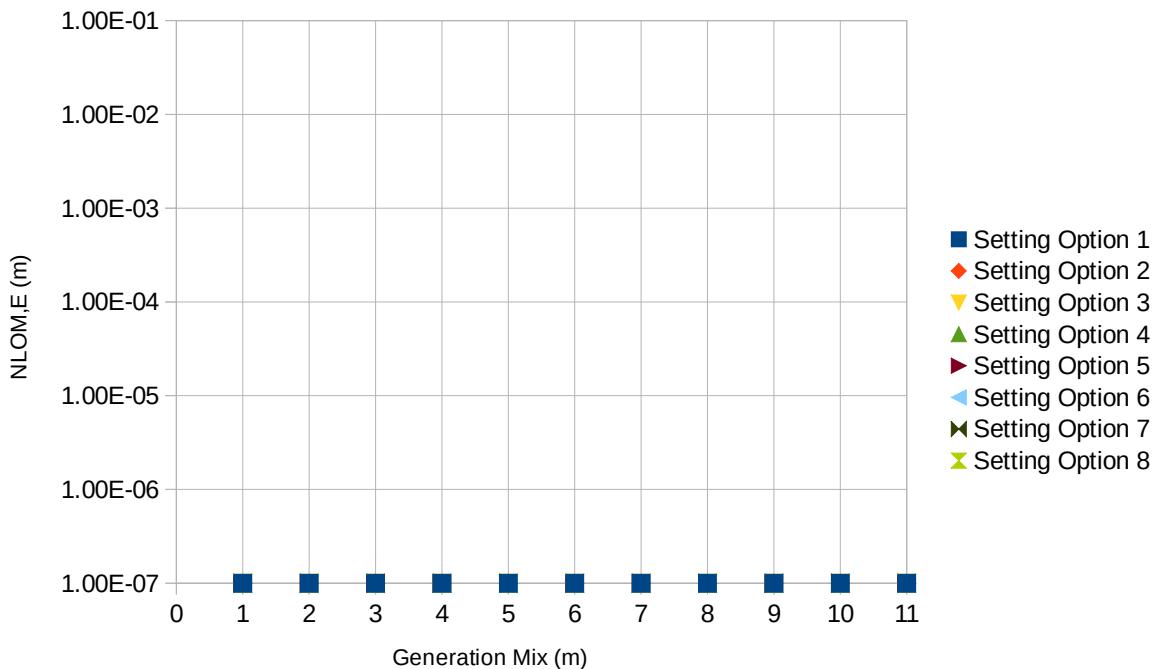


**Figure 12. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 3, Load Profile LP05**

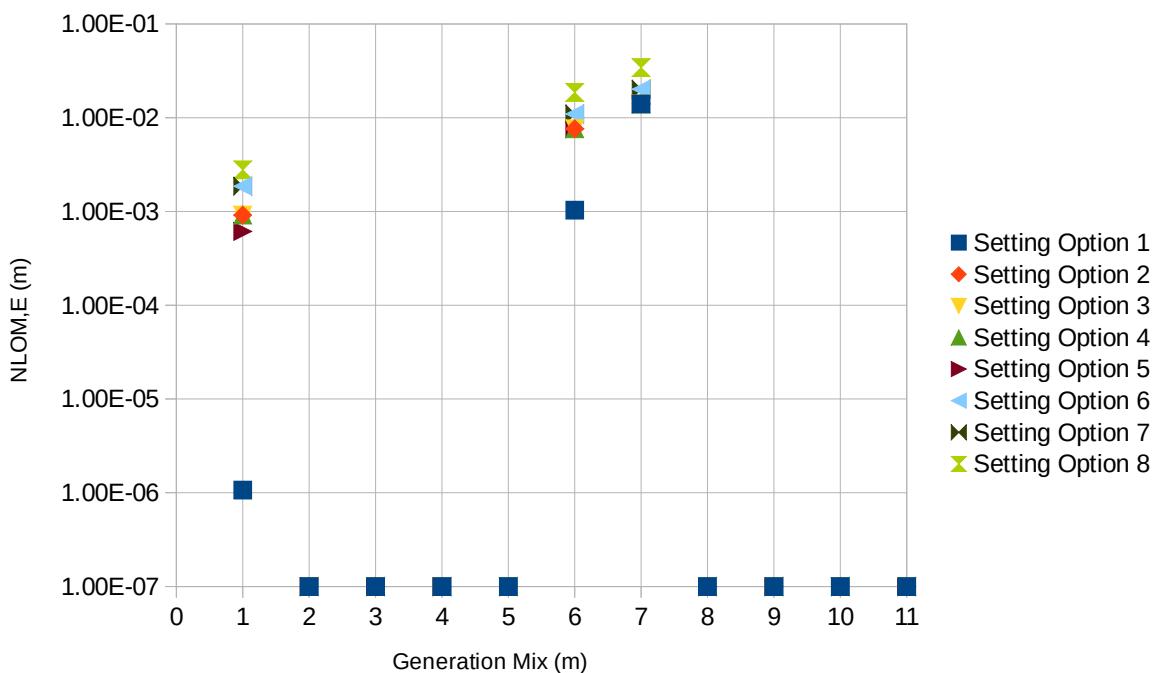


**Figure 13. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 4, Load Profile LP06**

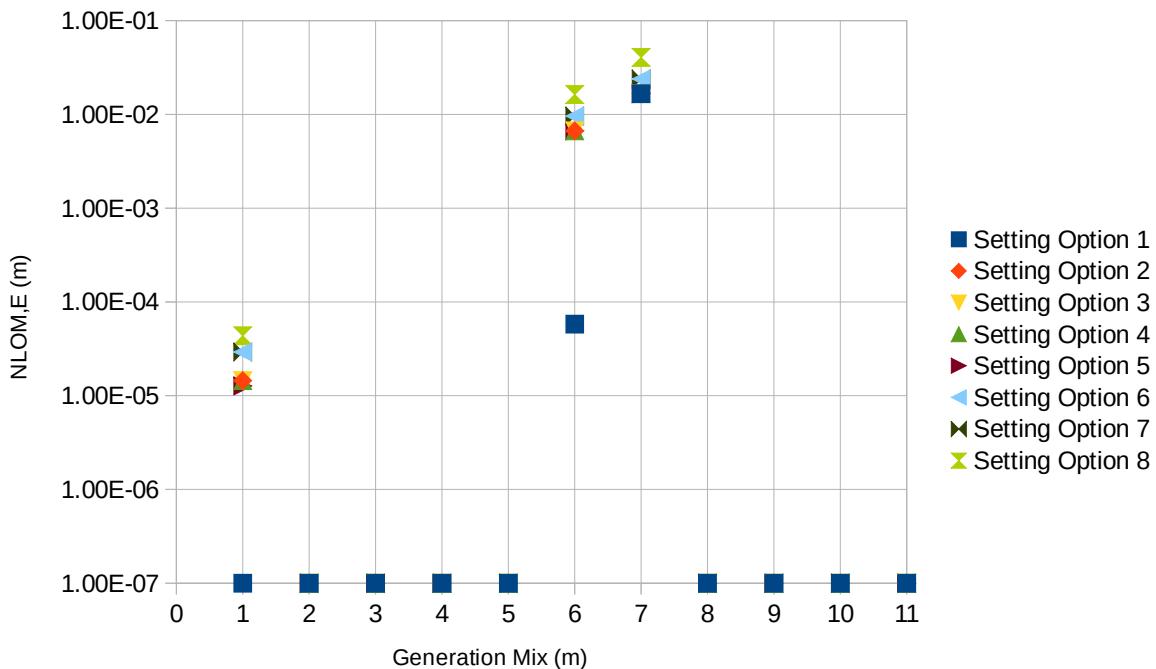


**Figure 14. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 4, Load Profile LP07**

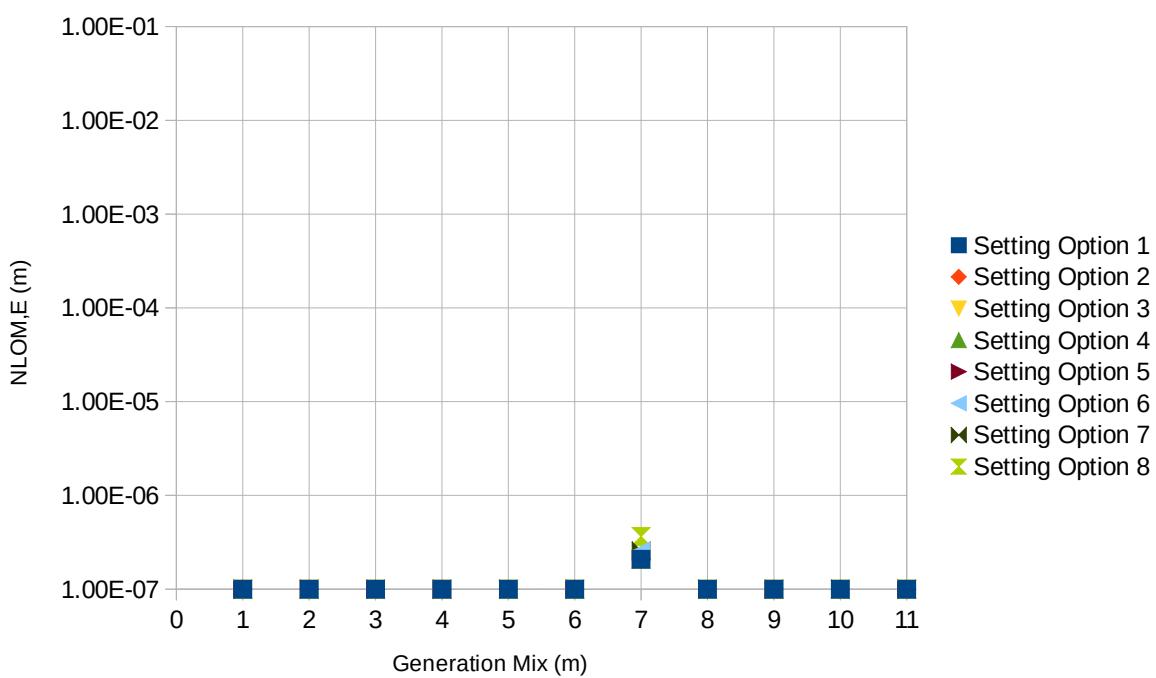

**Figure 15. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 4, Load Profile LP08**

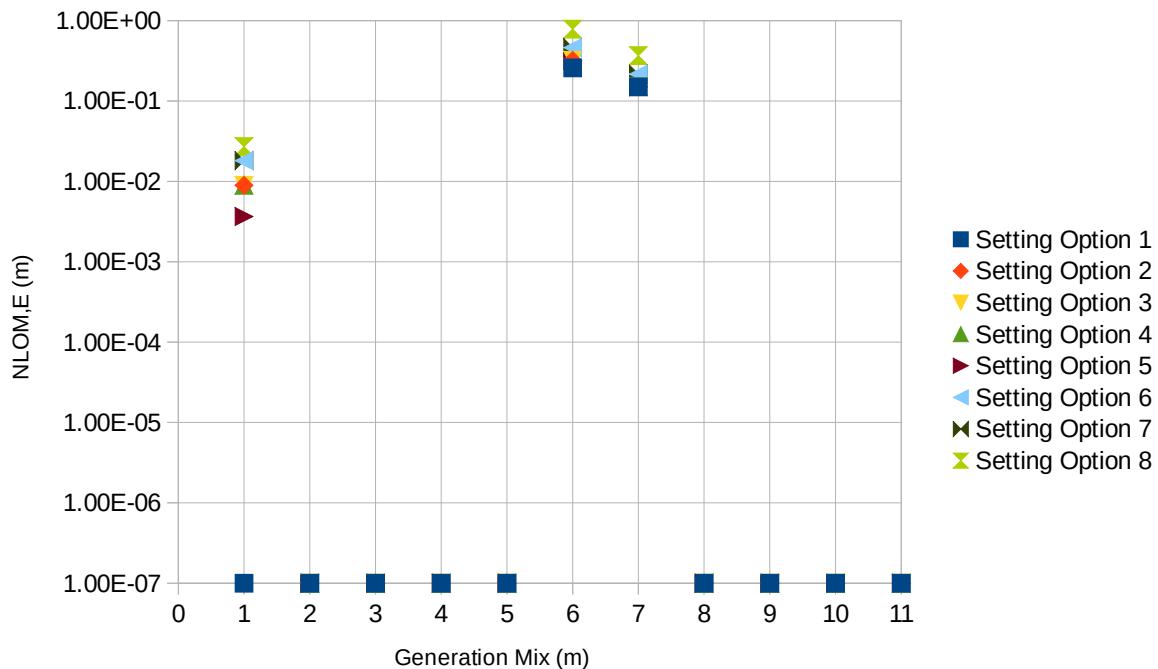

**Figure 16. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 4, Load Profile LP09**

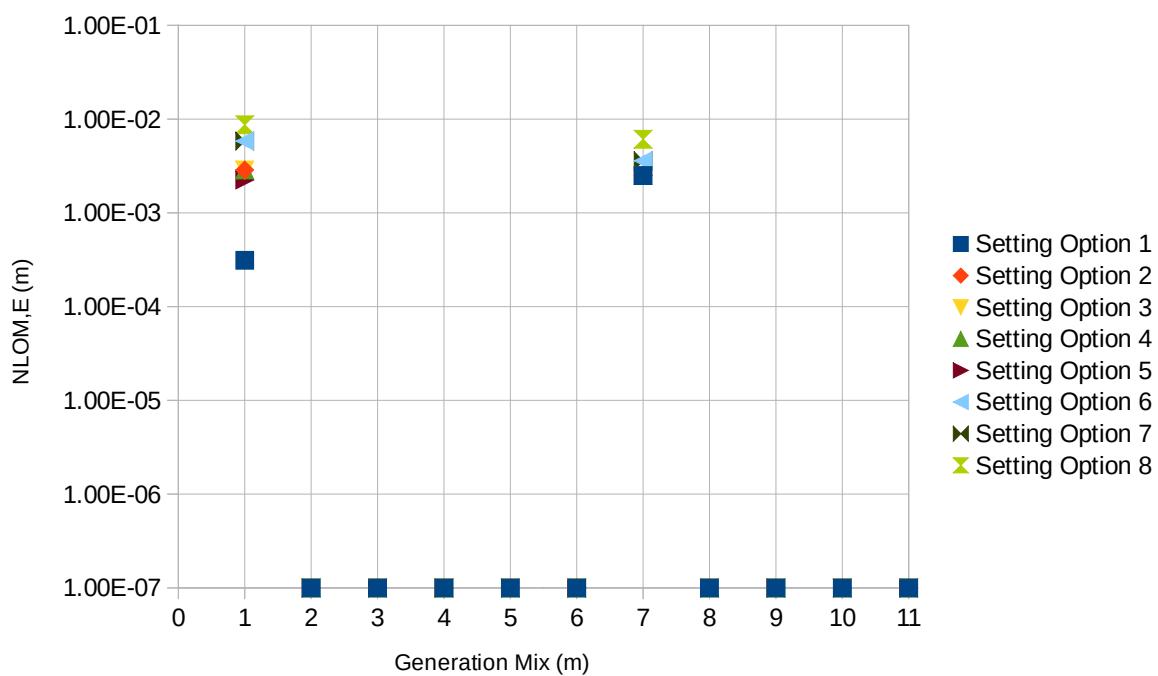

**Figure 17. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 4, Load Profile LP10**

## Appendix C: Full record of risk assessment results (Case Study 2.2)

### C.1. Summary Results

**Table 56. LOM risk assessment results for islanding scenario 3 (loss of supply to primary substation)**

Load Profile	Setting Option	$T_{NDZavr,s1}$ [min]	$N_{LOM,1DGG,s1}$	$P_{LOM,1DGG,s1}$	$N_{LOM,AR,s1}$	$P_{LOM,E,s1}$	$N_{LOM,E,s1}$
LP01	1	26.56	1.77E-04	1.68E-10	1.31E-02	1.24E-08	5.51E-02
	2	28.69	1.89E-04	1.80E-10	1.40E-02	1.33E-08	5.95E-02
	3	28.69	1.89E-04	1.80E-10	1.40E-02	1.33E-08	5.95E-02
	4	28.69	1.89E-04	1.80E-10	1.40E-02	1.33E-08	5.95E-02
	5	28.61	1.89E-04	1.80E-10	1.40E-02	1.33E-08	5.93E-02
	6	16.25	9.78E-05	9.30E-11	2.02E-02	1.93E-08	8.64E-02
	7	16.25	9.78E-05	9.30E-11	2.02E-02	1.93E-08	8.64E-02
	8	19.53	1.22E-04	1.16E-10	3.42E-02	3.26E-08	1.46E-01
LP02	1	18.58	2.38E-05	2.26E-11	1.76E-03	1.67E-09	1.04E-02
	2	19.38	6.74E-05	6.42E-11	4.99E-03	4.75E-09	2.60E-02
	3	19.38	6.74E-05	6.42E-11	4.99E-03	4.75E-09	2.60E-02
	4	19.38	6.74E-05	6.42E-11	4.99E-03	4.75E-09	2.60E-02
	5	19.28	6.73E-05	6.40E-11	4.98E-03	4.74E-09	2.59E-02
	6	11.17	3.47E-05	3.30E-11	7.18E-03	6.83E-09	3.76E-02
	7	11.17	3.47E-05	3.30E-11	7.18E-03	6.83E-09	3.76E-02
	8	13.33	4.33E-05	4.12E-11	1.22E-02	1.16E-08	6.36E-02
LP03	1	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
LP04	1	29.43	1.04E-05	9.85E-12	7.66E-04	7.29E-10	2.57E-03
	2	39.90	1.18E-05	1.12E-11	8.71E-04	8.29E-10	3.09E-03
	3	39.90	1.18E-05	1.12E-11	8.71E-04	8.29E-10	3.09E-03
	4	39.90	1.18E-05	1.12E-11	8.71E-04	8.29E-10	3.09E-03
	5	39.90	1.18E-05	1.12E-11	8.71E-04	8.29E-10	3.09E-03
	6	20.49	6.05E-06	5.75E-12	1.25E-03	1.19E-09	4.44E-03
	7	20.49	6.05E-06	5.75E-12	1.25E-03	1.19E-09	4.44E-03
	8	25.60	7.56E-06	7.19E-12	2.12E-03	2.02E-09	7.53E-03
LP05	1	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 57. LOM risk assessment results for islanding scenario 4 (loss of individual 11kV or 6.6kV feeder)**

<b>Load Profile</b>	<b>Setting Option</b>	$T_{NDZavr,s2}$ [min]	$N_{LOM,1DGG,s2}$	$P_{LOM,1DGG,s2}$	$N_{LOM,AR,s2}$	$P_{LOM,E,s2}$	$N_{LOM,E,s2}$
LP06	1	13.79	1.81E-05	1.72E-11	1.34E-03	1.27E-09	1.35E-02
	2	22.36	2.57E-05	2.44E-11	1.90E-03	1.81E-09	2.02E-02
	3	22.36	2.57E-05	2.44E-11	1.90E-03	1.81E-09	2.02E-02
	4	22.36	2.57E-05	2.44E-11	1.90E-03	1.81E-09	2.02E-02
	5	21.90	2.55E-05	2.43E-11	1.89E-03	1.80E-09	1.99E-02
	6	12.65	1.33E-05	1.27E-11	2.76E-03	2.62E-09	2.95E-02
	7	12.65	1.33E-05	1.27E-11	2.76E-03	2.62E-09	2.95E-02
	8	15.21	1.66E-05	1.58E-11	4.66E-03	4.43E-09	4.96E-02
LP07	1	16.47	2.85E-05	2.71E-11	2.11E-03	2.01E-09	1.43E-02
	2	19.41	3.81E-05	3.63E-11	2.82E-03	2.68E-09	2.00E-02
	3	19.41	3.81E-05	3.63E-11	2.82E-03	2.68E-09	2.00E-02
	4	19.41	3.81E-05	3.63E-11	2.82E-03	2.68E-09	2.00E-02
	5	19.41	3.81E-05	3.63E-11	2.82E-03	2.68E-09	2.00E-02
	6	9.96	1.96E-05	1.86E-11	4.05E-03	3.85E-09	2.87E-02
	7	9.96	1.96E-05	1.86E-11	4.05E-03	3.85E-09	2.87E-02
	8	12.45	2.45E-05	2.33E-11	6.87E-03	6.54E-09	4.87E-02
LP08	1	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.08E-07
	2	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.08E-07
	3	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.08E-07
	4	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.08E-07
	5	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.08E-07
	6	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.56E-07
	7	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.56E-07
	8	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.64E-07
LP09	1	81.37	6.40E-04	6.09E-10	4.73E-02	4.50E-08	3.35E-01
	2	117.89	7.34E-04	6.98E-10	5.43E-02	5.17E-08	3.94E-01
	3	117.89	7.34E-04	6.98E-10	5.43E-02	5.17E-08	3.94E-01
	4	117.89	7.34E-04	6.98E-10	5.43E-02	5.17E-08	3.94E-01
	5	114.89	7.27E-04	6.91E-10	5.38E-02	5.11E-08	3.90E-01
	6	67.32	3.79E-04	3.61E-10	7.86E-02	7.47E-08	5.71E-01
	7	67.32	3.79E-04	3.61E-10	7.86E-02	7.47E-08	5.71E-01
	8	80.64	4.73E-04	4.50E-10	1.33E-01	1.26E-07	9.65E-01
LP10	1	11.18	2.73E-06	2.60E-12	2.02E-04	1.92E-10	2.45E-03
	2	19.37	2.76E-06	2.63E-12	2.04E-04	1.94E-10	4.97E-03
	3	19.37	2.76E-06	2.63E-12	2.04E-04	1.94E-10	4.97E-03
	4	19.37	2.76E-06	2.63E-12	2.04E-04	1.94E-10	4.97E-03
	5	19.21	2.76E-06	2.63E-12	2.04E-04	1.94E-10	4.36E-03
	6	11.57	1.42E-06	1.35E-12	2.95E-04	2.80E-10	8.83E-03
	7	11.57	1.42E-06	1.35E-12	2.95E-04	2.80E-10	8.83E-03
	8	13.62	1.78E-06	1.69E-12	4.99E-04	4.75E-10	1.38E-02

**Table 58. Summary LOM risk assessment results – based on maximum load profile figures**

LOM Scenario	Setting Option	$T_{NDZavr}$ [min]	$N_{LOM,1DGG}$	$P_{LOM,1DGG}$	$N_{LOM,AR}$	$P_{LOM,E}$	$N_{LOM,E}$
S3	1	29.4	1.77E-04	1.68E-10	1.31E-02	1.24E-08	5.51E-02
	2	39.9	1.89E-04	1.80E-10	1.40E-02	1.33E-08	5.95E-02
	3	39.9	1.89E-04	1.80E-10	1.40E-02	1.33E-08	5.95E-02
	4	39.9	1.89E-04	1.80E-10	1.40E-02	1.33E-08	5.95E-02
	5	39.9	1.89E-04	1.80E-10	1.40E-02	1.33E-08	5.93E-02
	6	20.5	9.78E-05	9.30E-11	2.02E-02	1.93E-08	8.64E-02
	7	20.5	9.78E-05	9.30E-11	2.02E-02	1.93E-08	8.64E-02
	8	25.6	1.22E-04	1.16E-10	3.42E-02	3.26E-08	1.46E-01
S4	1	81.37	6.40E-04	6.09E-10	4.73E-02	4.50E-08	3.35E-01
	2	117.89	7.34E-04	6.98E-10	5.43E-02	5.17E-08	3.94E-01
	3	117.89	7.34E-04	6.98E-10	5.43E-02	5.17E-08	3.94E-01
	4	117.89	7.34E-04	6.98E-10	5.43E-02	5.17E-08	3.94E-01
	5	114.89	7.27E-04	6.91E-10	5.38E-02	5.11E-08	3.90E-01
	6	67.32	3.79E-04	3.61E-10	7.86E-02	7.47E-08	5.71E-01
	7	67.32	3.79E-04	3.61E-10	7.86E-02	7.47E-08	5.71E-01
	8	80.64	4.73E-04	4.50E-10	1.33E-01	1.26E-07	9.65E-01
Combined S3 & S4	1	55.40	4.08E-04	3.88E-10	6.04E-02	5.75E-08	3.91E-01
	2	78.89	4.62E-04	4.39E-10	6.83E-02	6.50E-08	4.54E-01
	3	78.89	4.62E-04	4.39E-10	6.83E-02	6.50E-08	4.54E-01
	4	78.89	4.62E-04	4.39E-10	6.83E-02	6.50E-08	4.54E-01
	5	77.40	4.58E-04	4.35E-10	6.77E-02	6.44E-08	4.49E-01
	6	43.91	2.39E-04	2.27E-10	9.88E-02	9.40E-08	6.57E-01
	7	43.91	2.39E-04	2.27E-10	9.88E-02	9.40E-08	6.57E-01
	8	53.12	2.97E-04	2.83E-10	1.67E-01	1.59E-07	1.11E+00

**Table 59. Summary LOM risk assessment results – based on average load profile figures**

LOM Scenario	Setting Option	$T_{NDZavr}$ [min]	$N_{LOM,1DGG}$	$P_{LOM,1DGG}$	$N_{LOM,AR}$	$P_{LOM,E}$	$N_{LOM,E}$
S3	1	14.91	4.22E-05	4.01E-11	3.12E-03	2.97E-09	1.36E-02
	2	17.59	5.37E-05	5.11E-11	3.97E-03	3.78E-09	1.77E-02
	3	17.59	5.37E-05	5.11E-11	3.97E-03	3.78E-09	1.77E-02
	4	17.59	5.37E-05	5.11E-11	3.97E-03	3.78E-09	1.77E-02
	5	17.56	5.36E-05	5.10E-11	3.97E-03	3.77E-09	1.77E-02
	6	9.58	2.77E-05	2.64E-11	5.74E-03	5.46E-09	2.57E-02
	7	9.58	2.77E-05	2.64E-11	5.74E-03	5.46E-09	2.57E-02
	8	11.69	3.46E-05	3.29E-11	9.71E-03	9.24E-09	4.34E-02
S4	1	24.56	1.38E-04	1.31E-10	1.02E-02	9.70E-09	7.31E-02
	2	35.80	1.60E-04	1.52E-10	1.18E-02	1.13E-08	8.79E-02
	3	35.80	1.60E-04	1.52E-10	1.18E-02	1.13E-08	8.79E-02
	4	35.80	1.60E-04	1.52E-10	1.18E-02	1.13E-08	8.79E-02
	5	35.08	1.59E-04	1.51E-10	1.17E-02	1.12E-08	8.68E-02
	6	20.30	8.28E-05	7.87E-11	1.71E-02	1.63E-08	1.28E-01
	7	20.30	8.28E-05	7.87E-11	1.71E-02	1.63E-08	1.28E-01
	8	24.38	1.03E-04	9.81E-11	2.90E-02	2.76E-08	2.16E-01
Combined S3 & S4	1	19.74	9.00E-05	8.56E-11	1.33E-02	1.27E-08	8.68E-02
	2	26.70	1.07E-04	1.02E-10	1.58E-02	1.51E-08	1.06E-01
	3	26.70	1.07E-04	1.02E-10	1.58E-02	1.51E-08	1.06E-01
	4	26.70	1.07E-04	1.02E-10	1.58E-02	1.51E-08	1.06E-01
	5	26.32	1.06E-04	1.01E-10	1.57E-02	1.49E-08	1.04E-01
	6	14.94	5.52E-05	5.25E-11	2.29E-02	2.18E-08	1.53E-01
	7	14.94	5.52E-05	5.25E-11	2.29E-02	2.18E-08	1.53E-01
	8	18.04	6.88E-05	6.55E-11	3.87E-02	3.68E-08	2.59E-01

## C.2. Detailed results for different generation mixes and load profiles

**Table 60. LOM risk assessment results (islanding scenario 3, load profile LP01)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
1	1	54.91	6.14E-06	5.84E-12	5.68E-05	5.40E-11	5.07E-04
	2	57.34	2.32E-05	2.21E-11	2.14E-04	2.04E-10	1.47E-03
	3	57.34	2.32E-05	2.21E-11	2.14E-04	2.04E-10	1.47E-03
	4	57.34	2.32E-05	2.21E-11	2.14E-04	2.04E-10	1.47E-03
	5	56.70	2.03E-05	1.93E-11	1.88E-04	1.79E-10	1.22E-03
	6	57.34	2.32E-05	2.21E-11	4.35E-04	4.14E-10	2.99E-03
	7	57.34	2.32E-05	2.21E-11	4.35E-04	4.14E-10	2.99E-03
	8	57.34	2.32E-05	2.21E-11	6.50E-04	6.18E-10	4.46E-03
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	86.52	4.78E-04	4.55E-10	3.14E-03	2.99E-09	1.48E-02
	2	107.09	5.96E-04	5.67E-10	3.92E-03	3.72E-09	1.83E-02
	3	107.09	5.96E-04	5.67E-10	3.92E-03	3.72E-09	1.83E-02
	4	107.09	5.96E-04	5.67E-10	3.92E-03	3.72E-09	1.83E-02
	5	107.09	5.96E-04	5.67E-10	3.92E-03	3.72E-09	1.83E-02
	6	107.09	5.96E-04	5.67E-10	5.62E-03	5.35E-09	2.62E-02
	7	107.09	5.96E-04	5.67E-10	5.62E-03	5.35E-09	2.62E-02
	8	107.09	5.96E-04	5.67E-10	9.54E-03	9.08E-09	4.45E-02

<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	309.72	3.44E-03	3.27E-09	9.87E-03	9.39E-09	3.98E-02
	2	309.72	3.44E-03	3.27E-09	9.87E-03	9.39E-09	3.98E-02
	3	309.72	3.44E-03	3.27E-09	9.87E-03	9.39E-09	3.98E-02
	4	309.72	3.44E-03	3.27E-09	9.87E-03	9.39E-09	3.98E-02
	5	309.72	3.44E-03	3.27E-09	9.87E-03	9.39E-09	3.98E-02
	6	309.72	3.44E-03	3.27E-09	1.42E-02	1.35E-08	5.72E-02
	7	309.72	3.44E-03	3.27E-09	1.42E-02	1.35E-08	5.72E-02
	8	309.72	3.44E-03	3.27E-09	2.41E-02	2.29E-08	9.70E-02
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 61. LOM risk assessment results (islanding scenario 3, load profile LP02)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	1	52.00	1.35E-22	1.29E-28	1.25E-21	1.19E-27	9.57E-06
	2	46.20	3.01E-06	2.86E-12	2.78E-05	2.65E-11	3.65E-04
	3	46.20	3.01E-06	2.86E-12	2.78E-05	2.65E-11	3.65E-04
	4	46.20	3.01E-06	2.86E-12	2.78E-05	2.65E-11	3.65E-04
	5	45.45	2.08E-06	1.98E-12	1.92E-05	1.83E-11	2.57E-04
	6	46.20	3.01E-06	2.86E-12	5.65E-05	5.37E-11	7.41E-04
	7	46.20	3.01E-06	2.86E-12	5.65E-05	5.37E-11	7.41E-04
	8	46.20	3.01E-06	2.86E-12	8.43E-05	8.02E-11	1.11E-03
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	78.48	1.23E-04	1.17E-10	8.05E-04	7.65E-10	5.73E-03
	2	95.56	6.10E-04	5.81E-10	4.01E-03	3.81E-09	2.10E-02
	3	95.56	6.10E-04	5.81E-10	4.01E-03	3.81E-09	2.10E-02
	4	95.56	6.10E-04	5.81E-10	4.01E-03	3.81E-09	2.10E-02
	5	95.56	6.10E-04	5.81E-10	4.01E-03	3.81E-09	2.10E-02
	6	95.56	6.10E-04	5.81E-10	5.76E-03	5.48E-09	3.01E-02
	7	95.56	6.10E-04	5.81E-10	5.76E-03	5.48E-09	3.01E-02
	8	95.56	6.10E-04	5.81E-10	9.76E-03	9.29E-09	5.11E-02

Generation Mix ( <i>m</i> )	Setting Option	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	131.99	3.32E-04	3.16E-10	9.54E-04	9.08E-10	4.68E-03
	2	131.99	3.32E-04	3.16E-10	9.54E-04	9.08E-10	4.68E-03
	3	131.99	3.32E-04	3.16E-10	9.54E-04	9.08E-10	4.68E-03
	4	131.99	3.32E-04	3.16E-10	9.54E-04	9.08E-10	4.68E-03
	5	131.99	3.32E-04	3.16E-10	9.54E-04	9.08E-10	4.68E-03
	6	131.99	3.32E-04	3.16E-10	1.37E-03	1.30E-09	6.72E-03
	7	131.99	3.32E-04	3.16E-10	1.37E-03	1.30E-09	6.72E-03
	8	131.99	3.32E-04	3.16E-10	2.33E-03	2.21E-09	1.14E-02
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 62. LOM risk assessment results (islanding scenario 3, load profile LP3)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 63. LOM risk assessment results (islanding scenario 3, load profile LP4)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	118.01	1.61E-05	1.53E-11	1.06E-04	1.00E-10	5.20E-04
	3	118.01	1.61E-05	1.53E-11	1.06E-04	1.00E-10	5.20E-04
	4	118.01	1.61E-05	1.53E-11	1.06E-04	1.00E-10	5.20E-04
	5	118.01	1.61E-05	1.53E-11	1.06E-04	1.00E-10	5.20E-04
	6	118.01	1.61E-05	1.53E-11	1.52E-04	1.44E-10	7.47E-04
	7	118.01	1.61E-05	1.53E-11	1.52E-04	1.44E-10	7.47E-04
	8	118.01	1.61E-05	1.53E-11	2.57E-04	2.45E-10	1.27E-03

Generation Mix (m)	Setting Option	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	757.86	2.67E-04	2.54E-10	7.66E-04	7.29E-10	2.57E-03
	2	757.86	2.67E-04	2.54E-10	7.66E-04	7.29E-10	2.57E-03
	3	757.86	2.67E-04	2.54E-10	7.66E-04	7.29E-10	2.57E-03
	4	757.86	2.67E-04	2.54E-10	7.66E-04	7.29E-10	2.57E-03
	5	757.86	2.67E-04	2.54E-10	7.66E-04	7.29E-10	2.57E-03
	6	757.86	2.67E-04	2.54E-10	1.10E-03	1.05E-09	3.69E-03
	7	757.86	2.67E-04	2.54E-10	1.10E-03	1.05E-09	3.69E-03
	8	757.86	2.67E-04	2.54E-10	1.87E-03	1.78E-09	6.26E-03
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 64. LOM risk assessment results (islanding scenario 3, load profile LP5)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 65. LOM risk assessment results (islanding scenario 4, load profile LP06)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	9.67E-07
	2	44.21	4.67E-06	4.44E-12	4.32E-05	4.11E-11	8.48E-04
	3	44.21	4.67E-06	4.44E-12	4.32E-05	4.11E-11	8.48E-04
	4	44.21	4.67E-06	4.44E-12	4.32E-05	4.11E-11	8.48E-04
	5	40.47	3.41E-06	3.25E-12	3.15E-05	3.00E-11	5.71E-04
	6	44.21	4.67E-06	4.44E-12	8.76E-05	8.34E-11	1.72E-03
	7	44.21	4.67E-06	4.44E-12	8.76E-05	8.34E-11	1.72E-03
	8	44.21	4.67E-06	4.44E-12	1.31E-04	1.24E-10	2.57E-03
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	78.14	1.36E-05	1.29E-11	9.35E-05	8.89E-11	9.29E-04
	2	110.87	8.88E-05	8.45E-11	6.12E-04	5.82E-10	6.73E-03
	3	110.87	8.88E-05	8.45E-11	6.12E-04	5.82E-10	6.73E-03
	4	110.87	8.88E-05	8.45E-11	6.12E-04	5.82E-10	6.73E-03
	5	110.87	8.88E-05	8.45E-11	6.12E-04	5.82E-10	6.73E-03
	6	110.87	8.88E-05	8.45E-11	8.79E-04	8.36E-10	9.66E-03
	7	110.87	8.88E-05	8.45E-11	8.79E-04	8.36E-10	9.66E-03
	8	110.87	8.88E-05	8.45E-11	1.49E-03	1.42E-09	1.64E-02

Generation Mix (m)	Setting Option	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	189.09	4.88E-04	4.65E-10	1.25E-03	1.19E-09	1.26E-02
	2	189.09	4.88E-04	4.65E-10	1.25E-03	1.19E-09	1.26E-02
	3	189.09	4.88E-04	4.65E-10	1.25E-03	1.19E-09	1.26E-02
	4	189.09	4.88E-04	4.65E-10	1.25E-03	1.19E-09	1.26E-02
	5	189.09	4.88E-04	4.65E-10	1.25E-03	1.19E-09	1.26E-02
	6	189.09	4.88E-04	4.65E-10	1.79E-03	1.70E-09	1.81E-02
	7	189.09	4.88E-04	4.65E-10	1.79E-03	1.70E-09	1.81E-02
	8	189.09	4.88E-04	4.65E-10	3.04E-03	2.89E-09	3.07E-02
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 66. LOM risk assessment results (islanding scenario 4, load profile LP07)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ <b>[min]</b>	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	1.29E-22	-1.21E-28	1.19E-21	0.00E+00	1.40E-05
	3	0.00	1.29E-22	-1.21E-28	1.19E-21	0.00E+00	1.40E-05
	4	0.00	1.29E-22	-1.21E-28	1.19E-21	0.00E+00	1.40E-05
	5	0.00	1.11E-22	-1.04E-28	1.03E-21	0.00E+00	1.19E-05
	6	0.00	1.29E-22	-1.21E-28	2.42E-21	0.00E+00	2.83E-05
	7	0.00	1.29E-22	-1.21E-28	2.42E-21	0.00E+00	2.83E-05
	8	0.00	1.29E-22	-1.21E-28	3.61E-21	0.00E+00	4.23E-05
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	82.00	8.69E-07	8.26E-13	5.98E-06	5.69E-12	5.79E-05
	2	113.49	1.04E-04	9.89E-11	7.16E-04	6.81E-10	5.76E-03
	3	113.49	1.04E-04	9.89E-11	7.16E-04	6.81E-10	5.76E-03
	4	113.49	1.04E-04	9.89E-11	7.16E-04	6.81E-10	5.76E-03
	5	113.49	1.04E-04	9.89E-11	7.16E-04	6.81E-10	5.76E-03
	6	113.49	1.04E-04	9.89E-11	1.03E-03	9.79E-10	8.27E-03
	7	113.49	1.04E-04	9.89E-11	1.03E-03	9.79E-10	8.27E-03
	8	113.49	1.04E-04	9.89E-11	1.75E-03	1.66E-09	1.40E-02

<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	256.38	8.25E-04	7.85E-10	2.10E-03	2.00E-09	1.42E-02
	2	256.38	8.25E-04	7.85E-10	2.10E-03	2.00E-09	1.42E-02
	3	256.38	8.25E-04	7.85E-10	2.10E-03	2.00E-09	1.42E-02
	4	256.38	8.25E-04	7.85E-10	2.10E-03	2.00E-09	1.42E-02
	5	256.38	8.25E-04	7.85E-10	2.10E-03	2.00E-09	1.42E-02
	6	256.38	8.25E-04	7.85E-10	3.02E-03	2.88E-09	2.04E-02
	7	256.38	8.25E-04	7.85E-10	3.02E-03	2.88E-09	2.04E-02
	8	256.38	8.25E-04	7.85E-10	5.13E-03	4.88E-09	3.46E-02
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 67. LOM risk assessment results (islanding scenario 4, load profile LP8)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ <b>[min]</b>	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.08E-07
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.08E-07
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.08E-07
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.08E-07
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.08E-07
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.56E-07
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.56E-07
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	2.64E-07
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 68. LOM risk assessment results (islanding scenario 4, load profile LP9)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	256.36	9.44E-05	8.98E-11	8.73E-04	8.30E-10	7.75E-03
	3	256.36	9.44E-05	8.98E-11	8.73E-04	8.30E-10	7.75E-03
	4	256.36	9.44E-05	8.98E-11	8.73E-04	8.30E-10	7.75E-03
	5	232.36	3.47E-05	3.30E-11	3.21E-04	3.05E-10	3.25E-03
	6	256.36	9.44E-05	8.98E-11	1.77E-03	1.69E-09	1.57E-02
	7	256.36	9.44E-05	8.98E-11	1.77E-03	1.69E-09	1.57E-02
	8	256.36	9.44E-05	8.98E-11	2.64E-03	2.52E-09	2.35E-02
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	569.56	4.25E-03	4.04E-09	2.92E-02	2.78E-08	2.12E-01
	2	617.94	5.13E-03	4.88E-09	3.53E-02	3.36E-08	2.63E-01
	3	617.94	5.13E-03	4.88E-09	3.53E-02	3.36E-08	2.63E-01
	4	617.94	5.13E-03	4.88E-09	3.53E-02	3.36E-08	2.63E-01
	5	617.94	5.13E-03	4.88E-09	3.53E-02	3.36E-08	2.63E-01
	6	617.94	5.13E-03	4.88E-09	5.08E-02	4.83E-08	3.77E-01
	7	617.94	5.13E-03	4.88E-09	5.08E-02	4.83E-08	3.77E-01
	8	617.94	5.13E-03	4.88E-09	8.61E-02	8.19E-08	6.40E-01


<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	821.95	7.09E-03	6.75E-09	1.81E-02	1.72E-08	1.24E-01
	2	821.95	7.09E-03	6.75E-09	1.81E-02	1.72E-08	1.24E-01
	3	821.95	7.09E-03	6.75E-09	1.81E-02	1.72E-08	1.24E-01
	4	821.95	7.09E-03	6.75E-09	1.81E-02	1.72E-08	1.24E-01
	5	821.95	7.09E-03	6.75E-09	1.81E-02	1.72E-08	1.24E-01
	6	821.95	7.09E-03	6.75E-09	2.60E-02	2.47E-08	1.78E-01
	7	821.95	7.09E-03	6.75E-09	2.60E-02	2.47E-08	1.78E-01
	8	821.95	7.09E-03	6.75E-09	4.41E-02	4.19E-08	3.02E-01
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 69. LOM risk assessment results (islanding scenario 4, load profile LP10)**


<b>Generation Mix (m)</b>	<b>Setting Option</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	3.12E-04
	2	61.22	2.20E-07	2.09E-13	2.03E-06	1.93E-12	2.84E-03
	3	61.22	2.20E-07	2.09E-13	2.03E-06	1.93E-12	2.84E-03
	4	61.22	2.20E-07	2.09E-13	2.03E-06	1.93E-12	2.84E-03
	5	60.00	2.15E-07	2.04E-13	1.99E-06	1.89E-12	2.22E-03
	6	61.22	2.20E-07	2.09E-13	4.12E-06	3.92E-12	5.76E-03
	7	61.22	2.20E-07	2.09E-13	4.12E-06	3.92E-12	5.76E-03
	8	61.22	2.20E-07	2.09E-13	6.16E-06	5.86E-12	8.60E-03
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	52.55	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	58.38	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	58.38	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	58.38	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	58.38	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	58.38	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	58.38	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	58.38	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Generation Mix (m)	Setting Option	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	182.25	7.93E-05	7.54E-11	2.02E-04	1.92E-10	2.14E-03
	2	182.25	7.93E-05	7.54E-11	2.02E-04	1.92E-10	2.14E-03
	3	182.25	7.93E-05	7.54E-11	2.02E-04	1.92E-10	2.14E-03
	4	182.25	7.93E-05	7.54E-11	2.02E-04	1.92E-10	2.14E-03
	5	182.25	7.93E-05	7.54E-11	2.02E-04	1.92E-10	2.14E-03
	6	182.25	7.93E-05	7.54E-11	2.91E-04	2.76E-10	3.07E-03
	7	182.25	7.93E-05	7.54E-11	2.91E-04	2.76E-10	3.07E-03
	8	182.25	7.93E-05	7.54E-11	4.93E-04	4.69E-10	5.20E-03
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00


### C.3. Result figures

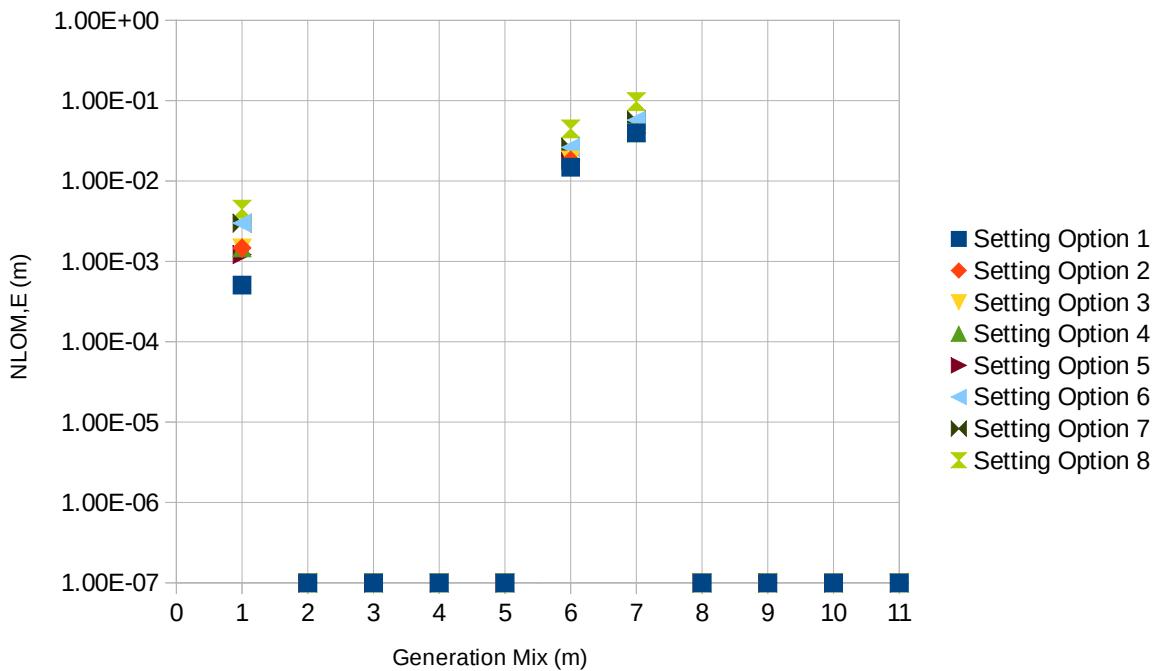


**Figure 18. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 3, Load Profile LP01**

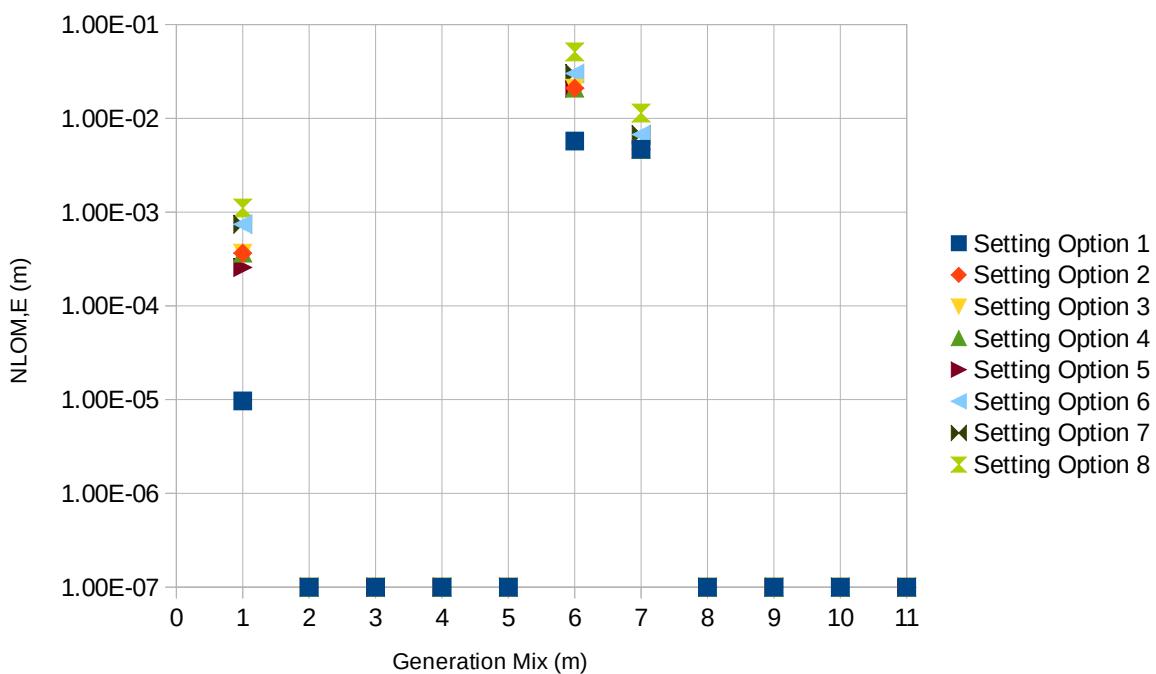


**Figure 19. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 3, Load Profile LP02**

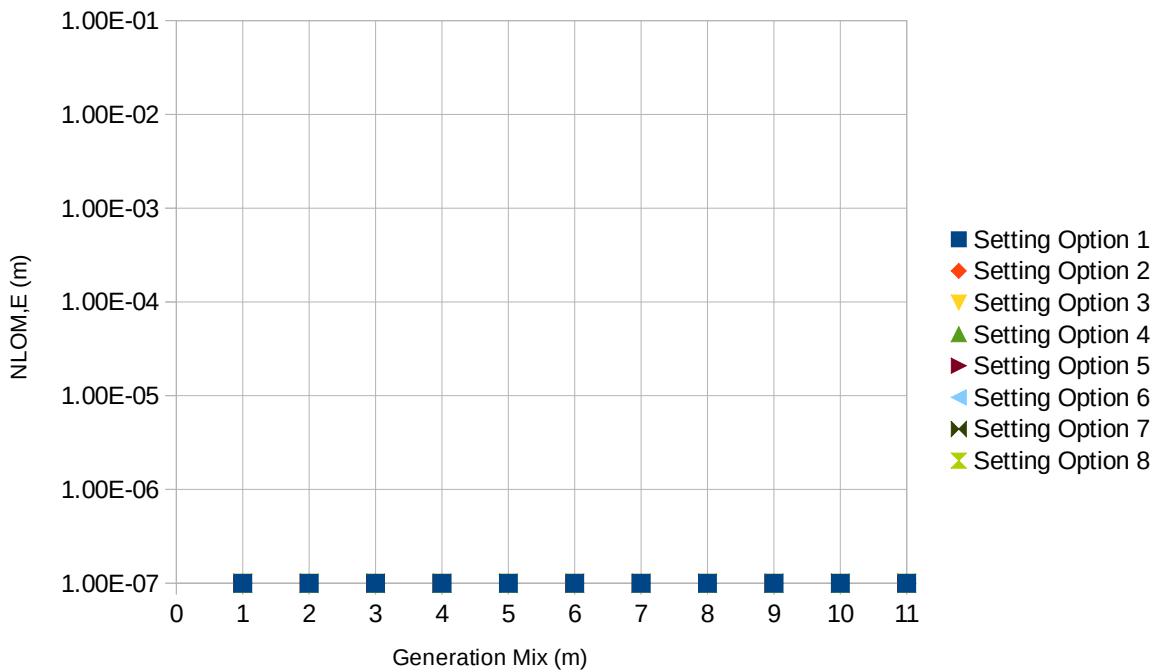


**Figure 20. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 3, Load Profile LP03**

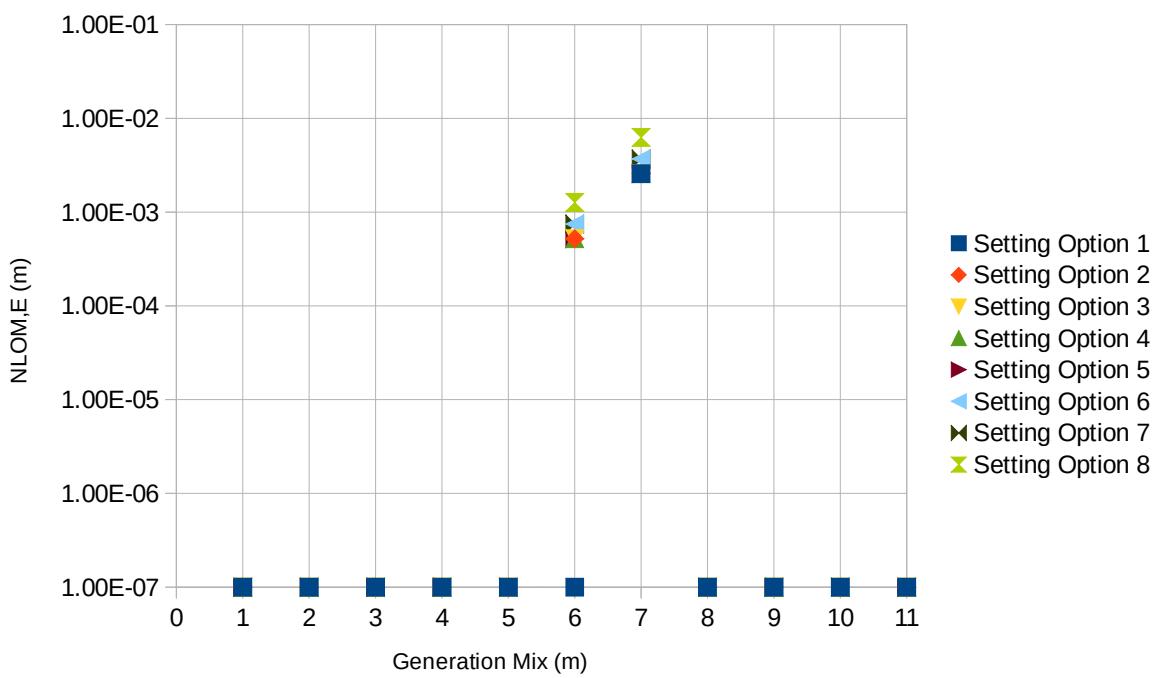


**Figure 21. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 3, Load Profile LP04**

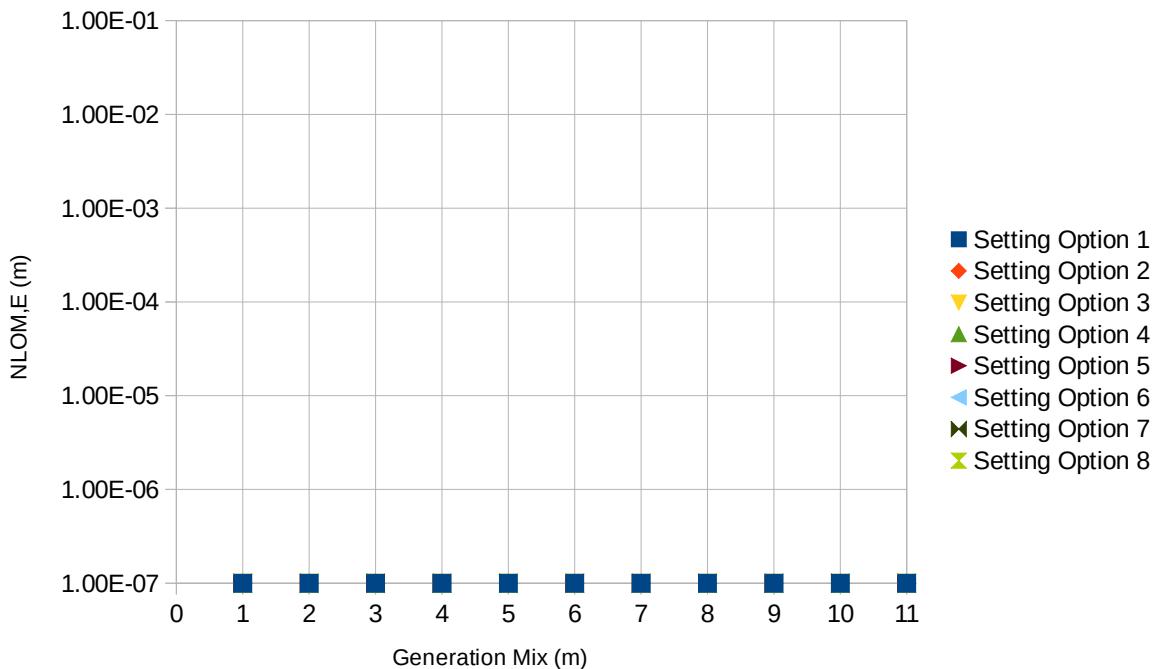


**Figure 22. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 3, Load Profile LP05**

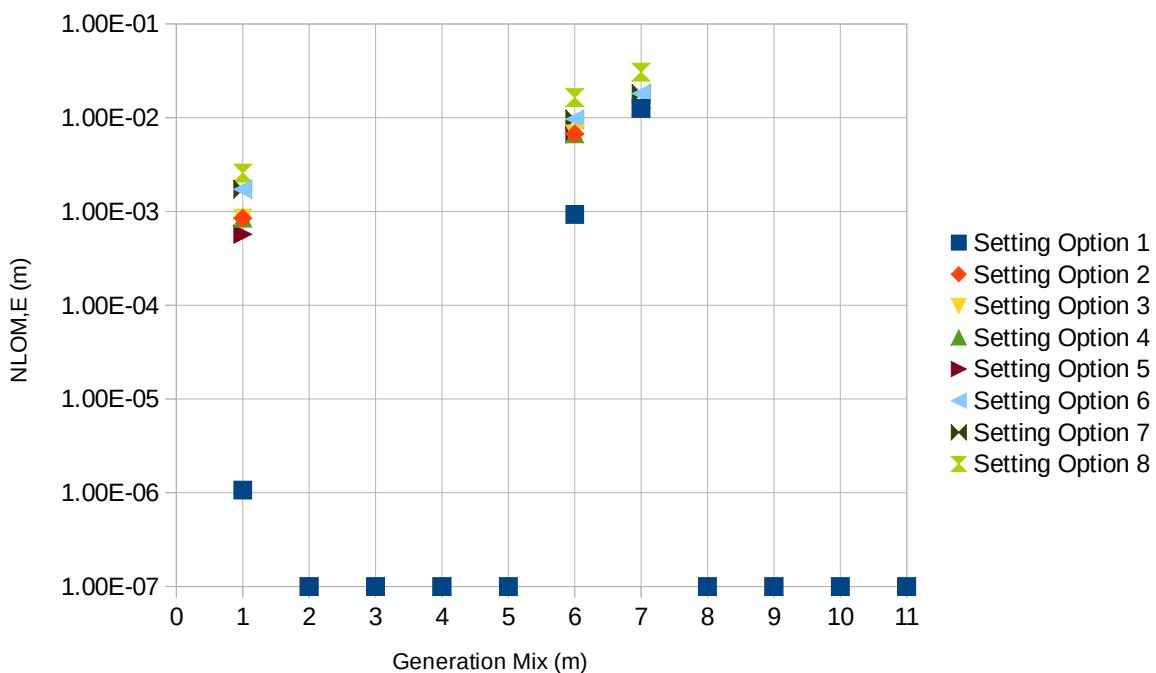


**Figure 23. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 4, Load Profile LP06**

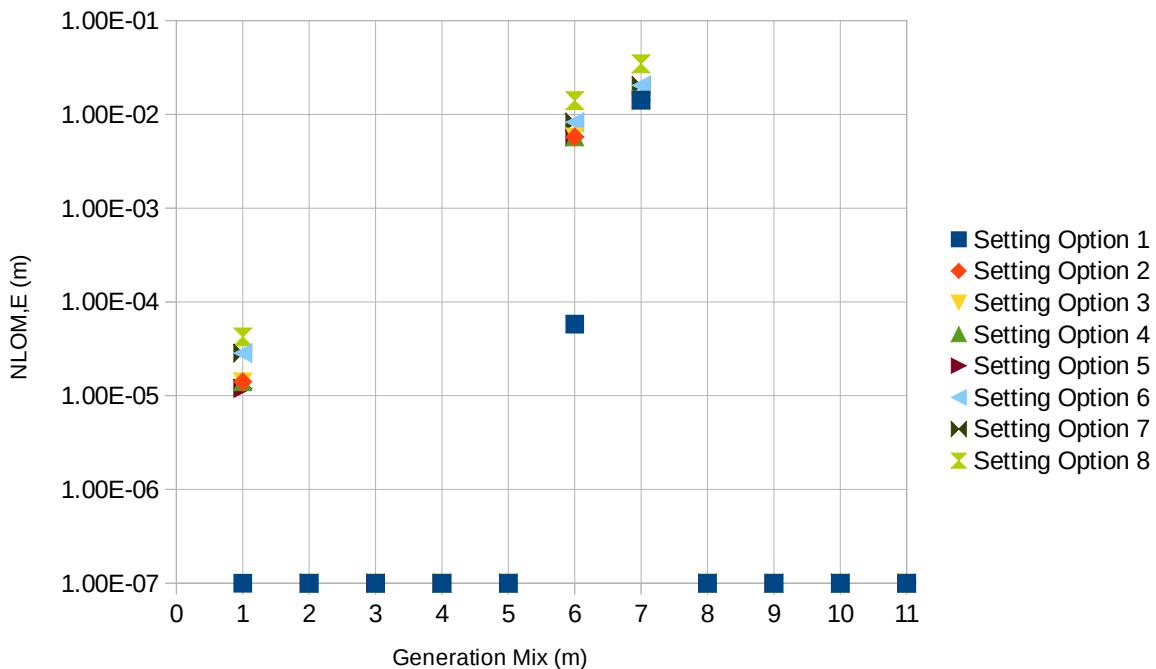


**Figure 24. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 4, Load Profile LP07**

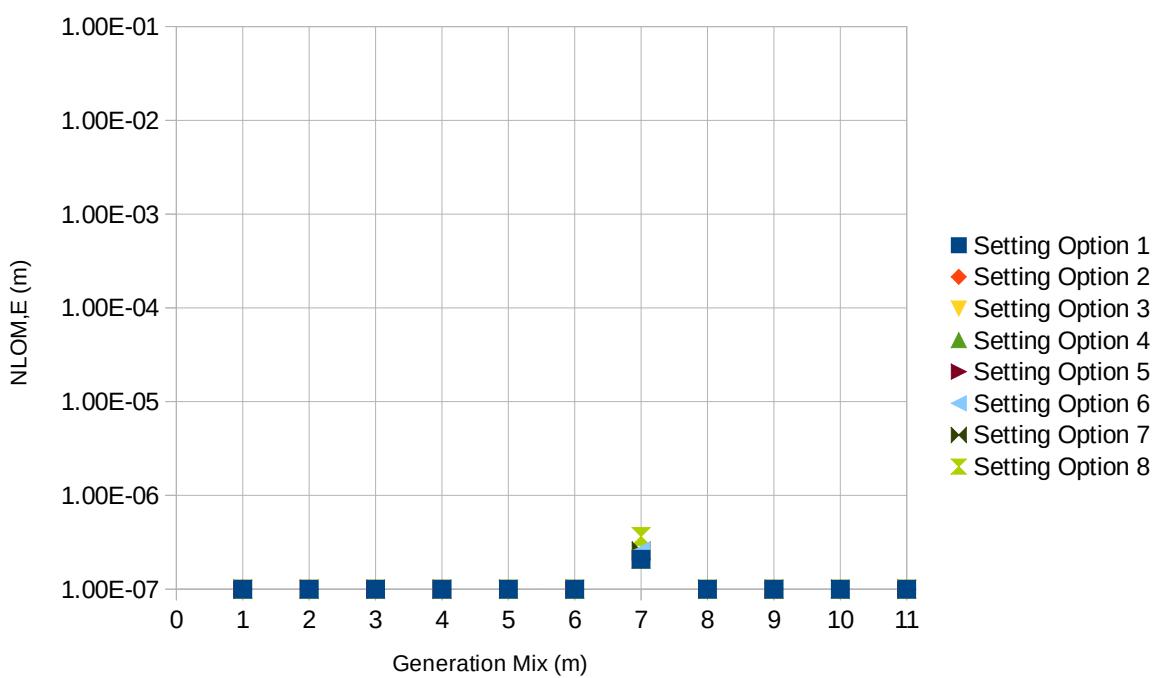

**Figure 25. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 4, Load Profile LP08**

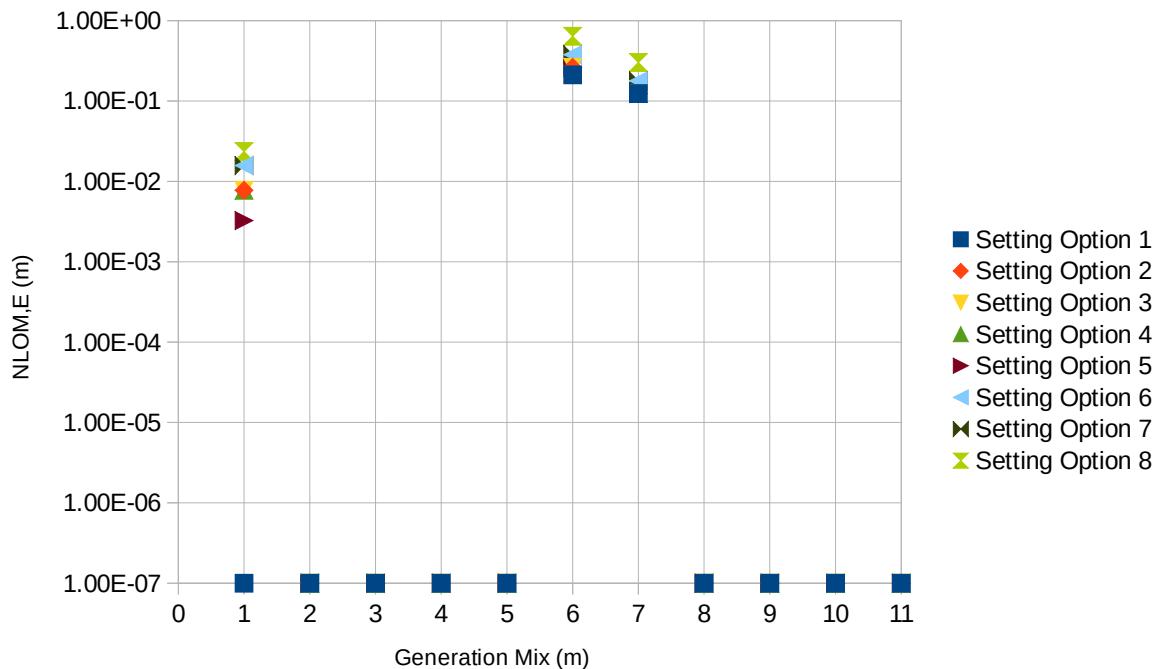

**Figure 26. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 4, Load Profile LP09**

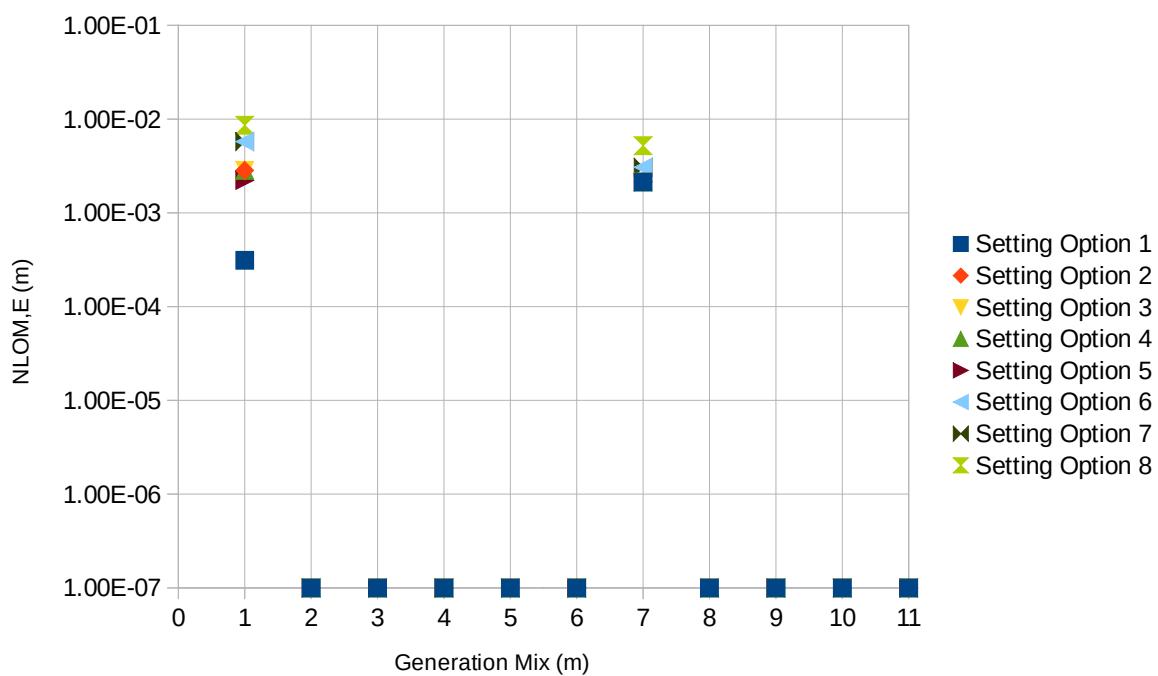

**Figure 27. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 4, Load Profile LP10**

## Appendix D: Full record of risk assessment results (Case Study 3)

### D.1. Summary Results

**Table 70. LOM risk assessment results for islanding scenario 3 (loss of supply to primary substation)**

Load Profile	Setting Option	$T_{NDZavr,s1}$ [min]	$N_{LOM,1DGG,s1}$	$P_{LOM,1DGG,s1}$	$N_{LOM,AR,s1}$	$P_{LOM,E,s1}$	$N_{LOM,E,s1}$
LP01	1	26.58	1.73E-04	1.65E-10	1.28E-02	1.22E-08	5.47E-02
	2	28.71	1.86E-04	1.77E-10	1.37E-02	1.31E-08	5.90E-02
	3	28.71	1.86E-04	1.77E-10	1.37E-02	1.31E-08	5.90E-02
	4	28.71	1.86E-04	1.77E-10	1.37E-02	1.31E-08	5.90E-02
	5	28.63	1.85E-04	1.76E-10	1.37E-02	1.30E-08	5.88E-02
	6	16.26	9.59E-05	9.12E-11	1.98E-02	1.89E-08	8.57E-02
	7	16.26	9.59E-05	9.12E-11	1.98E-02	1.89E-08	8.57E-02
	8	19.54	1.20E-04	1.14E-10	3.36E-02	3.19E-08	1.45E-01
LP02	1	18.58	2.34E-05	2.23E-11	1.73E-03	1.65E-09	1.04E-02
	2	19.37	6.64E-05	6.31E-11	4.91E-03	4.67E-09	2.58E-02
	3	19.37	6.64E-05	6.31E-11	4.91E-03	4.67E-09	2.58E-02
	4	19.37	6.64E-05	6.31E-11	4.91E-03	4.67E-09	2.58E-02
	5	19.28	6.63E-05	6.30E-11	4.90E-03	4.66E-09	2.57E-02
	6	11.17	3.42E-05	3.25E-11	7.07E-03	6.73E-09	3.73E-02
	7	11.17	3.42E-05	3.25E-11	7.07E-03	6.73E-09	3.73E-02
	8	13.33	4.26E-05	4.06E-11	1.20E-02	1.14E-08	6.32E-02
LP03	1	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
LP04	1	29.43	1.04E-05	9.85E-12	7.66E-04	7.29E-10	2.57E-03
	2	39.90	1.18E-05	1.12E-11	8.71E-04	8.29E-10	3.09E-03
	3	39.90	1.18E-05	1.12E-11	8.71E-04	8.29E-10	3.09E-03
	4	39.90	1.18E-05	1.12E-11	8.71E-04	8.29E-10	3.09E-03
	5	39.90	1.18E-05	1.12E-11	8.71E-04	8.29E-10	3.09E-03
	6	20.49	6.05E-06	5.75E-12	1.25E-03	1.19E-09	4.44E-03
	7	20.49	6.05E-06	5.75E-12	1.25E-03	1.19E-09	4.44E-03
	8	25.60	7.56E-06	7.19E-12	2.12E-03	2.02E-09	7.53E-03
LP05	1	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 71. LOM risk assessment results for islanding scenario 4 (loss of individual 11kV or 6.6kV feeder)**

<b>Load Profile</b>	<b>Setting Option</b>	$T_{NDZavr,s2}$ [min]	$N_{LOM,1DGG,s2}$	$P_{LOM,1DGG,s2}$	$N_{LOM,AR,s2}$	$P_{LOM,E,s2}$	$N_{LOM,E,s2}$
LP06	1	13.91	1.38E-05	1.31E-11	1.02E-03	9.69E-10	1.26E-02
	2	22.63	1.94E-05	1.85E-11	1.44E-03	1.37E-09	1.87E-02
	3	22.63	1.94E-05	1.85E-11	1.44E-03	1.37E-09	1.87E-02
	4	22.63	1.94E-05	1.85E-11	1.44E-03	1.37E-09	1.87E-02
	5	21.94	1.94E-05	1.84E-11	1.43E-03	1.36E-09	1.85E-02
	6	12.83	1.00E-05	9.56E-12	2.08E-03	1.98E-09	2.74E-02
	7	12.83	1.00E-05	9.56E-12	2.08E-03	1.98E-09	2.74E-02
	8	15.41	1.25E-05	1.19E-11	3.52E-03	3.35E-09	4.61E-02
LP07	1	16.40	2.15E-05	2.05E-11	1.59E-03	1.51E-09	1.29E-02
	2	19.50	2.89E-05	2.75E-11	2.14E-03	2.03E-09	1.81E-02
	3	19.50	2.89E-05	2.75E-11	2.14E-03	2.03E-09	1.81E-02
	4	19.50	2.89E-05	2.75E-11	2.14E-03	2.03E-09	1.81E-02
	5	19.50	2.89E-05	2.75E-11	2.14E-03	2.03E-09	1.81E-02
	6	10.01	1.48E-05	1.41E-11	3.07E-03	2.92E-09	2.60E-02
	7	10.01	1.48E-05	1.41E-11	3.07E-03	2.92E-09	2.60E-02
	8	12.51	1.85E-05	1.76E-11	5.21E-03	4.95E-09	4.41E-02
LP08	1	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.08E-07
	2	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.08E-07
	3	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.08E-07
	4	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.08E-07
	5	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.08E-07
	6	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.56E-07
	7	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.56E-07
	8	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.64E-07
LP09	1	82.00	4.72E-04	4.49E-10	3.49E-02	3.32E-08	2.97E-01
	2	118.84	5.41E-04	5.14E-10	4.00E-02	3.80E-08	3.50E-01
	3	118.84	5.41E-04	5.14E-10	4.00E-02	3.80E-08	3.50E-01
	4	118.84	5.41E-04	5.14E-10	4.00E-02	3.80E-08	3.50E-01
	5	115.75	5.37E-04	5.11E-10	3.97E-02	3.78E-08	3.46E-01
	6	67.85	2.79E-04	2.65E-10	5.77E-02	5.49E-08	5.06E-01
	7	67.85	2.79E-04	2.65E-10	5.77E-02	5.49E-08	5.06E-01
	8	81.27	3.48E-04	3.31E-10	9.77E-02	9.30E-08	8.56E-01
LP10	1	11.21	2.03E-06	1.93E-12	1.50E-04	1.43E-10	2.23E-03
	2	19.40	2.06E-06	1.96E-12	1.52E-04	1.45E-10	4.73E-03
	3	19.40	2.06E-06	1.96E-12	1.52E-04	1.45E-10	4.73E-03
	4	19.40	2.06E-06	1.96E-12	1.52E-04	1.45E-10	4.73E-03
	5	19.25	2.06E-06	1.96E-12	1.52E-04	1.45E-10	4.12E-03
	6	11.58	1.06E-06	1.01E-12	2.20E-04	2.09E-10	8.46E-03
	7	11.58	1.06E-06	1.01E-12	2.20E-04	2.09E-10	8.46E-03
	8	13.64	1.32E-06	1.26E-12	3.72E-04	3.54E-10	1.32E-02

**Table 72. Summary LOM risk assessment results – based on maximum load profile figures**

<b>LOM Scenario</b>	<b>Setting Option</b>	$T_{NDZavr}$ [min]	$N_{LOM,1DGG}$	$P_{LOM,1DGG}$	$N_{LOM,AR}$	$P_{LOM,E}$	$N_{LOM,E}$
S3	1	29.4	1.73E-04	1.65E-10	1.28E-02	1.22E-08	5.47E-02
	2	39.9	1.86E-04	1.77E-10	1.37E-02	1.31E-08	5.90E-02
	3	39.9	1.86E-04	1.77E-10	1.37E-02	1.31E-08	5.90E-02
	4	39.9	1.86E-04	1.77E-10	1.37E-02	1.31E-08	5.90E-02
	5	39.9	1.85E-04	1.76E-10	1.37E-02	1.30E-08	5.88E-02
	6	20.5	9.59E-05	9.12E-11	1.98E-02	1.89E-08	8.57E-02
	7	20.5	9.59E-05	9.12E-11	1.98E-02	1.89E-08	8.57E-02
	8	25.6	1.20E-04	1.14E-10	3.36E-02	3.19E-08	1.45E-01
S4	1	82.00	4.72E-04	4.49E-10	3.49E-02	3.32E-08	2.97E-01
	2	118.84	5.41E-04	5.14E-10	4.00E-02	3.80E-08	3.50E-01
	3	118.84	5.41E-04	5.14E-10	4.00E-02	3.80E-08	3.50E-01
	4	118.84	5.41E-04	5.14E-10	4.00E-02	3.80E-08	3.50E-01
	5	115.75	5.37E-04	5.11E-10	3.97E-02	3.78E-08	3.46E-01
	6	67.85	2.79E-04	2.65E-10	5.77E-02	5.49E-08	5.06E-01
	7	67.85	2.79E-04	2.65E-10	5.77E-02	5.49E-08	5.06E-01
	8	81.27	3.48E-04	3.31E-10	9.77E-02	9.30E-08	8.56E-01
Combined S3 & S4	1	55.72	3.22E-04	3.07E-10	4.77E-02	4.54E-08	3.52E-01
	2	79.37	3.63E-04	3.45E-10	5.37E-02	5.11E-08	4.09E-01
	3	79.37	3.63E-04	3.45E-10	5.37E-02	5.11E-08	4.09E-01
	4	79.37	3.63E-04	3.45E-10	5.37E-02	5.11E-08	4.09E-01
	5	77.83	3.61E-04	3.43E-10	5.34E-02	5.08E-08	4.05E-01
	6	44.17	1.87E-04	1.78E-10	7.76E-02	7.38E-08	5.92E-01
	7	44.17	1.87E-04	1.78E-10	7.76E-02	7.38E-08	5.92E-01
	8	53.44	2.34E-04	2.22E-10	1.31E-01	1.25E-07	1.00E+00

**Table 73. Summary LOM risk assessment results – based on average load profile figures**

<b>LOM Scenario</b>	<b>Setting Option</b>	$T_{NDZavr}$ [min]	$N_{LOM,1DGG}$	$P_{LOM,1DGG}$	$N_{LOM,AR}$	$P_{LOM,E}$	$N_{LOM,E}$
S3	1	14.92	4.14E-05	3.94E-11	3.07E-03	2.92E-09	1.35E-02
	2	17.60	5.28E-05	5.02E-11	3.90E-03	3.71E-09	1.76E-02
	3	17.60	5.28E-05	5.02E-11	3.90E-03	3.71E-09	1.76E-02
	4	17.60	5.28E-05	5.02E-11	3.90E-03	3.71E-09	1.76E-02
	5	17.56	5.27E-05	5.01E-11	3.90E-03	3.71E-09	1.75E-02
	6	9.58	2.72E-05	2.59E-11	5.63E-03	5.36E-09	2.55E-02
	7	9.58	2.72E-05	2.59E-11	5.63E-03	5.36E-09	2.55E-02
	8	11.69	3.39E-05	3.23E-11	9.54E-03	9.07E-09	4.31E-02
S4	1	24.71	1.02E-04	9.68E-11	7.53E-03	7.16E-09	6.50E-02
	2	36.07	1.18E-04	1.12E-10	8.74E-03	8.32E-09	7.83E-02
	3	36.07	1.18E-04	1.12E-10	8.74E-03	8.32E-09	7.83E-02
	4	36.07	1.18E-04	1.12E-10	8.74E-03	8.32E-09	7.83E-02
	5	35.29	1.17E-04	1.12E-10	8.69E-03	8.26E-09	7.74E-02
	6	20.46	6.10E-05	5.80E-11	1.26E-02	1.20E-08	1.14E-01
	7	20.46	6.10E-05	5.80E-11	1.26E-02	1.20E-08	1.14E-01
	8	24.57	7.60E-05	7.23E-11	2.14E-02	2.03E-08	1.92E-01
Combined S3 & S4	1	19.81	7.16E-05	6.81E-11	1.06E-02	1.01E-08	7.85E-02
	2	26.83	8.55E-05	8.13E-11	1.26E-02	1.20E-08	9.59E-02
	3	26.83	8.55E-05	8.13E-11	1.26E-02	1.20E-08	9.59E-02
	4	26.83	8.55E-05	8.13E-11	1.26E-02	1.20E-08	9.59E-02
	5	26.42	8.50E-05	8.09E-11	1.26E-02	1.20E-08	9.49E-02
	6	15.02	4.41E-05	4.19E-11	1.83E-02	1.74E-08	1.39E-01
	7	15.02	4.41E-05	4.19E-11	1.83E-02	1.74E-08	1.39E-01
	8	18.13	5.50E-05	5.23E-11	3.09E-02	2.94E-08	2.35E-01

## D.2. Detailed results for different generation mixes and load profiles

**Table 74. LOM risk assessment results (islanding scenario 3, load profile LP01)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
1	1	54.96	5.96E-06	5.67E-12	5.50E-05	5.24E-11	5.03E-04
	2	57.39	2.19E-05	2.08E-11	2.02E-04	1.92E-10	1.44E-03
	3	57.39	2.19E-05	2.08E-11	2.02E-04	1.92E-10	1.44E-03
	4	57.39	2.19E-05	2.08E-11	2.02E-04	1.92E-10	1.44E-03
	5	56.75	1.92E-05	1.83E-11	1.78E-04	1.69E-10	1.20E-03
	6	57.39	2.19E-05	2.08E-11	4.10E-04	3.90E-10	2.93E-03
	7	57.39	2.19E-05	2.08E-11	4.10E-04	3.90E-10	2.93E-03
	8	57.39	2.19E-05	2.08E-11	6.13E-04	5.83E-10	4.38E-03
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	86.53	4.71E-04	4.48E-10	3.09E-03	2.94E-09	1.47E-02
	2	107.11	5.86E-04	5.58E-10	3.85E-03	3.66E-09	1.81E-02
	3	107.11	5.86E-04	5.58E-10	3.85E-03	3.66E-09	1.81E-02
	4	107.11	5.86E-04	5.58E-10	3.85E-03	3.66E-09	1.81E-02
	5	107.11	5.86E-04	5.58E-10	3.85E-03	3.66E-09	1.81E-02
	6	107.11	5.86E-04	5.58E-10	5.53E-03	5.26E-09	2.60E-02
	7	107.11	5.86E-04	5.58E-10	5.53E-03	5.26E-09	2.60E-02
	8	107.11	5.86E-04	5.58E-10	9.38E-03	8.92E-09	4.42E-02

<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	309.89	3.37E-03	3.21E-09	9.68E-03	9.21E-09	3.95E-02
	2	309.89	3.37E-03	3.21E-09	9.68E-03	9.21E-09	3.95E-02
	3	309.89	3.37E-03	3.21E-09	9.68E-03	9.21E-09	3.95E-02
	4	309.89	3.37E-03	3.21E-09	9.68E-03	9.21E-09	3.95E-02
	5	309.89	3.37E-03	3.21E-09	9.68E-03	9.21E-09	3.95E-02
	6	309.89	3.37E-03	3.21E-09	1.39E-02	1.32E-08	5.67E-02
	7	309.89	3.37E-03	3.21E-09	1.39E-02	1.32E-08	5.67E-02
	8	309.89	3.37E-03	3.21E-09	2.36E-02	2.24E-08	9.62E-02
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 75. LOM risk assessment results (islanding scenario 3, load profile LP02)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	1	52.00	1.35E-22	1.29E-28	1.25E-21	1.19E-27	9.57E-06
	2	46.20	2.99E-06	2.84E-12	2.76E-05	2.63E-11	3.62E-04
	3	46.20	2.99E-06	2.84E-12	2.76E-05	2.63E-11	3.62E-04
	4	46.20	2.99E-06	2.84E-12	2.76E-05	2.63E-11	3.62E-04
	5	45.45	2.07E-06	1.97E-12	1.92E-05	1.82E-11	2.55E-04
	6	46.20	2.99E-06	2.84E-12	5.61E-05	5.33E-11	7.36E-04
	7	46.20	2.99E-06	2.84E-12	5.61E-05	5.33E-11	7.36E-04
	8	46.20	2.99E-06	2.84E-12	8.37E-05	7.96E-11	1.10E-03
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	78.46	1.21E-04	1.15E-10	7.96E-04	7.58E-10	5.70E-03
	2	95.55	6.01E-04	5.72E-10	3.94E-03	3.75E-09	2.08E-02
	3	95.55	6.01E-04	5.72E-10	3.94E-03	3.75E-09	2.08E-02
	4	95.55	6.01E-04	5.72E-10	3.94E-03	3.75E-09	2.08E-02
	5	95.55	6.01E-04	5.72E-10	3.94E-03	3.75E-09	2.08E-02
	6	95.55	6.01E-04	5.72E-10	5.67E-03	5.39E-09	2.99E-02
	7	95.55	6.01E-04	5.72E-10	5.67E-03	5.39E-09	2.99E-02
	8	95.55	6.01E-04	5.72E-10	9.61E-03	9.14E-09	5.08E-02

Generation Mix ( <i>m</i> )	Setting Option	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	131.96	3.27E-04	3.11E-10	9.38E-04	8.93E-10	4.64E-03
	2	131.96	3.27E-04	3.11E-10	9.38E-04	8.93E-10	4.64E-03
	3	131.96	3.27E-04	3.11E-10	9.38E-04	8.93E-10	4.64E-03
	4	131.96	3.27E-04	3.11E-10	9.38E-04	8.93E-10	4.64E-03
	5	131.96	3.27E-04	3.11E-10	9.38E-04	8.93E-10	4.64E-03
	6	131.96	3.27E-04	3.11E-10	1.35E-03	1.28E-09	6.67E-03
	7	131.96	3.27E-04	3.11E-10	1.35E-03	1.28E-09	6.67E-03
	8	131.96	3.27E-04	3.11E-10	2.29E-03	2.18E-09	1.13E-02
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 76. LOM risk assessment results (islanding scenario 3, load profile LP3)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 77. LOM risk assessment results (islanding scenario 3, load profile LP4)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	118.01	1.61E-05	1.53E-11	1.06E-04	1.00E-10	5.20E-04
	3	118.01	1.61E-05	1.53E-11	1.06E-04	1.00E-10	5.20E-04
	4	118.01	1.61E-05	1.53E-11	1.06E-04	1.00E-10	5.20E-04
	5	118.01	1.61E-05	1.53E-11	1.06E-04	1.00E-10	5.20E-04
	6	118.01	1.61E-05	1.53E-11	1.52E-04	1.44E-10	7.47E-04
	7	118.01	1.61E-05	1.53E-11	1.52E-04	1.44E-10	7.47E-04
	8	118.01	1.61E-05	1.53E-11	2.57E-04	2.45E-10	1.27E-03

Generation Mix (m)	Setting Option	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	757.86	2.67E-04	2.54E-10	7.66E-04	7.29E-10	2.57E-03
	2	757.86	2.67E-04	2.54E-10	7.66E-04	7.29E-10	2.57E-03
	3	757.86	2.67E-04	2.54E-10	7.66E-04	7.29E-10	2.57E-03
	4	757.86	2.67E-04	2.54E-10	7.66E-04	7.29E-10	2.57E-03
	5	757.86	2.67E-04	2.54E-10	7.66E-04	7.29E-10	2.57E-03
	6	757.86	2.67E-04	2.54E-10	1.10E-03	1.05E-09	3.69E-03
	7	757.86	2.67E-04	2.54E-10	1.10E-03	1.05E-09	3.69E-03
	8	757.86	2.67E-04	2.54E-10	1.87E-03	1.78E-09	6.26E-03
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 78. LOM risk assessment results (islanding scenario 3, load profile LP5)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 79. LOM risk assessment results (islanding scenario 4, load profile LP06)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	9.67E-07
	2	45.74	2.92E-06	2.78E-12	2.70E-05	2.57E-11	7.70E-04
	3	45.74	2.92E-06	2.78E-12	2.70E-05	2.57E-11	7.70E-04
	4	45.74	2.92E-06	2.78E-12	2.70E-05	2.57E-11	7.70E-04
	5	40.18	2.54E-06	2.42E-12	2.35E-05	2.23E-11	5.23E-04
	6	45.74	2.92E-06	2.78E-12	5.48E-05	5.21E-11	1.56E-03
	7	45.74	2.92E-06	2.78E-12	5.48E-05	5.21E-11	1.56E-03
	8	45.74	2.92E-06	2.78E-12	8.17E-05	7.78E-11	2.33E-03
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	78.69	1.09E-05	1.04E-11	7.54E-05	7.17E-11	8.66E-04
	2	111.03	6.77E-05	6.44E-11	4.66E-04	4.44E-10	6.21E-03
	3	111.03	6.77E-05	6.44E-11	4.66E-04	4.44E-10	6.21E-03
	4	111.03	6.77E-05	6.44E-11	4.66E-04	4.44E-10	6.21E-03
	5	111.03	6.77E-05	6.44E-11	4.66E-04	4.44E-10	6.21E-03
	6	111.03	6.77E-05	6.44E-11	6.70E-04	6.37E-10	8.93E-03
	7	111.03	6.77E-05	6.44E-11	6.70E-04	6.37E-10	8.93E-03
	8	111.03	6.77E-05	6.44E-11	1.14E-03	1.08E-09	1.51E-02

Generation Mix (m)	Setting Option	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	190.86	3.70E-04	3.52E-10	9.44E-04	8.98E-10	1.17E-02
	2	190.86	3.70E-04	3.52E-10	9.44E-04	8.98E-10	1.17E-02
	3	190.86	3.70E-04	3.52E-10	9.44E-04	8.98E-10	1.17E-02
	4	190.86	3.70E-04	3.52E-10	9.44E-04	8.98E-10	1.17E-02
	5	190.86	3.70E-04	3.52E-10	9.44E-04	8.98E-10	1.17E-02
	6	190.86	3.70E-04	3.52E-10	1.36E-03	1.29E-09	1.69E-02
	7	190.86	3.70E-04	3.52E-10	1.36E-03	1.29E-09	1.69E-02
	8	190.86	3.70E-04	3.52E-10	2.30E-03	2.19E-09	2.86E-02
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 80. LOM risk assessment results (islanding scenario 4, load profile LP07)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.31E-05
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.31E-05
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.31E-05
	5	0.00	1.13E-22	-1.06E-28	1.05E-21	0.00E+00	1.20E-05
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	2.66E-05
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	2.66E-05
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	3.97E-05
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	80.67	3.26E-07	3.10E-13	2.24E-06	2.13E-12	4.45E-05
	2	113.96	7.93E-05	7.54E-11	5.46E-04	5.20E-10	5.22E-03
	3	113.96	7.93E-05	7.54E-11	5.46E-04	5.20E-10	5.22E-03
	4	113.96	7.93E-05	7.54E-11	5.46E-04	5.20E-10	5.22E-03
	5	113.96	7.93E-05	7.54E-11	5.46E-04	5.20E-10	5.22E-03
	6	113.96	7.93E-05	7.54E-11	7.85E-04	7.46E-10	7.50E-03
	7	113.96	7.93E-05	7.54E-11	7.85E-04	7.46E-10	7.50E-03
	8	113.96	7.93E-05	7.54E-11	1.33E-03	1.27E-09	1.27E-02

Generation Mix (m)	Setting Option	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	257.95	6.23E-04	5.93E-10	1.59E-03	1.51E-09	1.29E-02
	2	257.95	6.23E-04	5.93E-10	1.59E-03	1.51E-09	1.29E-02
	3	257.95	6.23E-04	5.93E-10	1.59E-03	1.51E-09	1.29E-02
	4	257.95	6.23E-04	5.93E-10	1.59E-03	1.51E-09	1.29E-02
	5	257.95	6.23E-04	5.93E-10	1.59E-03	1.51E-09	1.29E-02
	6	257.95	6.23E-04	5.93E-10	2.28E-03	2.17E-09	1.85E-02
	7	257.95	6.23E-04	5.93E-10	2.28E-03	2.17E-09	1.85E-02
	8	257.95	6.23E-04	5.93E-10	3.88E-03	3.69E-09	3.13E-02
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 81. LOM risk assessment results (islanding scenario 4, load profile LP8)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

<b>Generation Mix (m)</b>	<b>Setting Option</b>	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.08E-07
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.08E-07
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.08E-07
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.08E-07
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.08E-07
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.56E-07
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	1.56E-07
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	2.64E-07
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 82. LOM risk assessment results (islanding scenario 4, load profile LP9)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	257.91	5.03E-05	4.79E-11	4.65E-04	4.42E-10	6.10E-03
	3	257.91	5.03E-05	4.79E-11	4.65E-04	4.42E-10	6.10E-03
	4	257.91	5.03E-05	4.79E-11	4.65E-04	4.42E-10	6.10E-03
	5	233.23	1.96E-05	1.86E-11	1.81E-04	1.72E-10	2.70E-03
	6	257.91	5.03E-05	4.79E-11	9.44E-04	8.98E-10	1.24E-02
	7	257.91	5.03E-05	4.79E-11	9.44E-04	8.98E-10	1.24E-02
	8	257.91	5.03E-05	4.79E-11	1.41E-03	1.34E-09	1.85E-02
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	573.67	3.12E-03	2.97E-09	2.15E-02	2.05E-08	1.87E-01
	2	623.30	3.80E-03	3.61E-09	2.61E-02	2.49E-08	2.33E-01
	3	623.30	3.80E-03	3.61E-09	2.61E-02	2.49E-08	2.33E-01
	4	623.30	3.80E-03	3.61E-09	2.61E-02	2.49E-08	2.33E-01
	5	623.30	3.80E-03	3.61E-09	2.61E-02	2.49E-08	2.33E-01
	6	623.30	3.80E-03	3.61E-09	3.76E-02	3.57E-08	3.35E-01
	7	623.30	3.80E-03	3.61E-09	3.76E-02	3.57E-08	3.35E-01
	8	623.30	3.80E-03	3.61E-09	6.37E-02	6.06E-08	5.69E-01

Generation Mix ( <i>m</i> )	Setting Option	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	829.32	5.24E-03	4.99E-09	1.34E-02	1.27E-08	1.10E-01
	2	829.32	5.24E-03	4.99E-09	1.34E-02	1.27E-08	1.10E-01
	3	829.32	5.24E-03	4.99E-09	1.34E-02	1.27E-08	1.10E-01
	4	829.32	5.24E-03	4.99E-09	1.34E-02	1.27E-08	1.10E-01
	5	829.32	5.24E-03	4.99E-09	1.34E-02	1.27E-08	1.10E-01
	6	829.32	5.24E-03	4.99E-09	1.92E-02	1.83E-08	1.58E-01
	7	829.32	5.24E-03	4.99E-09	1.92E-02	1.83E-08	1.58E-01
	8	829.32	5.24E-03	4.99E-09	3.26E-02	3.10E-08	2.69E-01
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 83. LOM risk assessment results (islanding scenario 4, load profile LP10)**

<b>Generation Mix (m)</b>	<b>Setting Option</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	3.12E-04
	2	61.22	2.18E-07	2.07E-13	2.01E-06	1.92E-12	2.81E-03
	3	61.22	2.18E-07	2.07E-13	2.01E-06	1.92E-12	2.81E-03
	4	61.22	2.18E-07	2.07E-13	2.01E-06	1.92E-12	2.81E-03
	5	60.00	2.13E-07	2.02E-13	1.97E-06	1.87E-12	2.20E-03
	6	61.22	2.18E-07	2.07E-13	4.09E-06	3.89E-12	5.71E-03
	7	61.22	2.18E-07	2.07E-13	4.09E-06	3.89E-12	5.71E-03
	8	61.22	2.18E-07	2.07E-13	6.10E-06	5.80E-12	8.52E-03
2	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	1	52.55	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	58.38	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	58.38	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	58.38	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	58.38	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	58.38	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	58.38	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	58.38	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Generation Mix (m)	Setting Option	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
7	1	183.25	5.89E-05	5.60E-11	1.50E-04	1.43E-10	1.92E-03
	2	183.25	5.89E-05	5.60E-11	1.50E-04	1.43E-10	1.92E-03
	3	183.25	5.89E-05	5.60E-11	1.50E-04	1.43E-10	1.92E-03
	4	183.25	5.89E-05	5.60E-11	1.50E-04	1.43E-10	1.92E-03
	5	183.25	5.89E-05	5.60E-11	1.50E-04	1.43E-10	1.92E-03
	6	183.25	5.89E-05	5.60E-11	2.16E-04	2.05E-10	2.75E-03
	7	183.25	5.89E-05	5.60E-11	2.16E-04	2.05E-10	2.75E-03
	8	183.25	5.89E-05	5.60E-11	3.66E-04	3.48E-10	4.67E-03
8	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
	8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

### D.3. Result figures

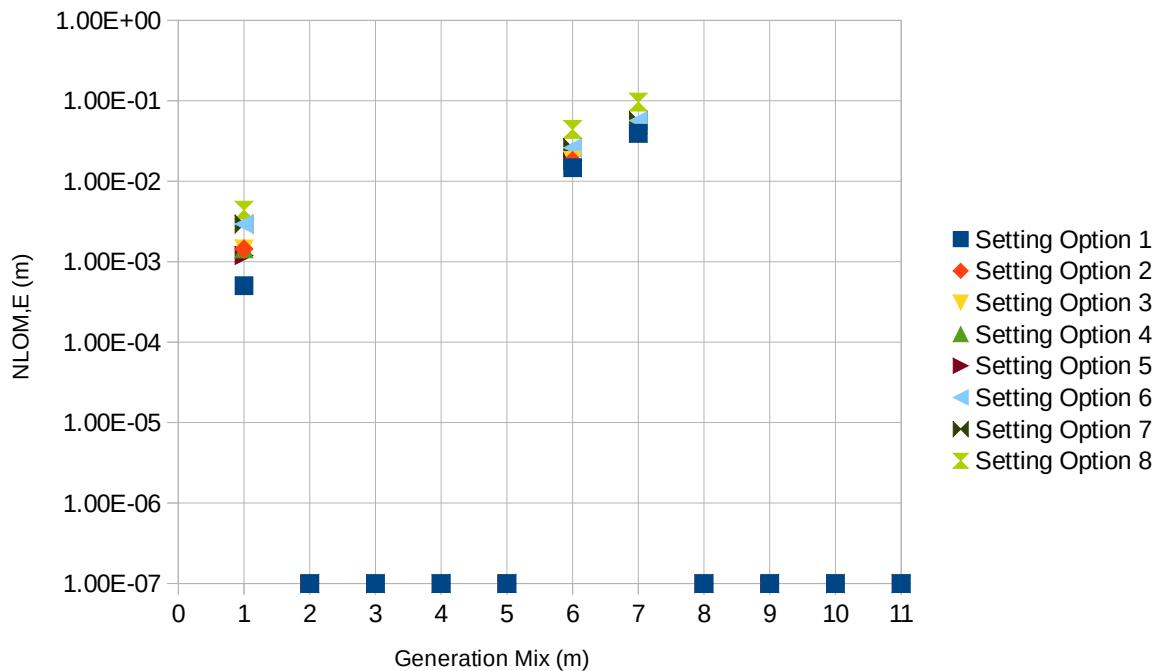


Figure 28. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 3, Load Profile LP01



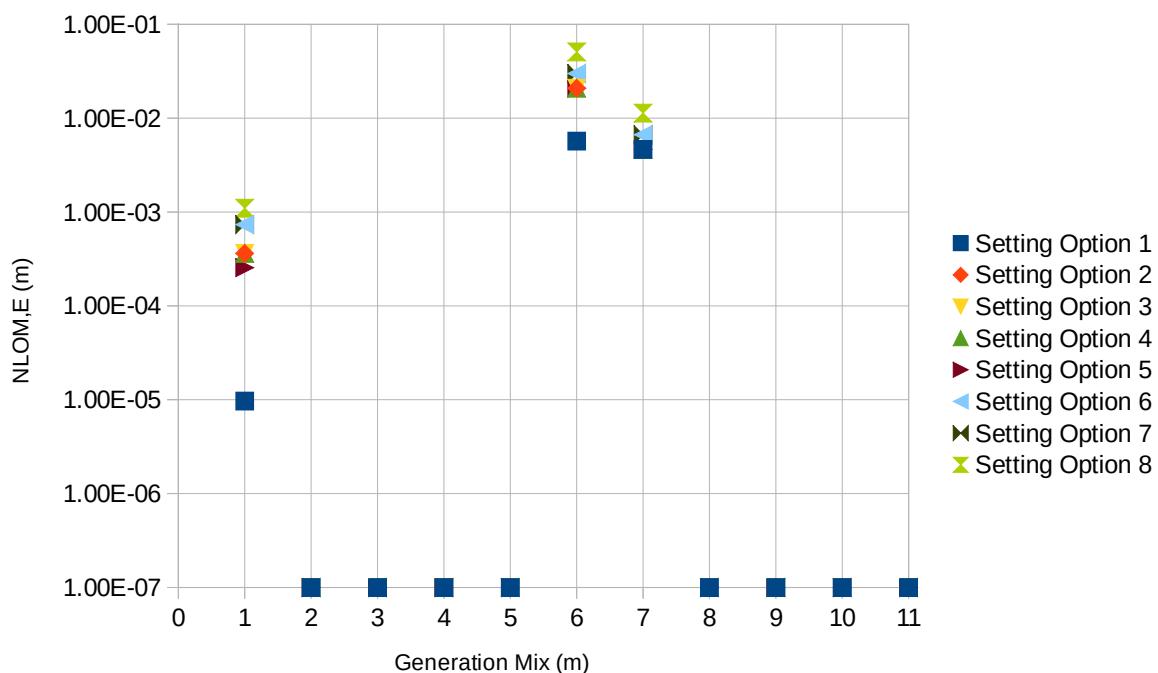



Figure 29. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 3, Load Profile LP02

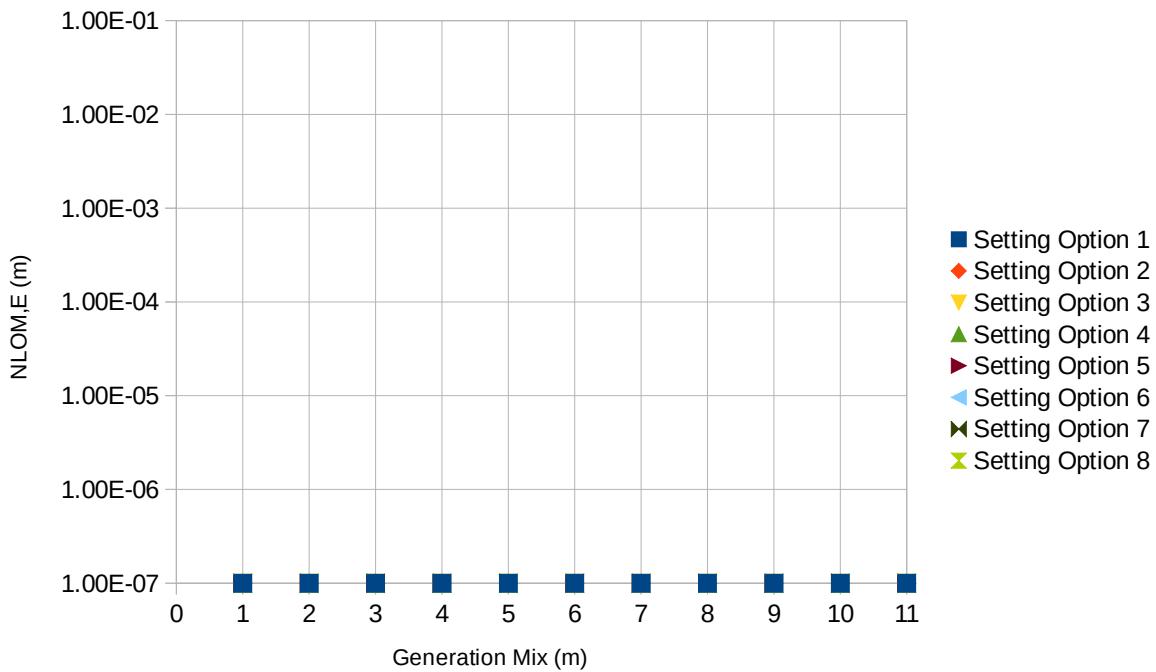


**Figure 30. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 3, Load Profile LP03**

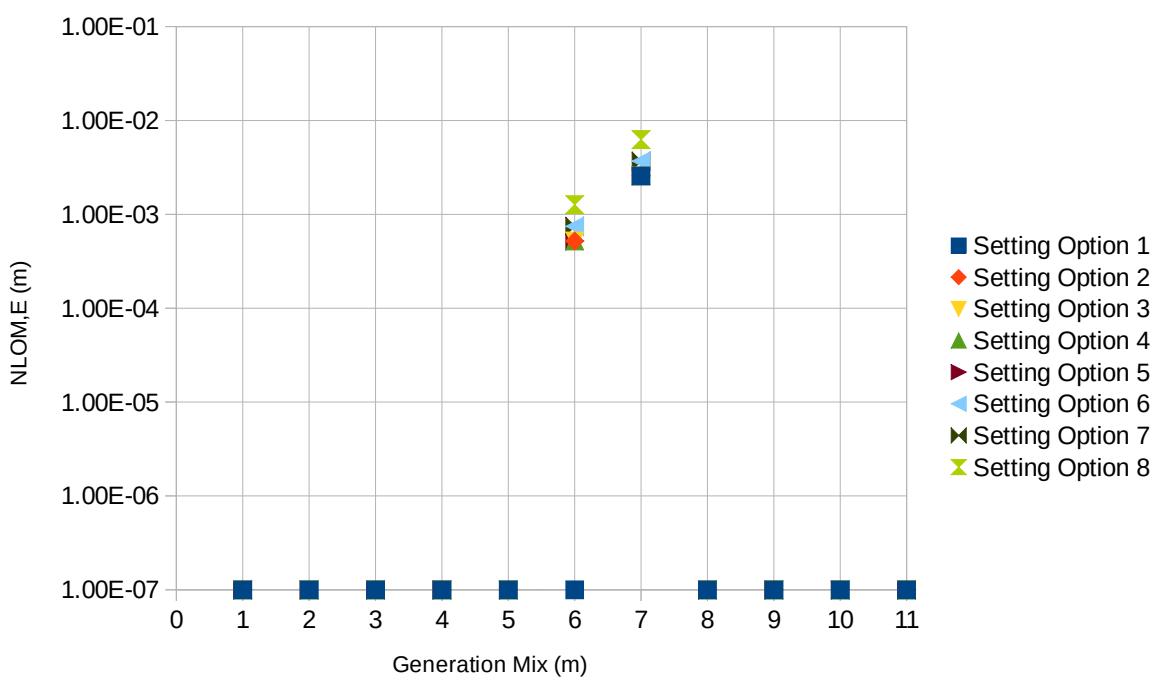


**Figure 31. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 3, Load Profile LP04**

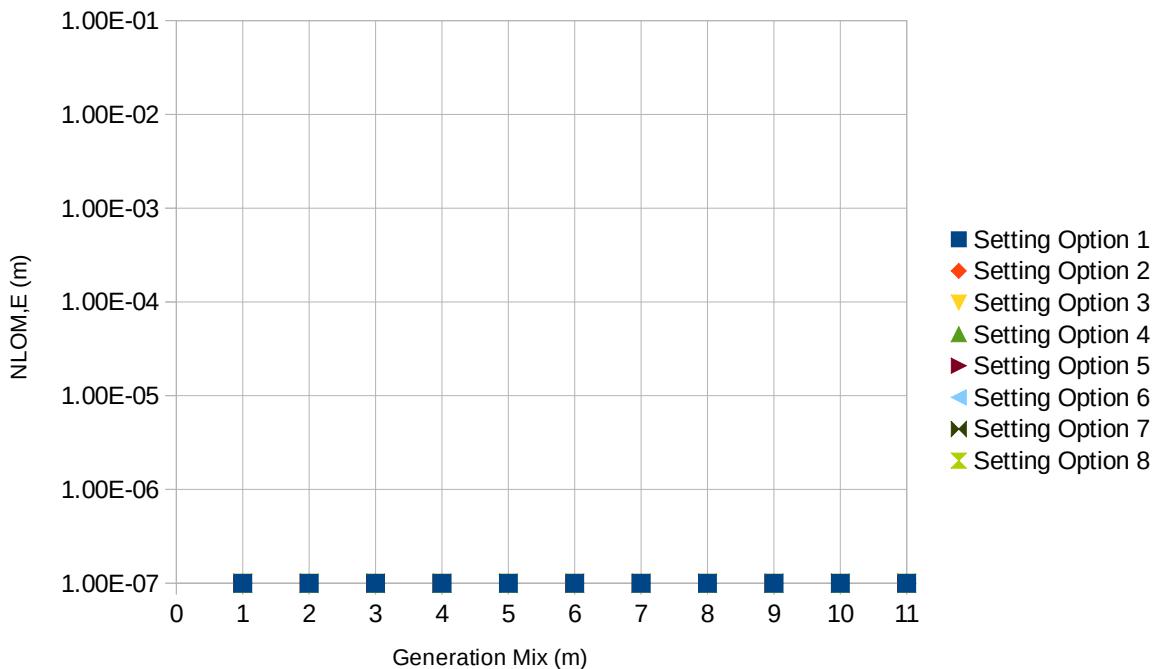


**Figure 32. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 3, Load Profile LP05**

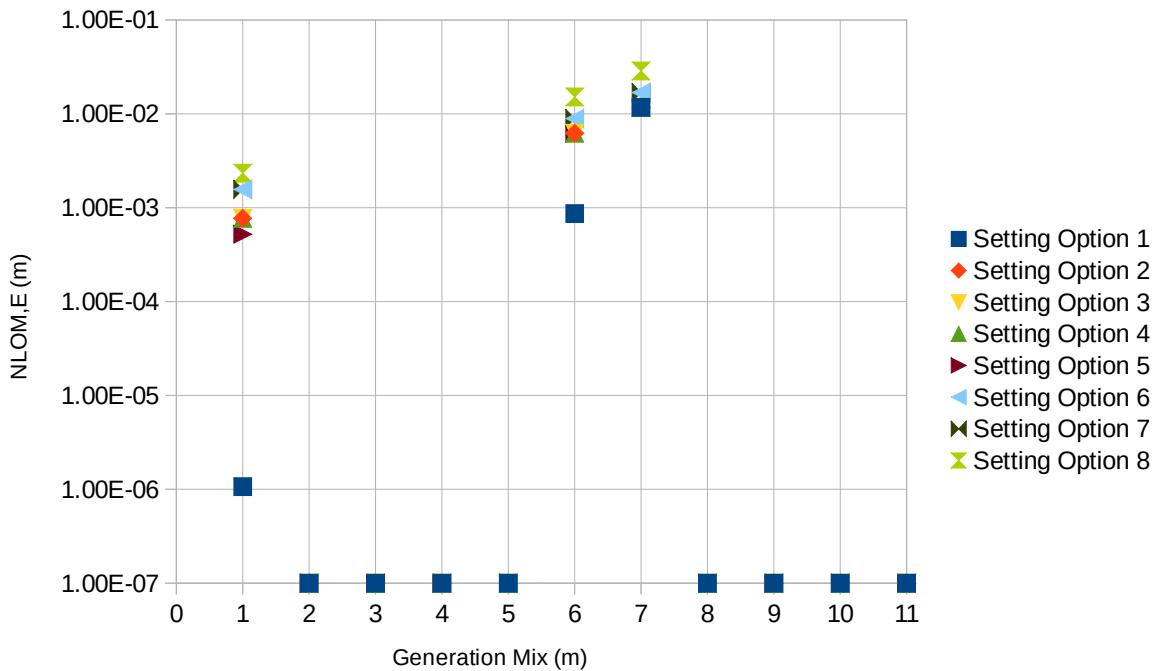


**Figure 33. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 4, Load Profile LP06**

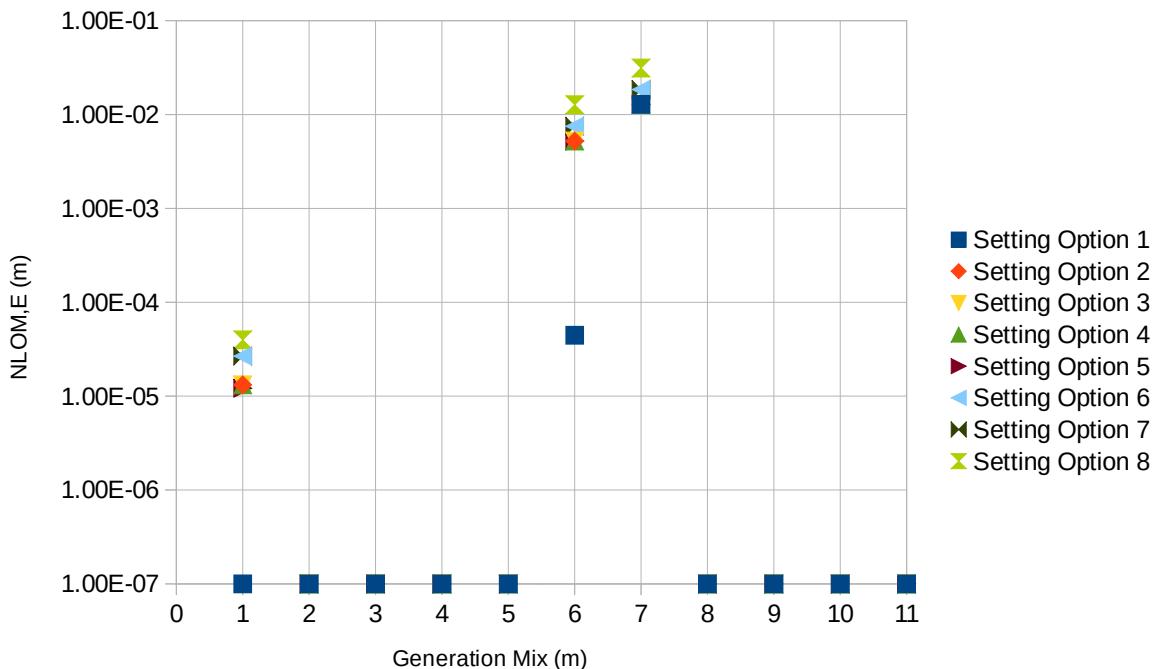


**Figure 34. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 4, Load Profile LP07**

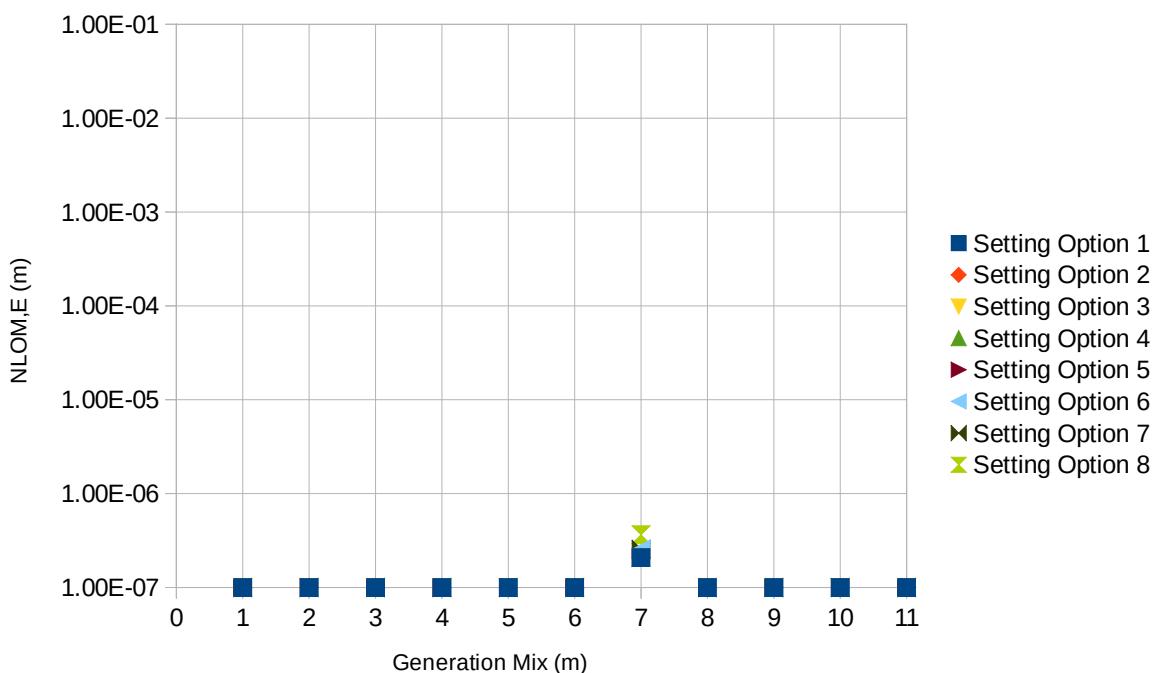

**Figure 35. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 4, Load Profile LP08**

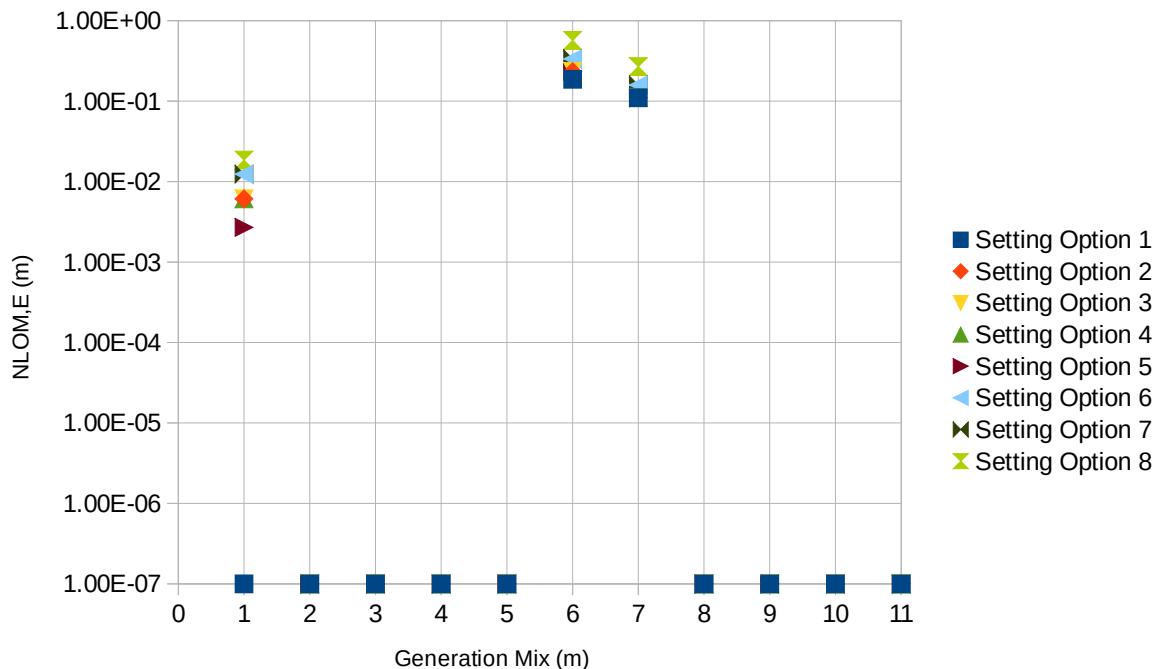

**Figure 36. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 4, Load Profile LP09**

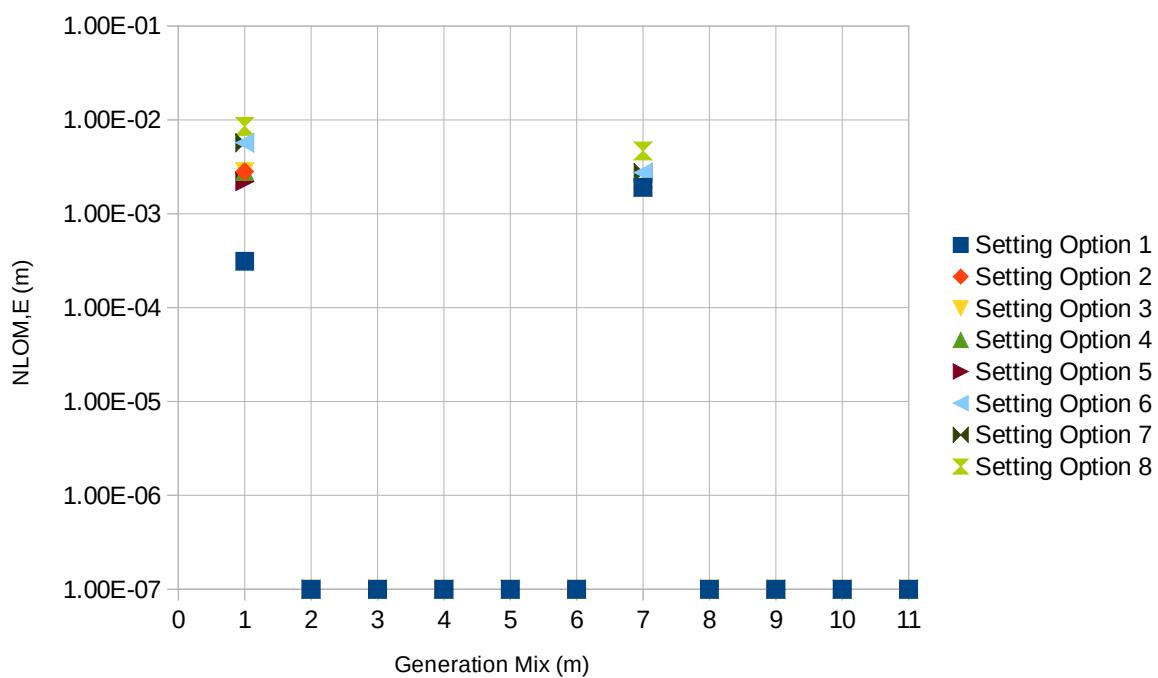

**Figure 37. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 4, Load Profile LP10**

## Appendix E: Full record of risk assessment results (Case Study 4)

Only setting option 1 is considered for ROCOF – 0.4 Hz/s with no additional delay.

### E.1. Summary Results

**Table 84. LOM risk assessment results for islanding scenario 3 (loss of supply to primary substation)**

Load Profile	$T_{NDZavr,s3}$ [min]	$N_{LOM,1DGG,s3}$	$P_{LOM,1DGG,s3}$	$N_{LOM,AR,s3}$	$P_{LOM,E,s3}$	$N_{LOM,E,s3}$
LP01	18.06	1.28E-04	1.22E-10	3.60E-02	3.42E-08	1.41E-01
LP02	12.91	1.68E-05	1.60E-11	4.73E-03	4.50E-09	2.62E-02
LP03	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
LP04	18.70	6.98E-06	6.64E-12	1.96E-03	1.87E-09	6.29E-03
LP05	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 85. LOM risk assessment results for islanding scenario 4 (loss of individual 11kV or 6.6kV feeder)**

Load Profile	$T_{NDZavr,s3}$ [min]	$N_{LOM,1DGG,s3}$	$P_{LOM,1DGG,s3}$	$N_{LOM,AR,s3}$	$P_{LOM,E,s3}$	$N_{LOM,E,s3}$
LP06	8.67	2.31E-05	2.20E-11	6.49E-03	6.17E-09	4.12E-02
LP07	10.45	4.21E-05	4.01E-11	1.18E-02	1.13E-08	4.81E-02
LP08	0.00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.64E-07
LP09	50.81	1.01E-03	9.59E-10	2.83E-01	2.69E-07	1.19E+00
LP10	7.10	4.14E-06	3.94E-12	1.16E-03	1.11E-09	8.32E-03

**Table 86. Summary LOM risk assessment results – based on maximum load profile figures**

LOM Scenario	$T_{NDZavr}$ [min]	$N_{LOM,1DGG}$	$P_{LOM,1DGG}$	$N_{LOM,AR}$	$P_{LOM,E}$	$N_{LOM,E}$
S3	18.7	1.28E-04	1.22E-10	3.60E-02	3.42E-08	1.41E-01
S4	50.81	1.01E-03	9.59E-10	2.83E-01	2.69E-07	1.19E+00
Combined S3 & S4	34.75	5.68E-04	5.40E-10	3.19E-01	3.04E-07	1.33E+00

**Table 87. Summary LOM risk assessment results – based on average load profile figures**

LOM Scenario	$T_{NDZavr}$ [min]	$N_{LOM,1DGG}$	$P_{LOM,1DGG}$	$N_{LOM,AR}$	$P_{LOM,E}$	$N_{LOM,E}$
S3	9.93	3.03E-05	2.89E-11	8.53E-03	8.11E-09	3.47E-02
S4	15.40	2.15E-04	2.05E-10	6.05E-02	5.76E-08	2.58E-01
Combined S3 & S4	12.67	1.23E-04	1.17E-10	6.91E-02	6.57E-08	2.93E-01

## E.2. Detailed results for different generation mixes and load profiles

**Table 88. LOM risk assessment results (islanding scenario 3, load profile LP01)**

Generation Mix (m)	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
1	54.91	6.17E-06	5.87E-12	1.73E-04	1.64E-10	1.54E-03
2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	86.27	5.39E-04	5.13E-10	8.62E-03	8.20E-09	3.79E-02
7	308.12	3.88E-03	3.69E-09	2.72E-02	2.58E-08	1.02E-01
8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 89. LOM risk assessment results (islanding scenario 3, load profile LP02)**

Generation Mix (m)	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
1	52.00	1.35E-22	1.29E-28	3.78E-21	3.60E-27	2.90E-05
2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	78.18	1.34E-04	1.27E-10	2.14E-03	2.04E-09	1.43E-02
7	131.40	3.69E-04	3.51E-10	2.58E-03	2.46E-09	1.18E-02
8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 90. LOM risk assessment results (islanding scenario 3, load profile LP3)**

Generation Mix (m)	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 91. LOM risk assessment results (islanding scenario 3, load profile LP4)**

<b>Generation Mix (m)</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
7	750.70	2.80E-04	2.67E-10	1.96E-03	1.87E-09	6.29E-03
8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 92. LOM risk assessment results (islanding scenario 3, load profile LP5)**

<b>Generation Mix (m)</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 93. LOM risk assessment results (islanding scenario 4, load profile LP06)**

<b>Generation Mix (m)</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	2.93E-06
2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	77.33	2.63E-05	2.50E-11	4.41E-04	4.19E-10	2.85E-03
7	183.05	9.73E-04	9.26E-10	6.05E-03	5.75E-09	3.84E-02
8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 94. LOM risk assessment results (islanding scenario 4, load profile LP07)**

<b>Generation Mix (m)</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	82.00	8.73E-07	8.31E-13	1.47E-05	1.39E-11	1.42E-04
7	250.78	1.90E-03	1.81E-09	1.18E-02	1.12E-08	4.80E-02
8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 95. LOM risk assessment results (islanding scenario 4, load profile LP8)**

<b>Generation Mix (m)</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
7	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	2.64E-07
8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00


**Table 96. LOM risk assessment results (islanding scenario 4, load profile LP9)**

<b>Generation Mix (m)</b>	<b><math>T_{NDZavr(m)}</math> [min]</b>	<b><math>N_{LOM,1DGG(m)}</math></b>	<b><math>P_{LOM,1DGG(m)}</math></b>	<b><math>N_{LOM,AR(m)}</math></b>	<b><math>P_{LOM,E(m)}</math></b>	<b><math>N_{LOM,E(m)}</math></b>
1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	554.45	1.05E-02	9.99E-09	1.76E-01	1.68E-07	7.57E-01
7	799.58	1.72E-02	1.64E-08	1.07E-01	1.02E-07	4.36E-01
8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00


**Table 97. LOM risk assessment results (islanding scenario 4, load profile LP10)**

Generation Mix (m)	$T_{NDZavr(m)}$ [min]	$N_{LOM,1DGG(m)}$	$P_{LOM,1DGG(m)}$	$N_{LOM,AR(m)}$	$P_{LOM,E(m)}$	$N_{LOM,E(m)}$
1	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	9.45E-04
2	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
3	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
4	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
5	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
6	52.55	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
7	179.16	1.87E-04	1.78E-10	1.16E-03	1.11E-09	7.38E-03
8	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
9	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
10	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00
11	0.00	0.00E+00	-0.00E+00	0.00E+00	0.00E+00	0.00E+00

### E.3. Result figures

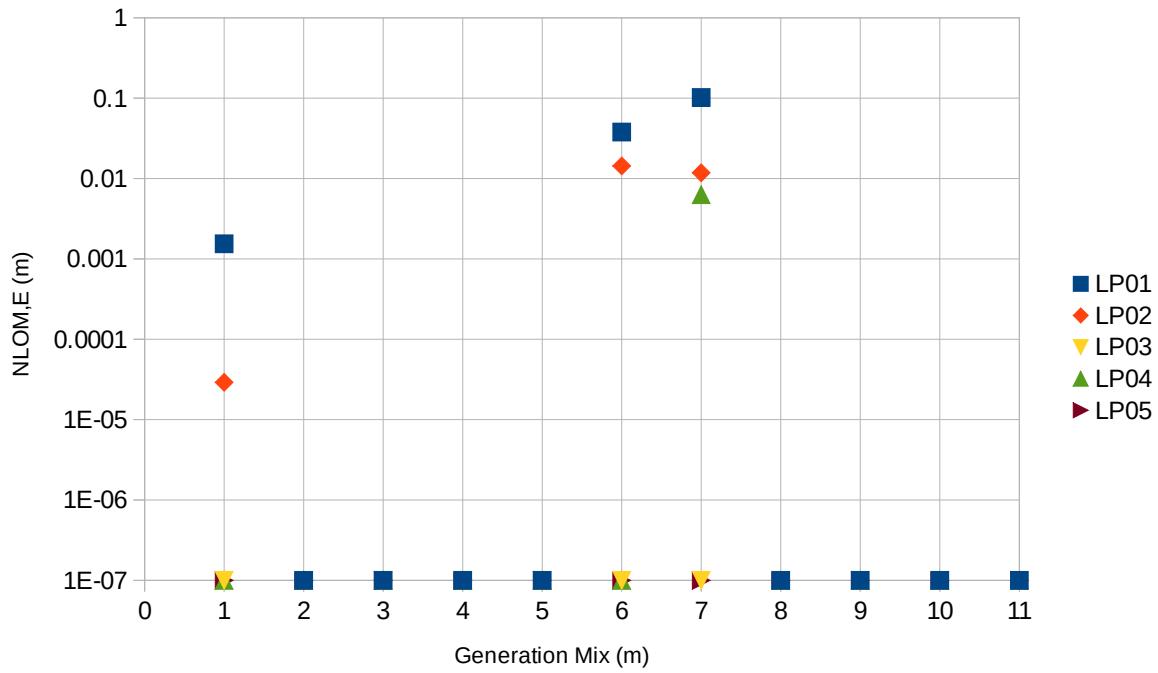

**Figure 38. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 3**

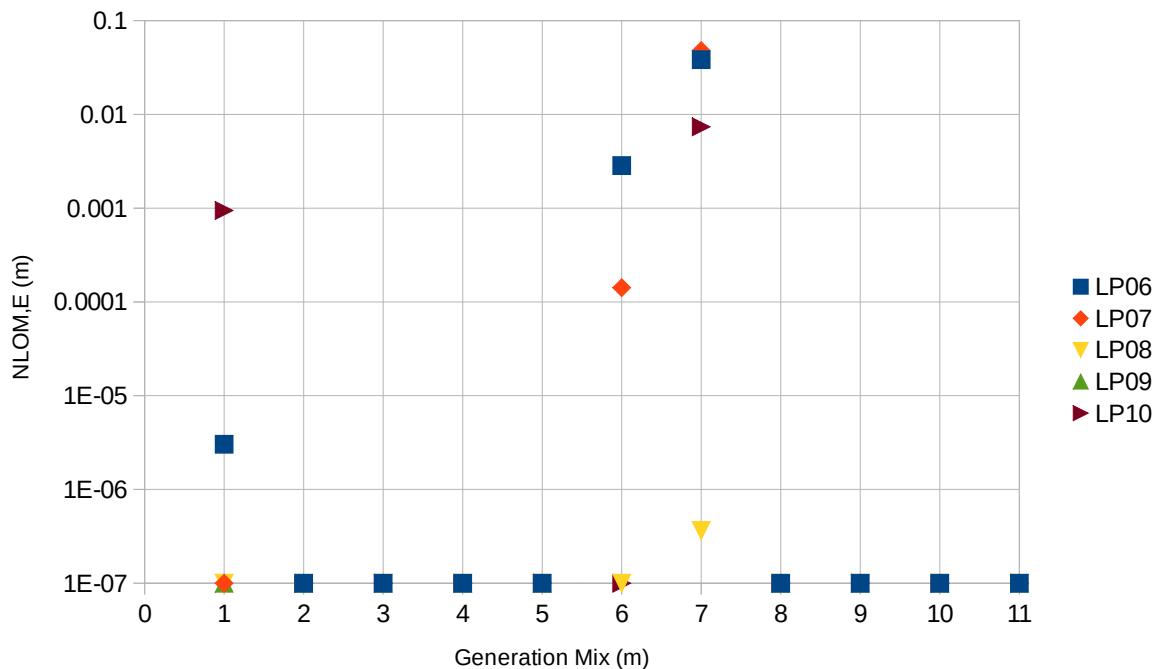

**Figure 39. Probability  $N_{LOM,E}$  of undetected islanding operation – Scenario 4**